

REPORT NO 20/91/DK

MAY 2021

GEOTECHNICAL INVESTIGATION FOR HALFWAY HOUSE WATER UPGRADE PROJECT: MIDRAND AND WATERFALL CITY, GAUTENG – FINAL

1. INTRODUCTIONS AND TERMS OF REFERENCE

At the request of Ms. T. Sibambato of Zutari Consulting Engineers, acting on behalf of Johannesburg Water (SOC) Ltd, we have carried out a geotechnical investigation for the proposed bulk water supply pipeline from Midrand to Waterfall City. Confirmation of our appointment to proceed with the investigation was received via an E-mail from Ms. T. Sibambato on 30 October 2020. A comprehensive Phase 1 preliminary report was submitted to Zutari on 16 December 2020. This Phase 2 report includes additional test pit profile information, as well as Dynamic Probe Super-Heavy test data. A comprehensive preliminary report excluding laboratory test results was submitted to the Client on 1 February 2021.

The following documents have been received from Zutari to assist with the investigation:

- Halfway House Water Upgrade Project: Geotechnical Investigation Scope of Work Document.
- Google Earth KMZ. file indicating the route of the proposed pipeline.
- Drawings indicating dimensions of the pipeline along the proposed route. inclusive of pipe-jacked sections below Allandale Road and the N1 Highway.
- Several Wayleaves for affected areas.

The proposed pipeline is of the order of 7,8 km in length and will aid in water supply to Midrand and Waterfall City. The invert levels for the pipeline are variable, ranging between 2,0m to 3,0m below existing ground surface for the most part, extending to depths of between 4,0m and 20,0m, below present ground surface, in areas of pipe-jacking below road surfaces.

The terms of reference for the investigation are as follows:

- i) to establish the nature and relevant engineering properties of the upper soil and rock strata underlying the site.
- ii) to comment on suitable excavation procedures for the installation of the pipeline.

- iii) to present comments on the use of the on-site soils for use as bedding sand, selected granular material and selected fill material in terms of SANS 1200LB.
- iv) to comment on any other geotechnical aspects that may affect the development.

2. SITE DESCRIPTION

The area of investigation is situated in Midrand and Waterfall City, Johannesburg. The pipeline is proposed to run from an existing pump station on the north-eastern corner of Dale and Old Pretoria Main Road, traversing in a general southerly direction towards the Jukskei Quarry, at which point the route turns towards the west, around The Villas development (Century Properties), then northwards to the corner of Allandale Road and Harry Galaun Drive. Due to the length of the proposed pipeline, vegetation ranges considerably from short to long veld grass with large trees, paved and tarred sections. A site locality plan is presented in **Figure 1** below.



Figure 1: Site Locality Plan, Halfway House Water Upgrade Project: Midrand and Waterfall City, Gauteng.

3. NATURE OF INVESTIGATION

3.1 Fieldwork

Sixty-three test pits (TP1 to TP28, TP31 to TP40, TP43 to TP67) have been excavated along the proposed pipeline route from 26 November 2020 to 15

January 2020. The majority of the test pits were hand-excavated, however test pits TP31 to TP36 were excavated using a CAT 426F2 4x4 tractor-loader-backhoe (backacter). The test pits were excavated to final depths ranging between of 0,5m and 3,0m below ground surface. All test pits were profiled in-situ by an engineering geologist and where necessary, disturbed soil samples were obtained for laboratory testing. The positions of the test pits are shown on the site plan enclosed in **Appendix A**. Copies of the recorded test pit soil profiles are presented in **Appendix B**. A number of Dynamic Cone Penetrometer tests were conducted at test pit positions where it was deemed prudent to make an assessment of the consistency of the soils below the hand-excavation level of 2,0m below existing ground surface for excavation purposes.

In addition to the test pitting, twelve Dynamic Prober Super-Heavy tests (DPSH1 to DPSH12) were executed at selected positions on the route. The testing was carried out in order to determine material excavability at depths below the termination depths of the test pits. The positions of the penetrometer tests were dictated by the locations where shallow pipe-jacking would be required below minor arterial roads. The positions of the DPSH tests are shown on the site plan enclosed in **Appendix A**. Copies of the recorded DPSH test results are presented in **Appendix D**.

Further to the above, four rotary cored boreholes (BH1 to BH4) were drilled, two at each proposed pipe-jacked positions below Allandale Road and the N1 Freeway. The rotary cored boreholes were carried out by Roelf Fourie Geotechnical Services between 24 November 2020 and 9 December 2020. The boreholes were logged by engineering geologists and a geotechnical engineer using recognised practice. The positions of the boreholes are shown on the site plan enclosed in **Appendix A**. Copies of the recorded boreholes logs are presented in **Appendix C**.

3.2 Laboratory Testing

The following laboratory tests have been carried out on the soil samples recovered from the test pits during the field investigation.

- i) Atterberg limits, particle size distribution and hydrometer analyses to determine basic engineering properties and to effect classification.
- ii) Moisture / density and California Bearing Ratio (CBR) tests to evaluate compaction and related strength characteristics.
- iii) Basson Index Tests to determine soil corrosivity towards concrete
- iv) DIN 50929-3 Tests to determine corrosivity of soil towards metal.

The laboratory test results are presented in **Appendix E**.

4. SITE GEOLOGY / SOIL PROFILE

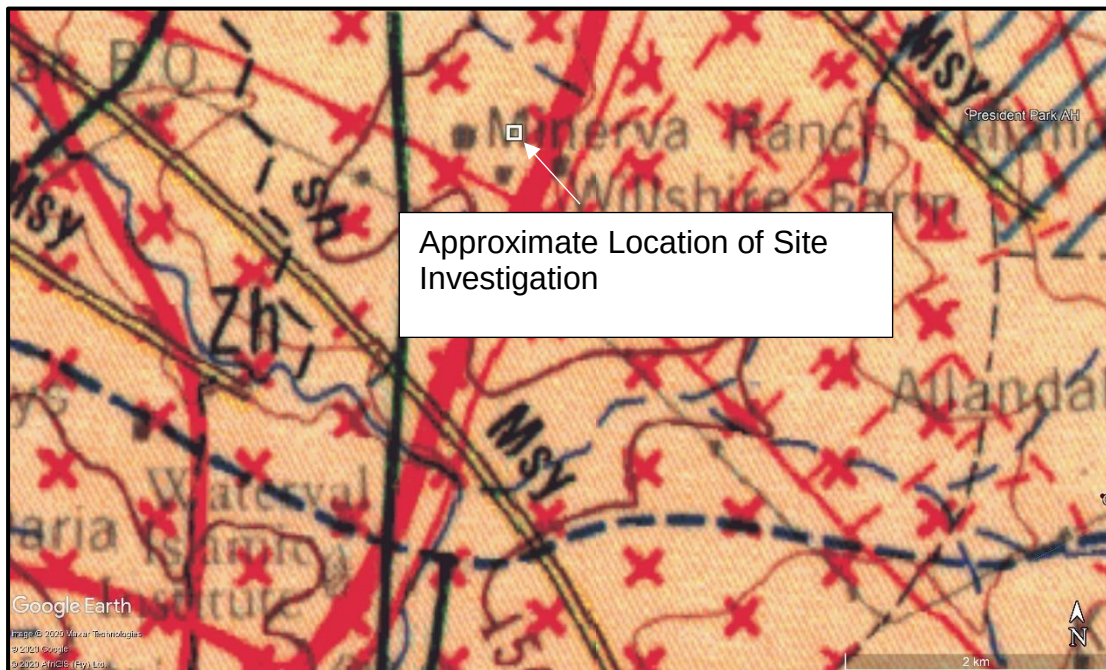


Figure 2. Regional Geology, Halfway House Water Upgrade Project: Midrand And Waterfall City, Gauteng.

Available geological maps (see **Figure 2**, above) indicate that the area of investigation is underlain by **granite** of the Johannesburg Granite Dome. This was confirmed during the present investigation. The granite has been locally intruded by a **diabase** dyke, encountered on the western-side of the N1 highway. Residual soils have developed from the weathering of the granite and diabase bedrock. The upper soil layer across the site comprises fill, transported hillwash and pebble marker horizons, inclusive of nodular and hardpan ferricrete.

Due to the length of the pipeline and materials encountered, the route has been sub-divided into six zones for ease of readability. The six sections are as follows:

- **Zone 1:** Intersection of Harry Galaun Drive and Allandale road, to the Waterfall Country Estate GATE 2 entrance on Jukskei View Drive
- **Zone 2:** Waterfall Country Estate GATE 2 entrance on Jukskei View Drive to the eastern edge of the N1 Highway.
- **Zone 3:** Intersection of Bridal Veil Road and Old Pretoria Main Road to the Intersection of Old Pretoria Main Road and Allandale Road (including boreholes on Allandale Road).
- **Zone 4:** Intersection of Dale Road and Old Pretoria Main Road to intersection of Allandale Road and Morkels Close.
- **Zone 5:** Pipe Jacking section under Allandale Road.
- **Zone 6:** Pipe Jacking section under N1 Highway.

The zones and associated test pit and boreholes locations are enclosed in **Appendix A**. Summaries of the various soil and rock thicknesses from the test pit profiles / borehole logs, are presented in **Table 1 to 6** below.

Zone 1:

Table 1: Summary of the test pit soil horizon thickness Zone 1 (m)

TP nr.	Horizon thicknesses and Description													Termination Depth (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Reworked Residual Diabase (m)	Residual Diabase (m)	Very Soft Rock Diabase (m)	Soft Rock Diabase (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)	
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel	Slightly clayey sandy silt	Slightly clayey sandy silt					
1	0,0-2,0	-	-	-	-	-	-	-	-	-	-	-	-	2,0
2	0,0-0,5	-	0,5-0,7	-	-	0,7-1,3	-	-	-	-	-	1,3	-	1,3
3	-	0,0-0,4	0,4-0,5	-	-	0,5-0,8	0,8-1,3	-	-	-	-	1,3	-	1,3
4	0,0-0,9	-	-	-	1,1-1,3	-	0,9-1,1	-	-	-	-	-	-	1,3
5	-	0,0-0,4	0,4-0,7	-	0,7-0,9	-	-	-	-	-	-	-	-	0,9
6	-	0,0-0,6	-	-	1,2-1,4	-	0,6-1,2	-	-	-	-	-	-	1,4
7	-	0,0-0,95	0,95-1,05	-	1,05-1,3	-	-	-	-	-	-	-	-	1,3
8	-	0,0-0,8	0,8-1,05	-	-	-	1,05-1,4	-	-	-	-	-	-	1,4
9	0,0-0,6	-	0,6-0,8	-	1,4	0,8-1,4	-	-	-	-	-	-	-	1,4
10	0,0-0,5	0,5-0,9	0,9-1,1	-	-	-	1,1-1,4	-	-	-	-	-	-	1,4
11	0,0-0,25	0,25-0,5	-	0,5-0,9	0,9	-	-	-	-	-	-	-	-	0,9

No perched water table or zones of groundwater seepage was noted in any of the test pits excavated across this zone at the time of the investigation.

Zone 2:

Table 2: Summary of the test pit soil horizon thickness Zone 2 (m)

TP nr.	Horizon thicknesses and Description										Termination Depth (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Reworked Residual Diabase (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)	
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel	Slightly clayey sandy silt			
12	-	0,0-0,3	0,3-0,5	-	-	0,5-0,8	0,8-2,0		2,0		2,0
13	-	-	0,0-0,2	-	-	0,2-1,3	-	-	-	-	1,3
14	-	0,0-0,5	0,5-0,8	-	-	0,8-1,6	1,6-2,0	-	-	-	2,0
15	-	0,0-0,3	0,3-0,5	-	-	0,5-0,7	0,7-2,2	-	2,2	-	2,2
16	-	0,0-0,3	0,3-0,4	-	-	0,4-0,8	0,8-2,1	-	2,1	-	2,1
17	-	0,0-0,2	0,2-0,6	-	-	0,6-1,6	1,6-2,1	-	-	-	2,1
18	-	0,0-0,2	0,2-0,4	-	-	-	0,4-0,6	-	-	0,6	0,6
19	-	0,0-0,4	-	-	-	-	0,4-1,6	-	1,6	-	1,6
20	0,0-0,4	-	-	-	-	-	0,4-1,0	-	1,0	-	1,0
21	0,0-0,4	-	-	-	-	-	0,4-1,0	-	1,0	-	1,0
22	0,0-0,4	-	-	-	-	-	0,4-1,0	-	1,0	-	1,0
23	0,0-1,4	-	-	-	-	-	1,4-1,6	-	1,6	-	1,6
24	0,0-1,4	-	-	-	-	-	1,4-1,6	-	1,6	-	1,6
25	0,0-2,0	-	-	-	-	-	-	-	-	-	2,0
26	0,0-2,0	-	-	-	-	-	-	-	-	-	2,0
27	0,0-2,0	-	-	-	-	-	-	-	-	-	2,0
28	0,0-0,3	0,3-1,5	-	-	-	-	-	1,5-2,0	-	-	2,0

Slight seepage was encountered at the base of test pits TP14 and TP19 at the time of the investigation.

Zone 3:

Table 3: Summary of the test pit soil horizon thickness Zone 3 (m)

TP nr.	Horizon thickness and Description									Termination Depth (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)	
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel			
31	-	0,0-0,35	0,35-0,5	0,5-1,7	-	-	1,0-3,0	-	-	3,0
32	-	0,0-0,3	0,3-0,5	0,5-1,5	-	-	1,5-3,0	-	-	3,0
33	-	0,0-0,4	0,4-0,6	0,6-1,3	-	-	1,3-3,0	-	-	3,0
34	-	0,0-0,3	-	0,3-1,5	-	-	1,5-3,0	-	-	3,0
35	-	-	-	-	-	-	-	-	0,0	0,0
36	-	-	0,0-0,3	0,3-0,5	0,5-2,0	-	2,0-3,0	-	-	3,0

Slight seepage was encountered at the base of test pit TP36 at the time of the investigation. It should be noted that hard rock granite was present at test pit TP35 at surface.

Zone 4:

Table 4: Summary of the test pit soil horizon thickness Zone 4 (m)

TP nr.	Horizon thicknesses and Description									Termination Depth (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)	
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel			
46	0,0-2,0	-	-	-	-	-	-	-	-	2,0
47	0,0-2,0	-	-	-	-	-	-	-	-	2,0
48	0,0-0,8	-	-	-	-	-	-	-	0,8	0,8
49	0,0-1,5	-	-	-	1,5-1,6	-	-	-	-	1,6
50	0,0-1,0	-	-	1,0-1,1	-	-	-	-	-	1,1
51	0,0-0,12	-	-	1,2-1,5	-	-	-	-	-	1,5
52	-	-	-	0,0-0,9	0,9-1,5	-	-	-	-	1,5
53	0,0-0,2	-	-	0,2-0,7	0,7-1,4	-	-	-	-	1,4
54	-	0,0-0,5	0,5-0,8	0,8-0,9	-	-	-	-	-	0,9
55	-	0,0-0,5	-	-	-	-	0,5-1,4	1,4	-	1,4
56	0,0-0,5	0,5-0,9	-	0,9-1,2	1,2-1,4	-	-	-	-	1,4
57	0,0-1,3	-	-	1,3-1,4	1,4-1,5	-	-	-	-	1,5
58	0,0-0,9	0,9-1,3	-	1,3-1,5	1,5-1,6	-	-	-	-	1,6
59	-	0,0-1,3	-	1,3-1,4	1,4	-	-	-	-	1,4
60	0,0-0,2	0,2-1,0	-	1,0-1,2	1,2	-	-	-	-	1,2
61	0,0-0,7	0,7-1,4	-	1,4-1,6	1,6-1,7	-	-	-	-	1,7
62	0,0-0,7	0,7-1,5	-	-	-	-	-	-	-	1,5
63	0,0-0,5	-	-	-	-	-	-	-	-	0,5
64	0,0-0,15	0,15-0,7	-	0,7-0,85	0,85-0,9	-	-	-	-	0,9
65	0,0-0,8	0,8-1,3	-	1,3-1,5	1,5-1,6	-	-	-	-	1,6
66	0,0-0,7	0,7-0,85	-	0,85-1,1	1,1-1,2	-	-	-	-	1,2
67	0,0-1,6	-	-	-	-	-	-	-	-	1,6

Slight groundwater seepage was encountered at the base of test pit TP58 and TP62 at the time of the investigation.

Zone 5:

Table 5: Summary of the borehole soil and rock horizon thickness Zone 5 (m)

	Horizon thicknesses and Description													Termination Depth (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Reworked Residual Diabase (m)	Residual Diabase (m)	Very Soft Rock Diabase (m)	Soft Rock Diabase (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)	
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel	Slightly clayey sandy silt	Slightly clayey sandy silt					
BH1	0,0-0,5	-	-	0,5-0,85	0,85-1,65	1,65-2,85	2,85-6,4	-	-	-	-	-	6,4-10,0	10,0
BH2	0,0-1,6	1,6-1,8	-	1,8-2,0	2,0-2,3	2,3-6,2 ; 6,4-7,5	-	-	-	-	-	-	6,2-6,4 ; 7,5-10,0	10,0

Rest water levels of 5,0m and 3,0m were measure in boreholes BH1 and BH2, respectively.

Zone 6:

Table 6: Summary of the borehole soil and rock horizon thickness Zone 6 (m)

	Horizon thicknesses and Description													Termination Depth (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Reworked Residual Diabase (m)	Residual Diabase (m)	Very Soft Rock Diabase (m)	Soft Rock Diabase (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)	
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel	Slightly clayey sandy silt	Slightly clayey sandy silt					
BH3	-	0,0-1,0	1,0-1,5	-	-	-	-		1,5-3,7	3,7-9,7	9,7-10,0	-	-	10,0
BH4	-	0,0-1,0	-	-	-	1,0-1,4	1,4-4,5	-	-	-	-	4,5-9,0	9,0-20,0	20,0

Rest water levels of 4,0m and 11,0m were measured in boreholes BH3 and BH4, respectively.

5. BULK EARTHWORKS

5.1 Excavation Procedures

Excavation procedures for the pipeline trench excavation has been evaluated according to the South African National Standards standardized classification for excavations (SANS 1200D, DA & DB). This evaluation and classification (as indicated in **Table 7 to 12** below) was determined by all information obtained from the test pitting, dynamic probe testing and borehole operations. the test pit profiles and DPSH tests results, excavability along the route of the pipeline is classified as presented in Tables 7 to 12 below.

Zone 1:

Table 7: A summary of the excavability of materials in Zone 1

TP nr.	Horizon and Description													Termination Depth (m)	Soft Material (m)	Intermediate Material (m)	Hard Rock Material (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Reworked Residual Diabase (m)	Residual Diabase (m)	Very Soft Rock Diabase (m)	Soft Rock Diabase (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)				
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel	Slightly clayey sandy silt	Slightly clayey sandy silt								
1	0.0-2.0	-	-	-	-	-	-	-	-	-	-	-	-	2.0	0.0-3.0	-	-
2	0.0-0.5	-	0.5-0.7	-	-	0.7-1.3	-	-	-	-	-	1.3	>1.3	1.3	0.0-1.3	-	>1.3
3	-	0.0-0.4	0.4-0.5	-	-	0.5-0.8	0.8-1.3	-	-	-	-	1.3	>1.3	1.3	0.0-1.3	-	>1.3
4	0.0-0.87	-	-	-	1.1-1.3	-	0.8-1.1	-	-	-	-	-	-	1.3	0.0-1.3	1.3	-
5	-	0.0-0.4	0.4-0.7	-	0.7-0.9	-	-	-	-	-	-	-	-	0.9	0.0-0.7	0.7-0.9	-
6	-	0.0-0.6	-	-	1.2-1.35	-	0.6-1.2	-	-	-	-	-	-	1.4	0.0-1.2	1.2-1.35	-
7	-	0.0-0.95	0.95-1.05	-	1.05-1.25	-	-	-	-	-	-	-	-	1.3	0.0-1.05	1.05-1.25	-
8	-	0.0-0.8	0.8-1.05	-	-	-	1.05-1.4	-	-	-	-	-	-	1.4	0.0-1.4	-	>1.4
9	0.0-0.6	-	0.6-0.8	-	1.4	0.8-1.4	-	-	-	-	-	-	-	1.4	0.0-1.4	1.4	-
10	0.0-0.5	0.5-0.9	0.9-1.1	-	-	-	1.1-1.4	-	-	-	-	-	-	1.4	0.0-1.4	-	>1.4
11	0.0-0.25	0.25-0.5	-	0.5-0.85	0.9	-	-	-	-	-	-	-	-	0.9	0.0-0.9	0.9	-

Zone 2:

Table 8: A summary of the excavability of materials in Zone 2

TP nr.	Horizon and Description										Termination Depth (m)	Soft Material (m)	Intermediate Material (m)	Hard Rock Material (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Reworked Residual Diabase (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)				
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel	Slightly clayey sandy silt						
12	-	0,0-0,3	0,3-0,5	-	-	0,5-0,8	0,8-2,0		2,0	>2,0	2,0	0,0-2,0	-	>2,0
13	-	-	0,0-0,2	-	-	0,2-1,3	-	-	-	-	1,3	0,0-1,3	-	-
14	-	0,0-0,5	0,5-0,8	-	-	0,8-1,6	1,6-2,0	-	-	-	2,0	0,0-2,6	2,6-3,1	3,1
15	-	0,0-0,3	0,3-0,5	-	-	0,5-0,7	0,7-2,2	-	2,2	>2,2	2,2	0,0-2,2	-	>2,2
16	-	0,0-0,3	0,3-0,4	-	-	0,4-0,8	0,8-2,1	-	2,1	>2,1	2,1	0,0-2,1	-	>2,1
17	-	0,0-0,2	0,2-0,6	-	-	0,6-1,6	1,6-2,1	-	-	-	2,1	0,0-3,0	-	-
18	-	0,0-0,2	0,2-0,4	-	-	-	0,4-0,6	-	-	0,6	0,6	0,0-0,6	-	0,6
19	-	0,0-0,4	-	-	-	-	0,4-1,6	-	1,6	>1,6	1,6	0,0-1,6	-	>1,6
20	0,0-0,4	-	-	-	-	-	0,4-1,0	-	1,0	>1,0	1,0	0,0-1,0	-	>1,0
21	0,0-0,4	-	-	-	-	-	0,4-1,0	-	1,0	>1,0	1,0	0,0-1,0	1,0-1,5	>1,0
22	0,0-0,4	-	-	-	-	-	0,4-1,0	-	1,0	>1,0	1,0	0,0-1,0	1,0-1,5	>1,0
23	0,0-1,4	-	-	-	-	-	1,4-1,6	-	1,6	>1,6	1,6	0,0-1,6	1,6-2,1	>1,6
24	0,0-1,4	-	-	-	-	-	1,4-1,6	-	1,6	>1,6	1,6	0,0-1,6	1,6-2,1	>1,6
25	0,0-2,0	-	-	-	-	-	-	-	-	-	2,0	0,0-2,5	-	>2,5
26	0,0-2,0	-	-	-	-	-	-	-	-	-	2,0	0,0-2,5	-	>2,5
27	0,0-2,0	-	-	-	-	-	-	-	-	-	2,0	0,0-2,5	-	>2,5
28	0,0-0,3	0,3-1,5	-	-	-	-	-	1,5-2,0	-	-	2,0	0,0-3,0	-	-

Zone 3:

Table 9: A summary of the excavability of materials in Zone 3

TP nr.	Horizon and Description									Termination Depth (m)	Soft Material (m)	Intermediate Material (m)	Hard Rock Material (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)				
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel						
31	-	0,0-0,35	0,35-0,5	0,5-1,7	-	-	1,0-3,0	-	-	3,0	0,0-3,0	-	-
32	-	0,0-0,3	0,3-0,5	0,5-1,5	-	-	1,5-3,0	-	-	3,0	0,0-3,0	-	-
33	-	0,0-0,4	0,4-0,6	0,6-1,3	-	-	1,3-3,0	-	-	3,0	0,0-3,0	-	-
34	-	0,0-0,3	-	0,3-1,5	-	-	1,5-3,0	-	-	3,0	0,0-3,0	-	-
35	-	-	-	-	-	-	-	-	0,0	0,0	-	-	0,0
36	-	-	0,0-0,3	0,3-0,5	0,5-2,0	-	2,0-3,0	-	-	3,0	0,0-3,0	-	-

Zone 4:

Table 10: A summary of the excavability of materials in Zone 4

TP nr.	Horizon and Description									Termination Depth (m)	Soft Material (m)	Intermediate Material (m)	Hard Rock Material (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)				
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel						
44	0,0-0,4	0,4-1,0	1,0-1,15	-	-	1,15-1,5	-	-	-	1,5	0,0-3,3	3,3-3,8	3,8
45	0,0-0,2	-	-	-	-	0,2-0,6	0,6-1,5	-	-	1,5	0,0-4,8	4,8-5,3	5,3
46	0,0-2,0	-	-	-	-	-	-	-	-	2,0	2,0-3,0	-	-
47	0,0-2,0	-	-	-	-	-	-	-	-	2,0	2,0-3,0	-	-
48	0,0-0,8	-	-	-	-	-	-	-	0,8	0,8	0,0-0,8	-	0,8
49	0,0-1,5	-	-	-	1,5-1,6	-	-	-	-	1,6	0,0-1,6	-	>1,6
50	0,0-1,0	-	-	1,0-1,1	-	-	-	-	-	1,1	0,0-1,1	-	>1,1
51	0,0-0,12	-	-	1,2-1,5	-	-	-	-	-	1,5	0,0-1,5	1,5	-
52	-	-	-	0,0-0,9	0,9-1,5	-	-	-	-	1,5	0,0-1,5	1,5	-
53	0,0-0,2	-	-	0,2-0,7	0,7-1,4	-	-	-	-	1,4	0,0-1,4	1,4	-
54	-	0,0-0,5	0,5-0,8	0,8-0,9	-	-	-	-	-	0,9	0,0-0,9	0,9	-
55	-	0,0-0,5	-	-	-	-	0,5-1,4	1,4	-	1,4	0,0-1,4	-	>1,4
56	0,0-0,5	0,5-0,9	-	0,9-1,2	1,2-1,4	-	-	-	-	1,4	0,0-1,4	1,4	-
57	0,0-1,3	-	-	1,3-1,4	1,4-1,5	-	-	-	-	1,5	0,0-1,45	1,5	-
58	0,0-0,9	0,9-1,3	-	1,3-1,5	1,5-1,6	-	-	-	-	1,6	0,0-1,6	1,6	-
59	-	0,0-1,3	-	1,3-1,4	1,4	-	-	-	-	1,4	0,0-1,4	1,4	-
60	0,0-0,2	0,2-1,0	-	1,0-1,2	1,2	-	-	-	-	1,2	0,0-1,2	1,2	-
61	0,0-0,7	0,7-1,4	-	1,4-1,6	1,6-1,7	-	-	-	-	1,7	0,0-1,65	-	-
62	0,0-0,7	0,7-1,5	-	-	-	-	-	-	-	1,5	0,0-1,5	1,5	-
63	0,0-0,5	-	-	-	-	-	-	-	-	0,5	0,0-0,5	-	-
64	0,0-0,15	0,15-0,7	-	0,7-0,85	0,85-0,9	-	-	-	-	0,9	0,0-0,9	0,9	-
65	0,0-0,8	0,8-1,3	-	1,3-1,5	1,5-1,6	-	-	-	-	1,6	0,0-1,55	1,6	-
66	0,0-0,7	0,7-0,85	-	0,85-1,1	1,1-1,2	-	-	-	-	1,2	0,0-1,2	1,2	-
67	0,0-1,6	-	-	-	-	-	-	-	-	1,6	0,0-1,6	-	>6,0

Zone 5:

Table 11: A summary of the excavability of materials in Zone 5

	Horizon and Description																
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Reworked Residual Diabase (m)	Residual Diabase (m)	Very Soft Rock Diabase (m)	Soft Rock Diabase (m)	Very Soft Rock granite (m)	Soft Granite or Better (m)	Termination Depth (m)	Soft Material (m)	Intermediate Material (m)	Hard Rock Material (m)
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemente d silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel	Slightly clayey sandy silt	Slightly clayey sandy silt								
BH1	0,0-0,5	-	-	0,5-0,85	0,85-1,65	1,65-2,85	2,85-6,4	-	-	-	-	-	6,4-10,0	10,0	0,0-0,85 ; 1,65-6,4	0,85-1,65	6,4-10,0
BH2	0,0-1,6	1,6-1,8	-	1,8-2,0	2,0-2,3	2,3-6,2 ; 6,4-7,5	-	-	-	-	-	-	6,2-6,4 ; 7,5-10,0	10,0	0,0-2,0 ; 2,3-6,2 ; 6,4-7,5	2,0-2,3	6,2-6,4 ; 7,5-10,0

Zone 6:

Table 12: A summary of the excavability of materials in Zone 6

	Horizon and Description													Termination Depth (m)	Soft Material (m)	Intermediate Material (m)	Hard Rock Material (m)
	Fill (m)	Hillwash (m)	Pebble Marker (m)	Nodular Ferricrete (m)	Hardpan Ferricrete (m)	Reworked Residual Granite (m)	Residual Granite (m)	Reworked Residual Diabase (m)	Residual Diabase (m)	Very Soft Rock Diabase (m)	Soft Rock Diabase (m)	Very Soft Rock granite (m)	Soft Rock Granite or Better (m)				
	Silty sand with variable amounts of gravel	Silty sand with scattered gravels	Gravelly silty sand	Gravelly silty sand	Very dense to very soft rock strongly cemented silty sand	Slightly clayey silty sand with scattered fine to medium gravel	Silty sand with scattered fine to medium gravel	Slightly clayey sandy silt	Slightly clayey sandy silt								
BH3	-	0,0-1,0	1,0-1,5	-	-	-	-	-	1,5-3,7	3,7-9,7	9,7-10,0	-	-	10,0	0,0-3,7	3,7-9,7	9,7-10,0
BH4	-	0,0-1,0	-	-	-	1,0-1,4	1,4-4,5	-	-	-	-	4,5-9,0	9,0-20,0	20,0	0,0-4,5	4,5-9,0	9,0-20,0

The following points should be noted with regards to the excavability of material:

- Soft to intermediate excavation material could be removed using **medium to heavy earthmoving equipment and / or powertools.**
- Hard rock excavation material would essentially require **blasting** for removal.
- Based on our experience of the granitic profile within the Midrand and Waterfall City areas, very soft rock granite material is typically of the order of 0,5m to 1,0m thick, at which point a transition to soft rock granite is encountered (blast quality material).
- As noted in the tables above, the depths to blast quality material is highly variable throughout the length of the pipeline. The undulatory topography of the granitic bedrock is a common feature within South Africa.

6. STABILITY OF OPEN TRENCH EXCAVATIONS

In general, all of the test pits excavated across the site exhibited stable sidewalls. It is envisaged that stability for open trench excavations for longer-term conditions could be provided by battering the excavation walls back to suitable slope angles. In this regard for planning and budget purposes, the recommended batter slope across the alignment should not exceed 1V:1H.

7. MATERIAL USAGE & COMMERCIAL SOURCING


Laboratory testing has been carried out on the upper soil horizons to determine their suitability for use as construction material for pipe bedding, selected granular material and selected fill material, according to SANS 1200LB. Based on the laboratory test results, as well as the fieldwork information, material usage may be summarized in as per the table below.

SOIL TYPE	POTENTIAL USES				COMMENTS
	SELECTED FILL	SELECTED GRANULAR	GENERAL FILL	SPOIL	
Fill	x		x		Upper 150mm contains abundant organic matter and should be removed to spoil. Deeper material suitable for use as indicated
Hillwash	x		x		Upper 150mm contains abundant organic matter and should be removed to spoil. Deeper material suitable for use as indicated
Pebble Marker	x		x		Where present at surface, the upper 150mm contains abundant organic material and should be removed to spoil. Deeper mater suitable for use as indicated
Nodular Ferricrete	x		x		Suitable for use as indicated
Hardpan Ferricrete	x		x		Hardpan ferricrete should be crushed to a suitable size prior to use a bedding material. Alternatively the hardpan material should be removed to spoil where encountered
Reworked Residual Granite	x		x		Suitable for use as indicated
Residual Granite	x		x		Suitable for use as indicated
Very Soft Rock Granite	x		x		Very Soft Rock Granite should be crushed to a suitable size prior to use a bedding material. Alternatively the very soft rock granite material should be removed to spoil where encountered
Soft Rock Granite or Better	x		x		Soft rock granite should be crushed to a suitable size prior to use a bedding material. Alternatively the soft rock granite should be removed to spoil where encountered
Reworked Residual Diabase				x	Moderately to highly plastic and thus unsuitable for use as construction material. Should be removed to spoil where intersected
Residual Diabase				x	Moderately to highly plastic and thus unsuitable for use as construction material. Should be removed to spoil where intersected
Very Soft Rock Diabase				x	Particle size exceeds that of 30mm. Once crushed, it is our considered opinion that this material would exhibit a moderately to high plastic nature
Soft Rock Diabase or Better	x		x		Soft rock diabase should be crushed to a suitable size prior to use a bedding material. Alternatively the soft rock diabase should be removed to spoil where encountered

It is noted from the table that none of the material encountered along the pipeline route would prove suitable for use as **bedding sand and / or selected granular material**. These would therefore need to be sourced and imported to the site for such purposes.



M CROSSMAN Pr Eng
CROSSMAN, PAPE & ASSOCIATES



W KRETZINGER Pr Sci. Nat

APPENDIX A:
SITE PLAN WITH TEST PIT AND BOREHOLE
LOCATIONS



**REPORT 20/91/DK:
GEOTECHNICAL INVESTIGATION FOR HALFWAY
HOUSE WATER UPGRADE PROJECT
PHASE 2**

**SITE PLAN INDICATING APPROXIMATE POSITIONS
OF TEST PITS, BOREHOLES AND DPSH TESTS**

Crossman, Pape & Associates
Geotechnical Engineers and Engineering Geologists
Tel. (+27)11 465 1699
Cell. (+27)82 556 7302

**SCALE:
NOT TO SCALE**

**DATE:
JANUARY 2021**



**REPORT 20/91/DK:
 GEOTECHNICAL INVESTIGATION FOR HALFWAY
 HOUSE WATER UPGRADE PROJECT
 PHASE 2**

**SITE PLAN INDICATING APPROXIMATE POSITIONS
 OF TEST PITS AND DPSH TESTS ZONE 1**

Crossman, Pape & Associates
 Geotechnical Engineers and Engineering Geologists
 Tel. (+27)11 465 1699
 Cell. (+27)82 556 7302

**SCALE:
 NOT TO SCALE**

**DATE:
 JANUARY 2021**



**REPORT 20/91/DK:
GEOTECHNICAL INVESTIGATION FOR HALFWAY
HOUSE WATER UPGRADE PROJECT
PHASE 2**

**SITE PLAN INDICATING APPROXIMATE POSITIONS
OF TEST PITS AND BOREHOLES
ZONE 2**

Crossman, Pape & Associates
Geotechnical Engineers and Engineering Geologists
Tel. (+27)11 465 1699
Cell. (+27)82 556 7302

**SCALE:
NOT TO SCALE**

**DATE:
JANUARY 2021**



**REPORT 20/91/DK:
GEOTECHNICAL INVESTIGATION FOR HALFWAY
HOUSE WATER UPGRADE PROJECT
PHASE 2**

**SITE PLAN INDICATING APPROXIMATE POSITIONS
OF TEST PITS AND BOREHOLES
ZONE 3**

Crossman, Pape & Associates
Geotechnical Engineers and Engineering Geologists
Tel. (+27)11 465 1699
Cell. (+27)82 556 7302

**SCALE:
NOT TO SCALE**

**DATE:
JANUARY 2021**




**REPORT 20/91/DK:
 GEOTECHNICAL INVESTIGATION FOR HALFWAY
 HOUSE WATER UPGRADE PROJECT
 PHASE 2**

**SITE PLAN INDICATING APPROXIMATE POSITIONS
 OF TEST PITS AND DPSH TESTS
 ZONE 4**

Crossman, Pape & Associates
 Geotechnical Engineers and Engineering Geologists
 Tel. (+27)11 465 1699
 Cell. (+27)82 556 7302

**SCALE:
 NOT TO SCALE**

**DATE:
 JANUARY 2021**

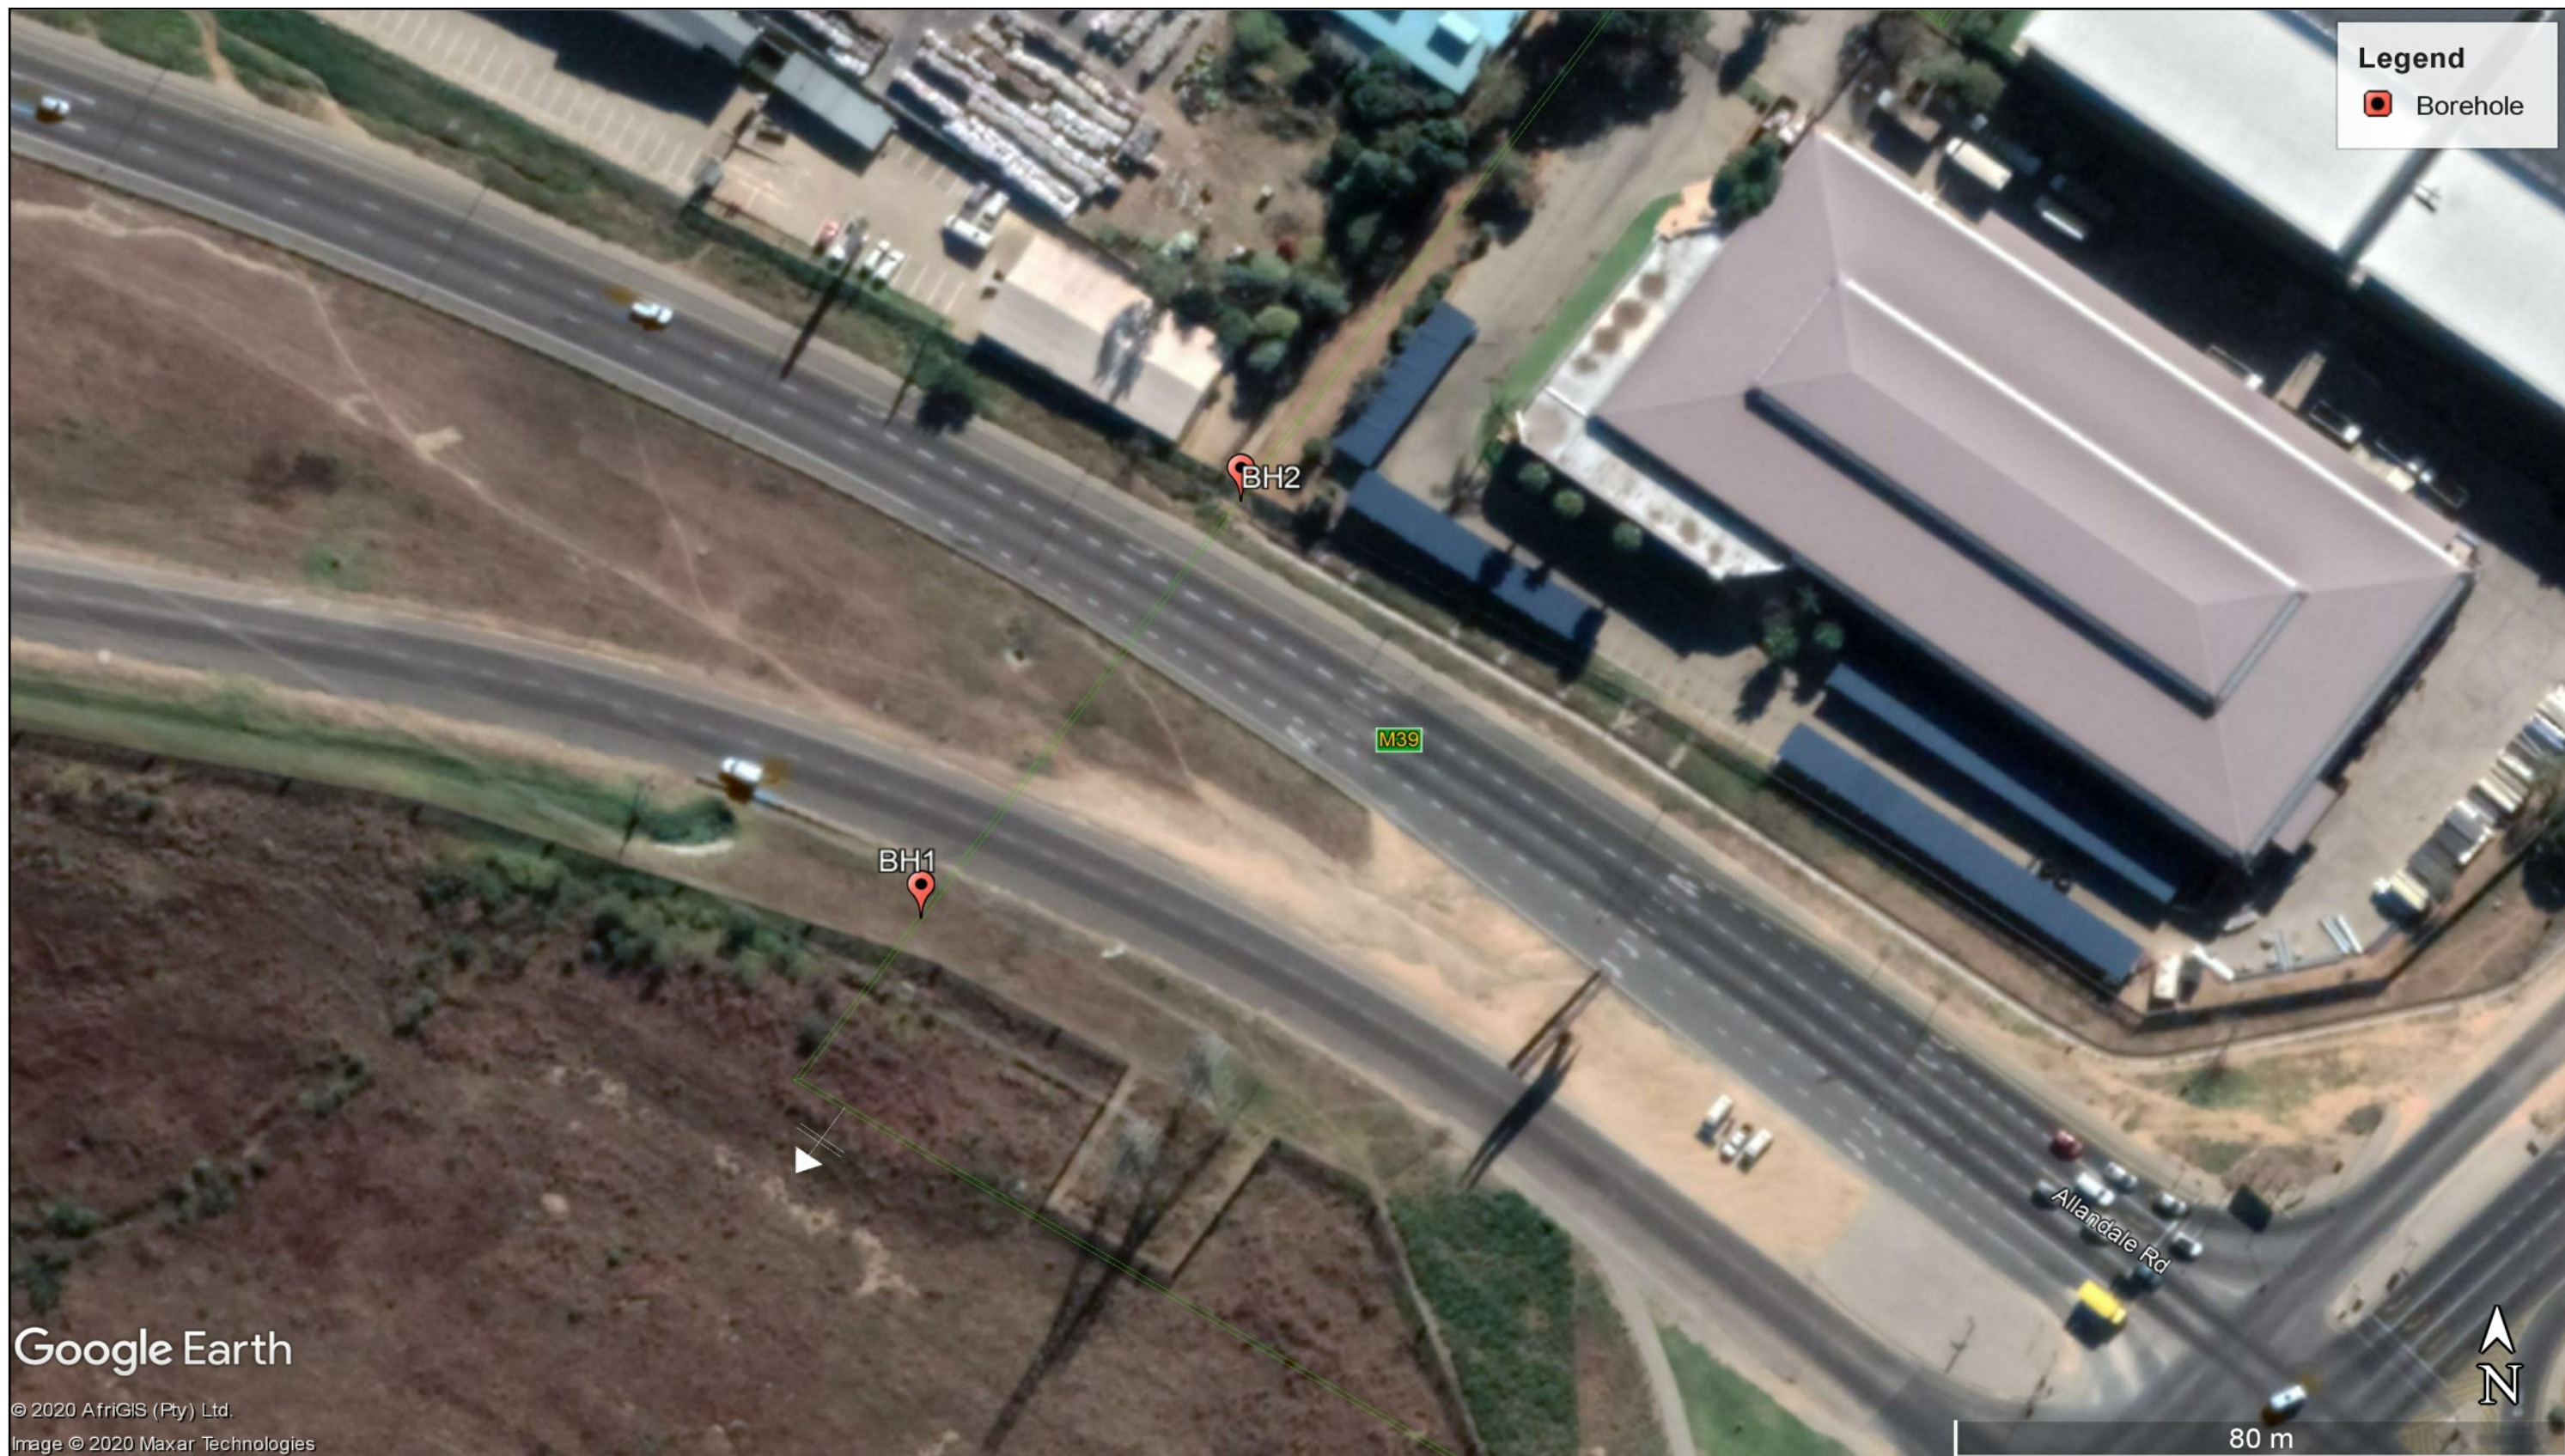

**REPORT 20/91/DK:
GEOTECHNICAL INVESTIGATION FOR HALFWAY
HOUSE WATER UPGRADE PROJECT
PHASE 1**

**SITE PLAN INDICATING APPROXIMATE POSITIONS
OF BOREHOLES ZONE 5**

Crossman, Pape & Associates
Geotechnical Engineers and Engineering Geologists
Tel. (+27)11 465 1699
Cell. (+27)82 556 7302

**SCALE:
NOT TO SCALE**

**DATE:
DECEMBER 2020**



**REPORT 20/91/DK:
GEOTECHNICAL INVESTIGATION FOR HALFWAY
HOUSE WATER UPGRADE PROJECT
PHASE 1**

**SITE PLAN INDICATING APPROXIMATE POSITIONS
OF BOREHOLES ZONE 6**


Crossman, Pape & Associates
Geotechnical Engineers and Engineering Geologists
Tel. (+27)11 465 1699
Cell. (+27)82 556 7302

**SCALE:
NOT TO SCALE**

**DATE:
DECEMBER 2020**

APPENDIX B: **TEST PIT SOIL PROFILES**

Scale
1:20



0.00

Slightly moist to moist light grey beige speckled orange and white medium dense moderately compacted slightly clayey silty gravelly sand with scattered cobbles. Fill.

2.00

NOTES


- 1) No refusal. No DCP refusal at 3,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP01

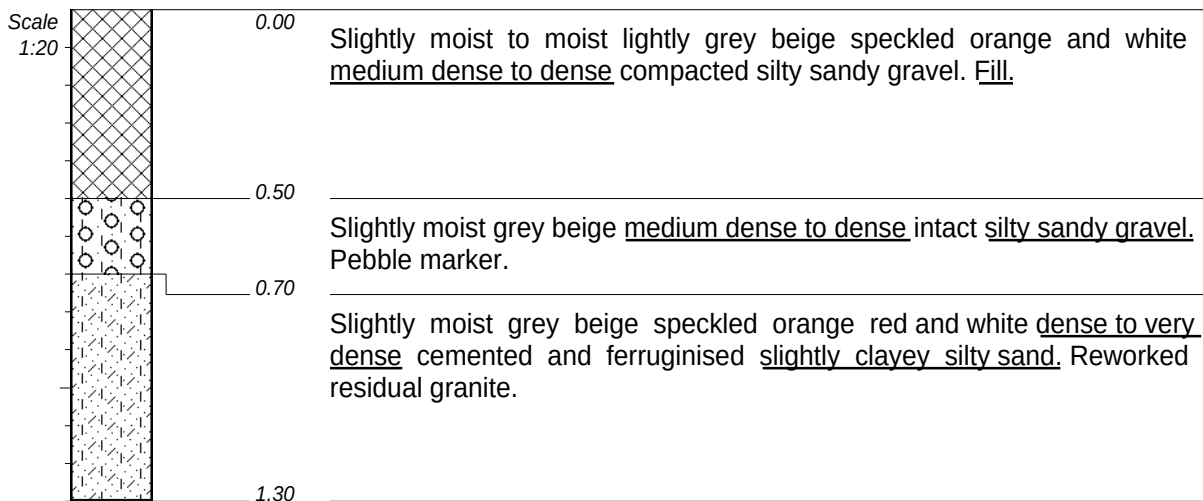

NOTES


- 1) Refusal at 1,3m on very soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP02

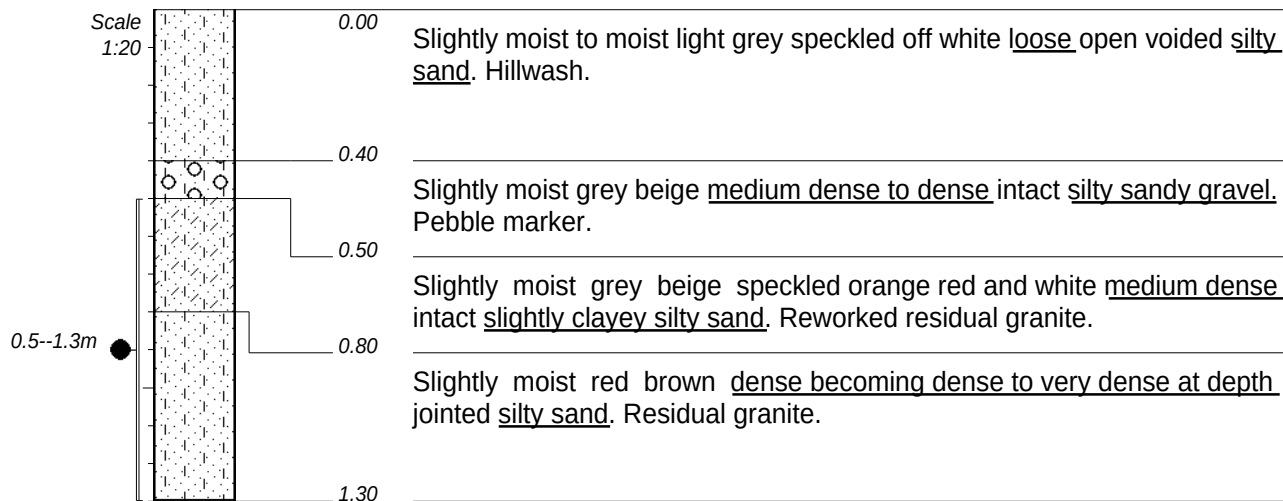

NOTES

- 1) Refusal at 1,3m on very dense to very soft rock granite.
- 2) No evidence of water.
- 3) Disturbed sample taken at 0,5--1,3m.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP03

Scale
1:20



0.00

Slightly moist to moist light grey beige speckled orange and white medium dense moderately compacted slightly clayey silty gravelly sand with scattered cobbles. Fill.

0.87

Slightly moist red brown dense becoming dense to very dense at depth cemented, ferruginised and jointed silty sand. Residual granite.

1.10

Slightly moist red brown blotched black very dense to very soft rock strongly cemented and ferruginised gravel. Hardpan ferricrete.

1.30

NOTES

- 1) Refusal at 1,3m on soft rock hardpan ferricrete.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP04

Scale
1:20



0.00

Slightly moist to moist lightly grey speckled off white medium dense open voided gravelly silty sand. Hillwash.

0.40

Slightly moist grey beige dense to very dense intact silty sandy gravel. Pebble marker.

0.70

Slightly moist red brown blotched black very dense to very soft rock strongly cemented and ferruginised gravel. Hardpan ferricrete.

0.90

NOTES


- 1) Refusal at 0,9m on soft rock hardpan ferricrete.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP05

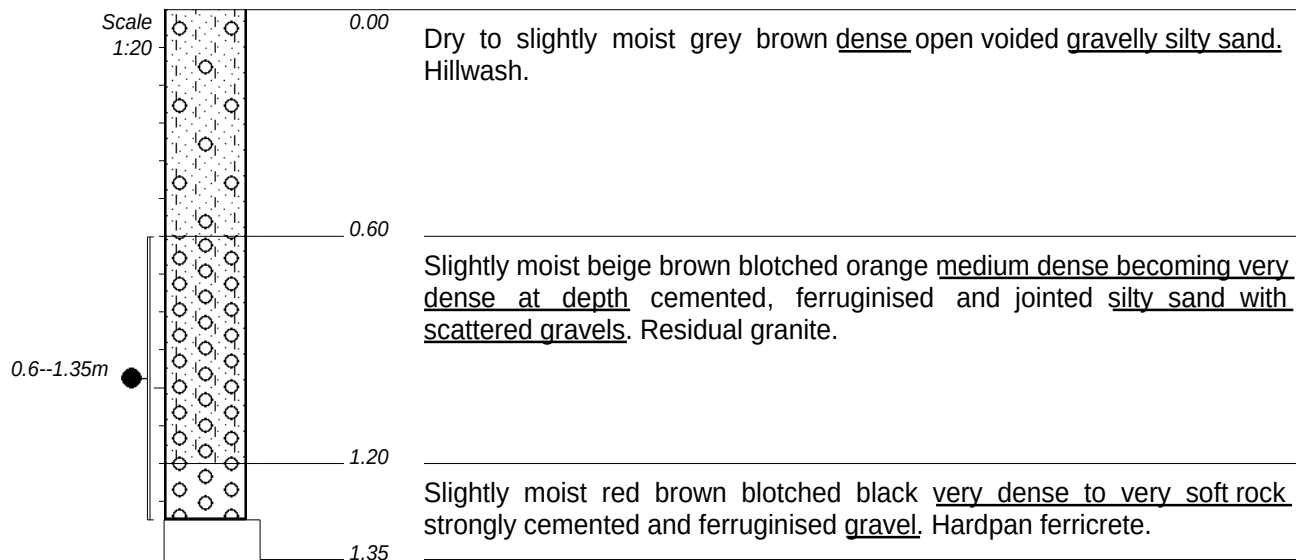

NOTES

- 1) Refusal at 1,35m on soft rock hardpan ferricrete.
- 2) No evidence of water.
- 3) Disturbed sample taken at 0,6--1,35m.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP06

Scale
1:20



0.00

Dry beige brown loose pinholed silty sand. Hillwash.

0.95

Slightly moist beige brown speckled off white medium dense intact silty sand with abundant coarse gravels and cobbles. Pebble marker.

1.05

Slightly moist red brown blotched black very dense to very soft rock strongly cemented and ferruginised gravel. Hardpan ferricrete.

1.25

NOTES

- 1) Refusal at 1,25m in soft rock hardpan ferricrete.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP07

Scale
1:20



0.00

Dry beige brown dense pinholed silty sand. Hillwash.

0.80

Slightly moist beige brown speckled off white dense intact silty sand with abundant coarse gravels and cobbles. Pebble marker.

1.05

Slightly moist beige brown blotched orange dense becoming very dense at depth cemented ferruginised and jointed silty sand with scattered gravels. Residual granite.

1.35

NOTES


- 1) Refusal at 1,35m on very dense residual granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP08

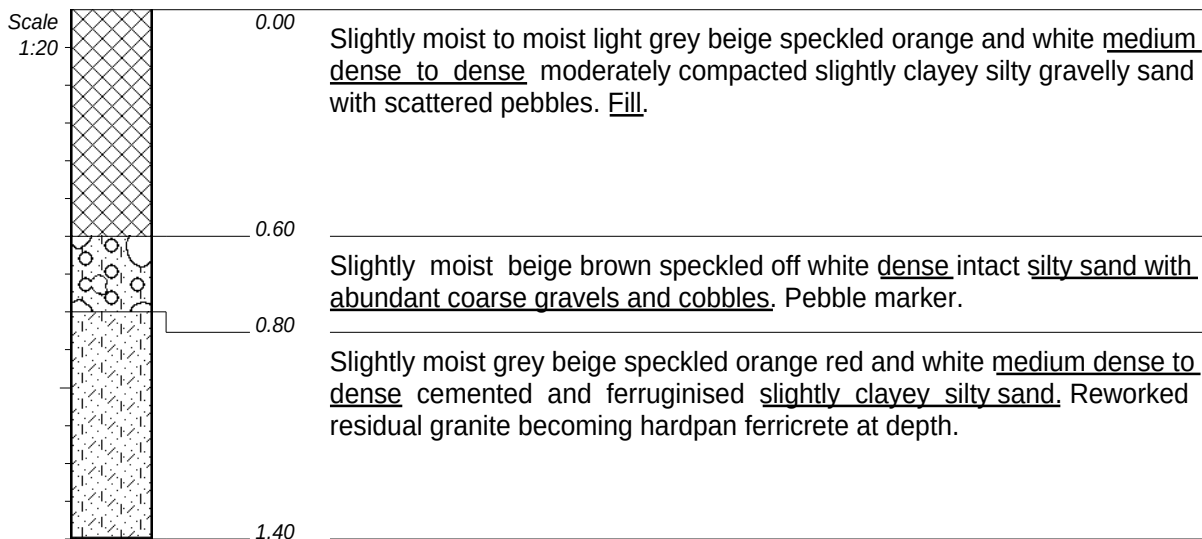

NOTES

- 1) Refusal at 1,4m on hardpan ferricrete.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP09

Scale
1:20



0.00

Slightly moist to moist grey brown dense compacted silty sand with scattered gravels. Fill.

0.50

Slightly moist dark grey brown medium dense pinholed silty sand. Hillwash.

0.90

Slightly moist beige brown speckled off white dense intact silty sand with abundant coarse gravels and cobbles. Pebble marker.

1.10

Slightly moist beige brown blotched orange dense becoming very dense at depth cemented, ferruginised and jointed silty sand with scattered gravels. Residual granite.

1.40

NOTES


- 1) Refusal at 1,4m on very dense residual granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP10

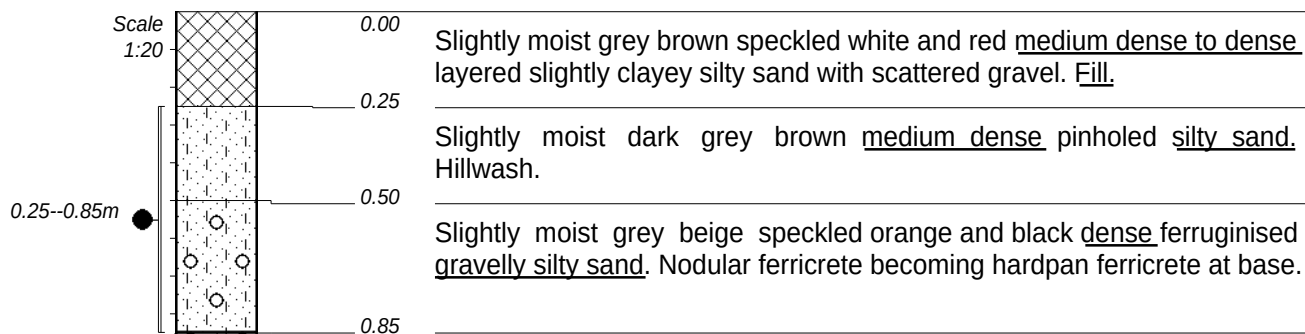

NOTES


- 1) Refusal at 0,85m on very soft rock hardpan ferricrete.
- 2) No evidence of water.
- 3) Disturbed sample taken at 0,25--0,85m.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP11

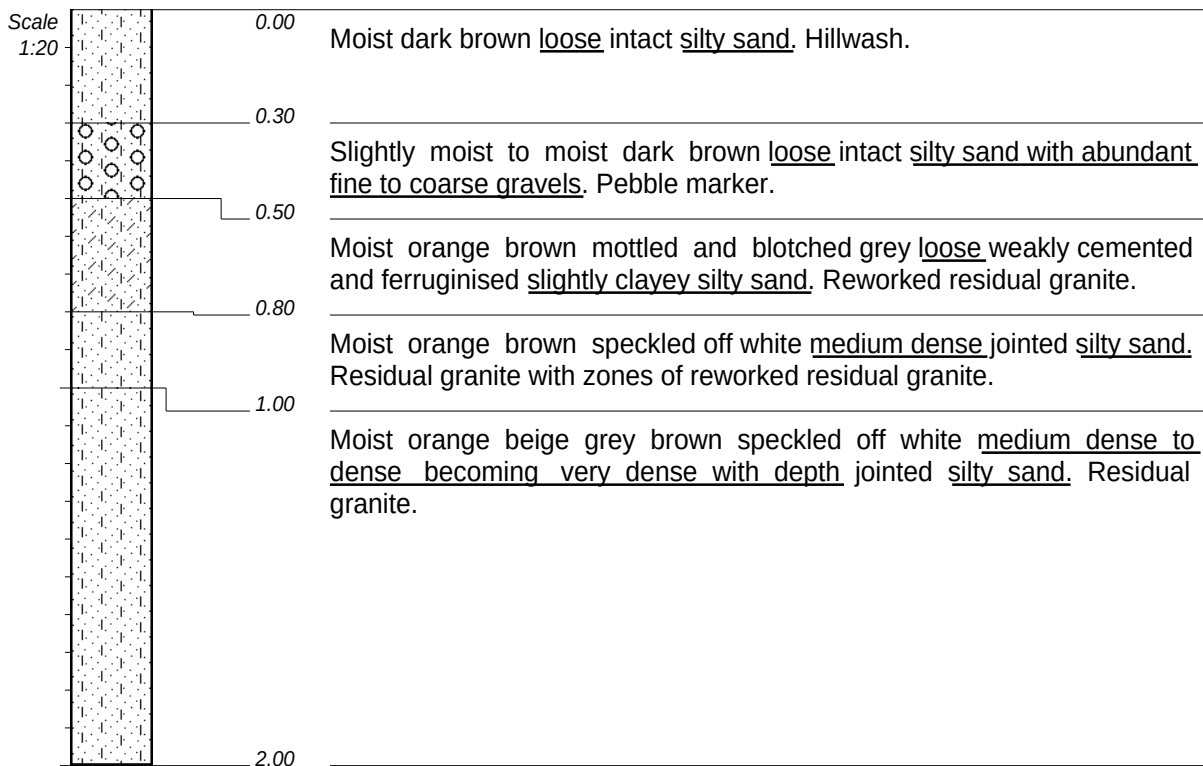

NOTES

- 1) Refusal at 2,0m on very soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP12

Scale
1:20



0.00

Slightly moist to moist grey mottled and blotched orange brown loose intact silty sand with abundant gravels. Pebble marker.

0.20

Moist orange brown mottled and blotched black and grey dense strongly cemented and ferruginised silty sand. Reworked residual granite.

1.20

NOTES


- 1) Refusal at 1,2m on very dense reworked residual granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP13

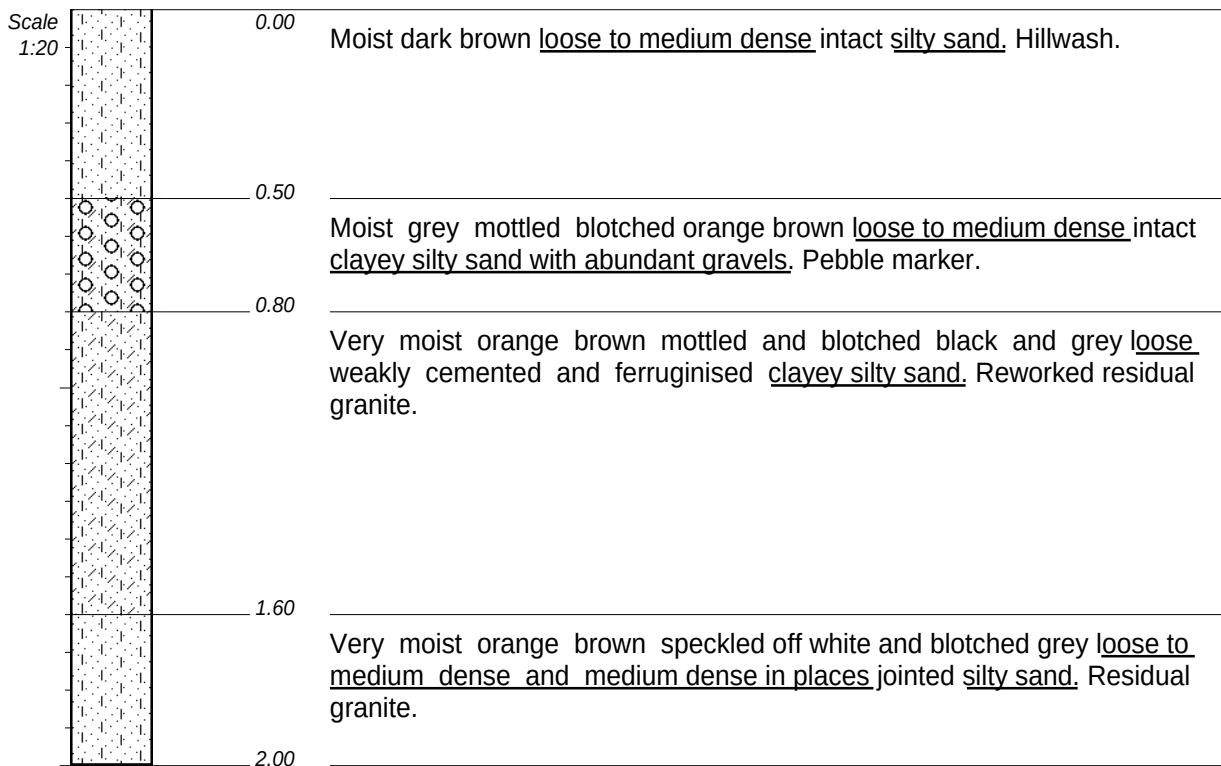

NOTES

- 1) No refusal at 2,0m however DCP indicated refusal at 2,6m.
- 2) Slight seepage at 1,6m.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP14

Scale
1:20



0.00

Moist dark brown loose to medium dense intact silty sand. Hillwash.

0.30

Moist grey mottled blotched orange brown loose to medium dense intact clayey silty sand with abundant gravels. Pebble marker.

0.50

Moist orange brown mottled and blotched black and grey loose to medium dense weakly cemented and ferruginised clayey silty sand. Reworked residual granite.

0.70

Moist orange brown speckled off white and blotched grey loose to medium dense and medium dense in places jointed silty sand. Residual granite.

1.10

Moist orange brown speckled off white and blotched grey medium dense becoming very dense with depth jointed silty sand. Residual granite.

2.20

NOTES

- 1) Refusal at 2,2m on very dense to very soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP15

Scale
1:20



0.00

Moist dark brown loose to medium dense intact silty sand. Hillwash.

0.30

Moist grey mottled and blotched orange brown loose to medium dense intact clayey silty sand with abundant gravels. Pebble marker.

0.40

Moist to very moist orange brown mottled and blotched black and grey loose to medium dense weakly cemented and ferruginised slightly clayey silty sand. Reworked residual granite.

0.80

Moist orange brown speckled off white and blotched grey medium dense becoming very dense with depth jointed silty sand. Residual granite.

2.10

NOTES

- 1) Refusal at 2,1m on very dense to very soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP16

Scale
1:20



0.00

Moist dark brown loose to medium dense intact silty sand. Hillwash.

0.20

Moist grey mottled and blotched orange brown loose to medium dense intact clayey silty sand with abundant gravels. Pebble marker.

0.60

Moist orange brown mottled and blotched black and grey medium dense weakly cemented and ferruginised slightly clayey silty sand. Reworked residual granite.

1.60

Moist to very moist orange brown speckled off white and blotched grey medium dense and loose to medium dense in places jointed silty sand. Residual granite.

2.10

NOTES

- 1) No refusal at 2,1m. No refusal of DCP at 3,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP17

Scale
1:20



0.00

Moist dark brown loose to medium dense intact silty sand. Hillwash.

0.20

Moist grey mottled and blotched orange brown loose to medium dense intact clayey silty sand with abundant gravels. Pebble marker.

0.40

Moist to very moist orange brown speckled off white and blotched grey dense cemented and ferruginised silty sand. Residual granite.

0.60

NOTES


- 1) Refusal at 0,6m on soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP18

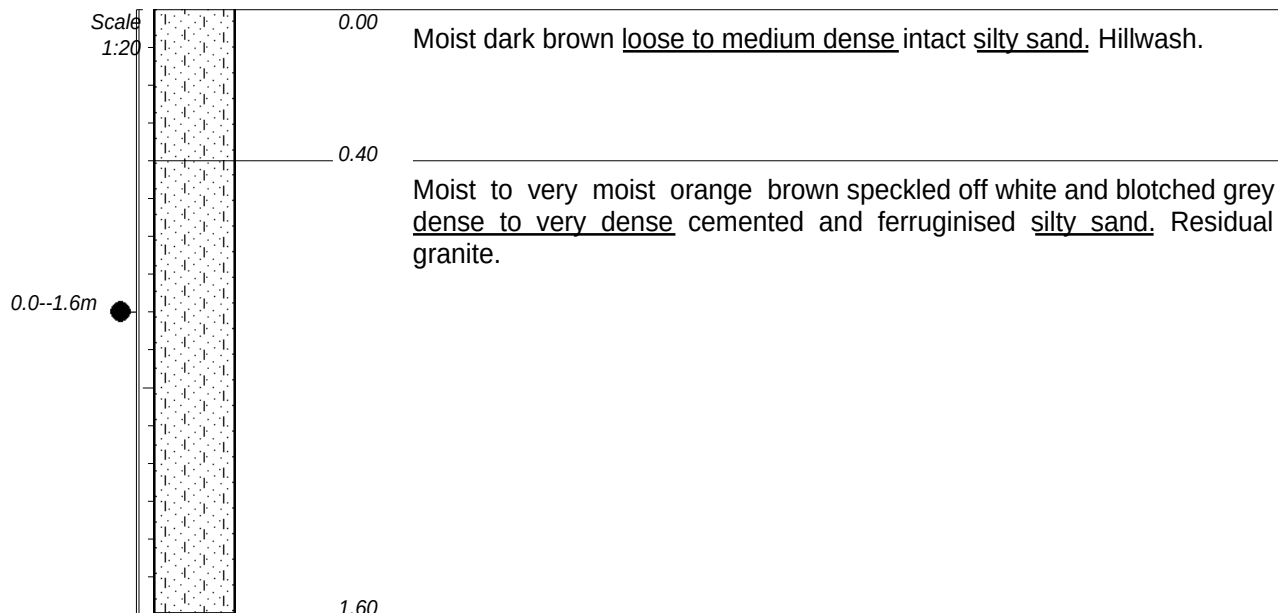

NOTES

- 1) Refusal at 1,6m on very soft rock granite.
- 2) Moderate seepage at 1,6m.
- 3) Disturbed sample taken at 0,0--1,6m.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP19

Scale
1:20



0.00

Slightly moist grey brown speckled off white loose to medium dense uncontrolled slightly clayey silty sand with scattered gravels. Fill.

0.40

Moist to very moist orange brown speckled off white and blotched grey dense to very dense cemented and ferruginised silty sand. Residual granite.

1.00

NOTES

- 1) Refusal at 1,0m on very soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP20

Scale
1:20



0.00

Slightly moist grey brown speckled off white loose to medium dense uncontrolled slightly clayey silty sand with scattered gravels. Fill.

0.40

Moist to very moist orange brown speckled off white and blotched grey dense to very dense cemented and ferruginised silty sand. Residual granite.

1.00

NOTES

- 1) Refusal at 10m on very soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP21

Scale
1:20



0.00

Slightly moist grey brown speckled off white loose to medium dense uncontrolled slightly clayey silty sand with scattered gravels. Fill.

0.40

Moist to very moist orange brown speckled off white and blotched grey dense to very dense cemented and ferruginised silty sand. Residual granite.

1.00

NOTES

- 1) Refusal at 1,0m on very soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP22

Scale
1:20



0.00

Moist grey beige very dense compacted silty sand with abundant pebbles. Fill.

0.60

Moist grey brown speckled red and black medium dense layered slightly clayey silty sand. Fill.

1.40

Slightly moist to moist beige grey brown speckled off white and red very dense intact silty sand. Residual granite.

1.60

NOTES


- 1) Refusal at 1,6m on very dense to very soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP23

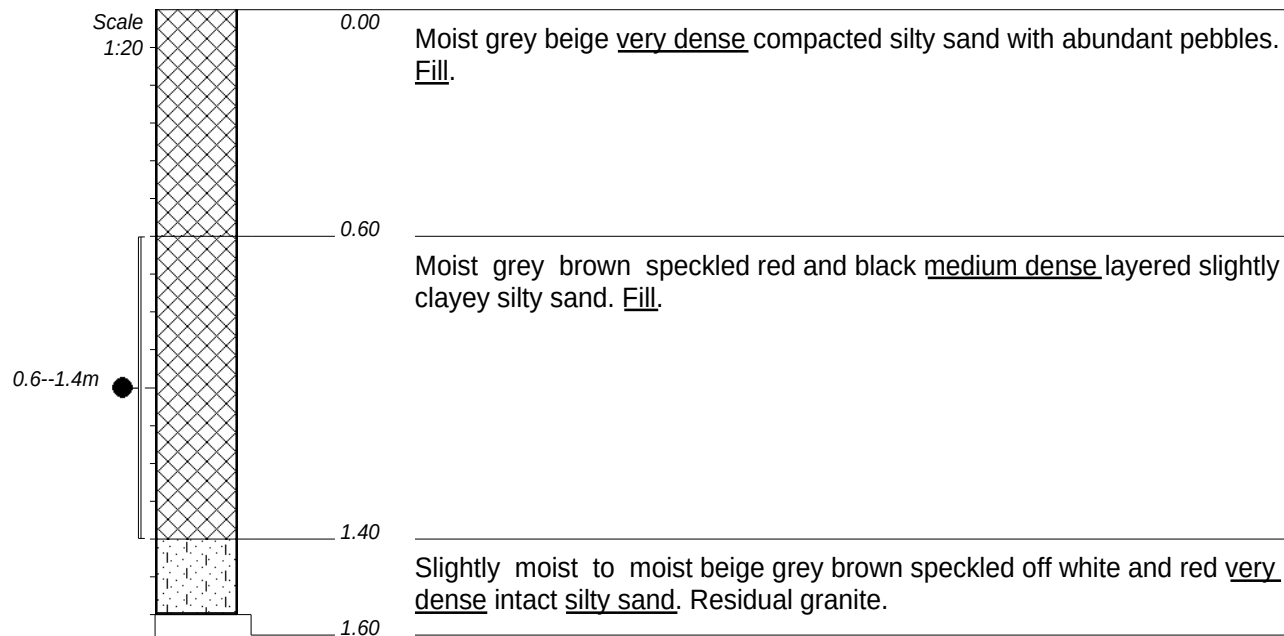

NOTES


- 1) Refusal at 1,6m on very dense to very soft rock granite.
- 2) No evidence of water.
- 3) Disturbed sample taken at 0,6--1,4m.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP24

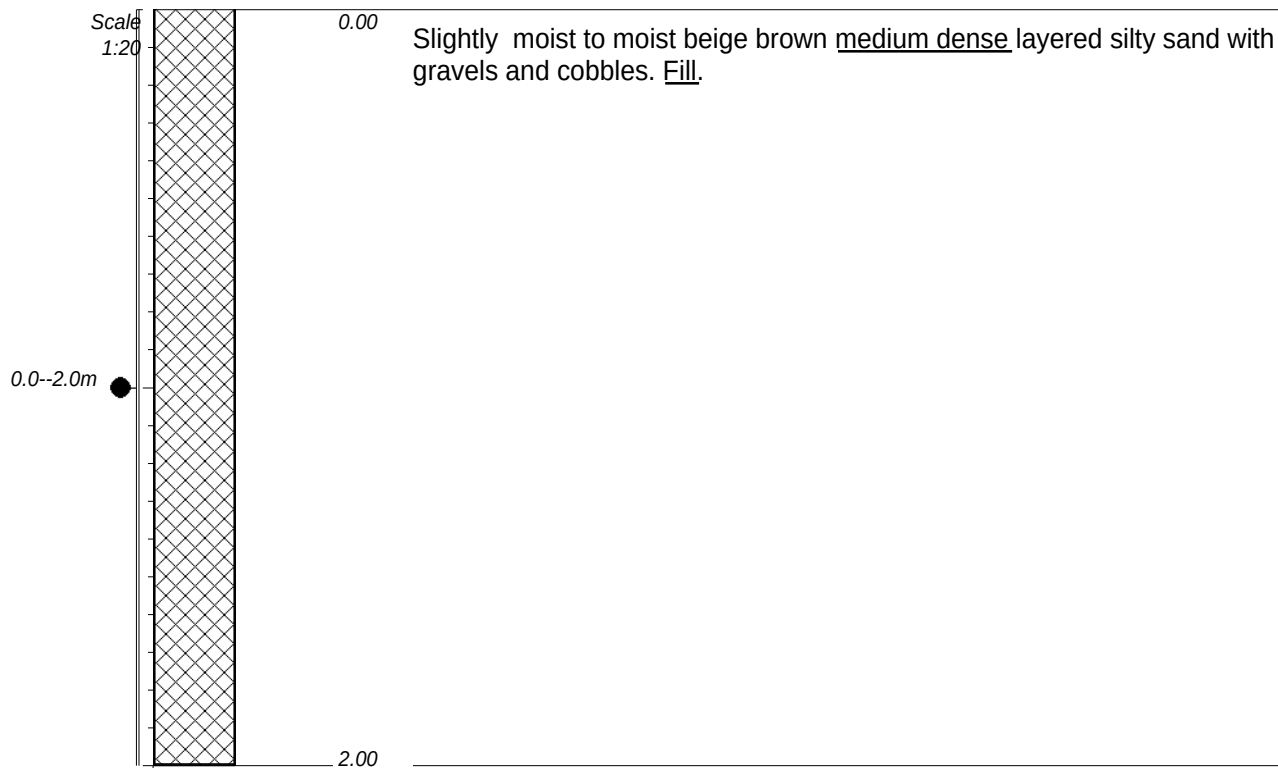

NOTES

- 1) No refusal at 2,0m. DCP refusal at 2,5m.
- 2) No evidence of water.
- 3) Disturbed sample taken at 0,0--2,0m.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP25

Scale
1:20



0.00

Slightly moist to moist beige brown medium dense layered silty sand with gravels and cobbles. Fill.

2.00

NOTES

- 1) No refusal at 2,0m. DCP refusal at 2,5m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP26

Scale
1:20



0.00

Slightly moist to moist beige brown medium dense layered silty sand with gravels and cobbles. Fill.

2.00

NOTES


- 1) No refusal at 2,0m. DCP refusal at 2,5m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP27

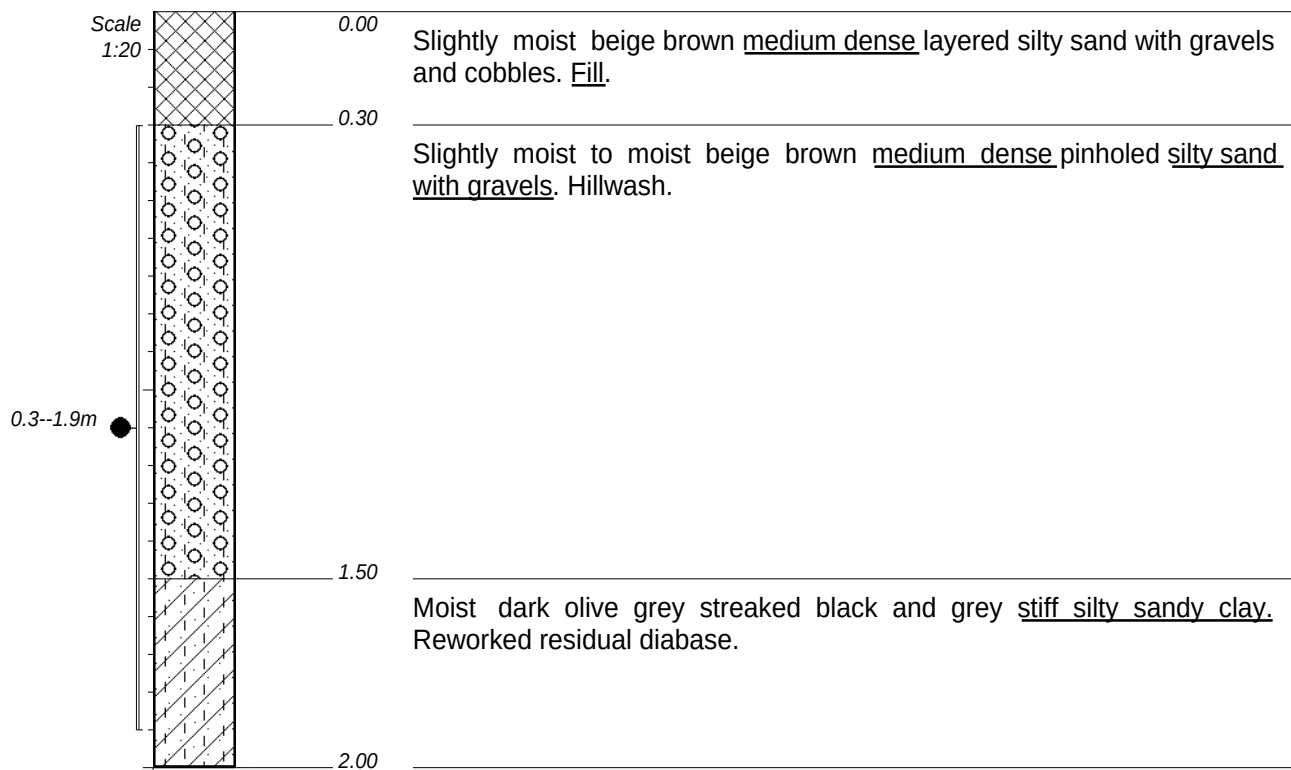

NOTES


- 1) No refusal at 2,0m. No DCP refusal at 3,0m.
- 2) No evidence of water.
- 3) Disturbed sample taken at 0,3--1,9m.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP28

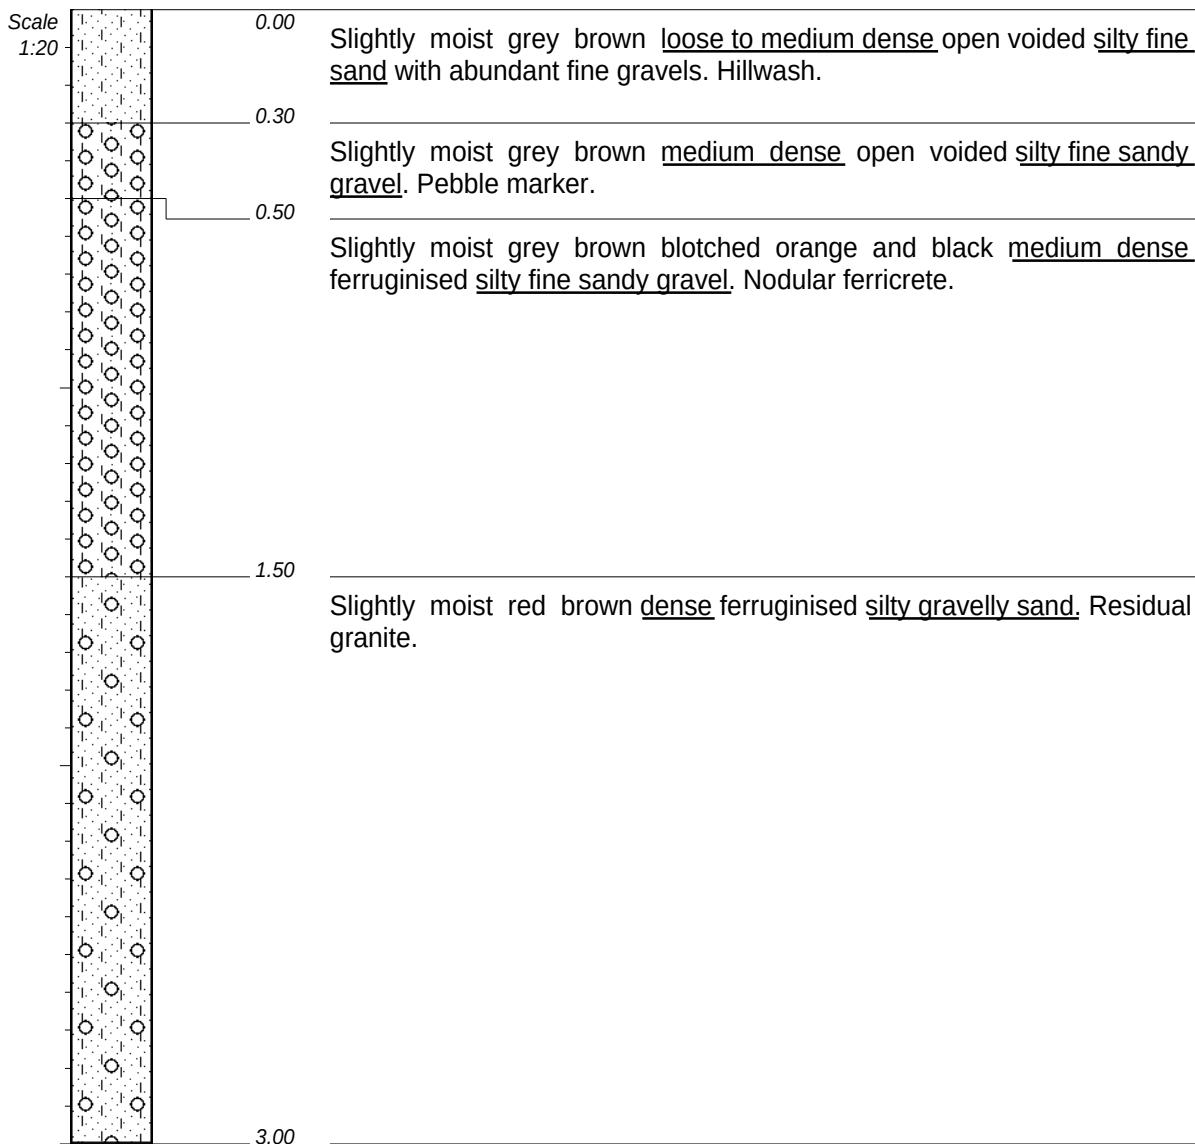

NOTES


- 1) No refusal at 3,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP32

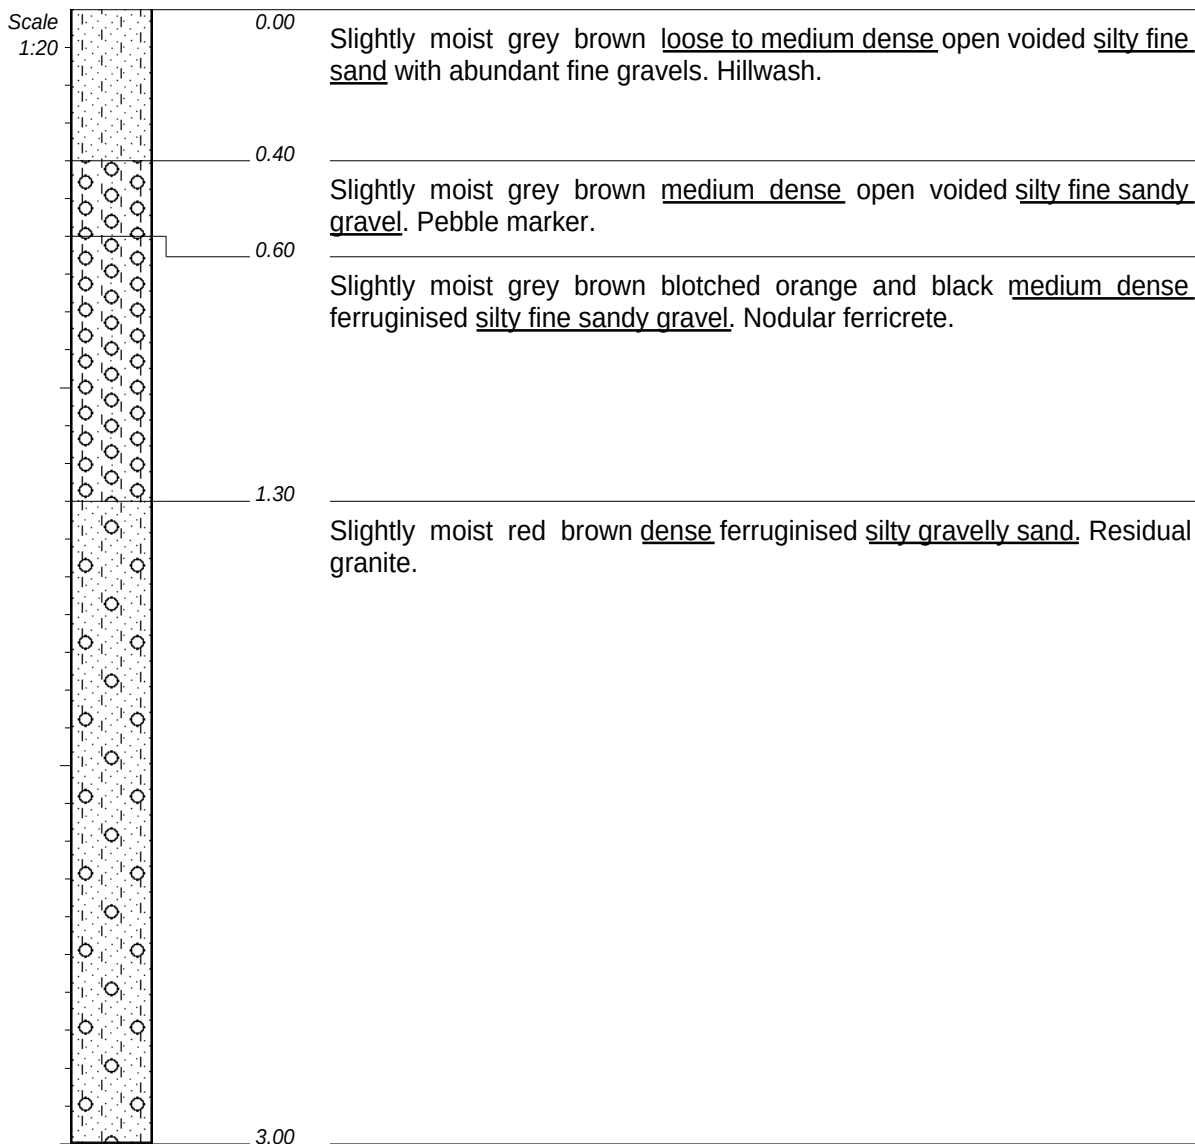

NOTES


- 1) No refusal at 3,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP33

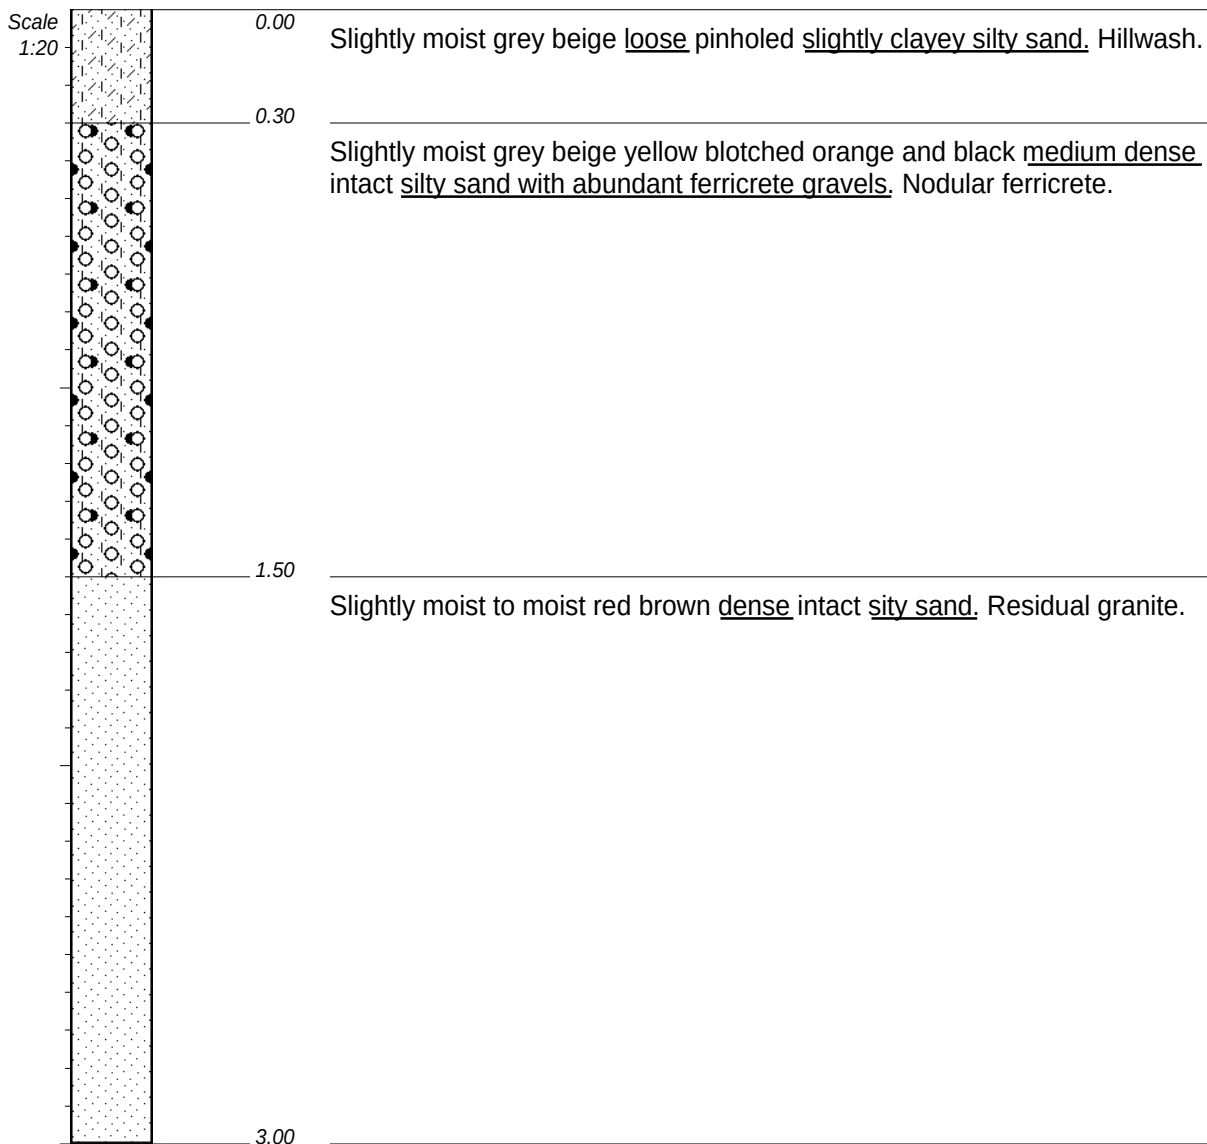

NOTES

- 1) No refusal at 3,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP34



Zutari Consulting Engineers
Halfway House Water Upgrade

HOLE No: TP35
Sheet 1 of 1

JOB NUMBER: 20/91/TP

Scale
1:20

0.00
0.01

Hard rock granite.

NOTES


- 1) Test pit not excavated due to granite bedrock at surface.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP35

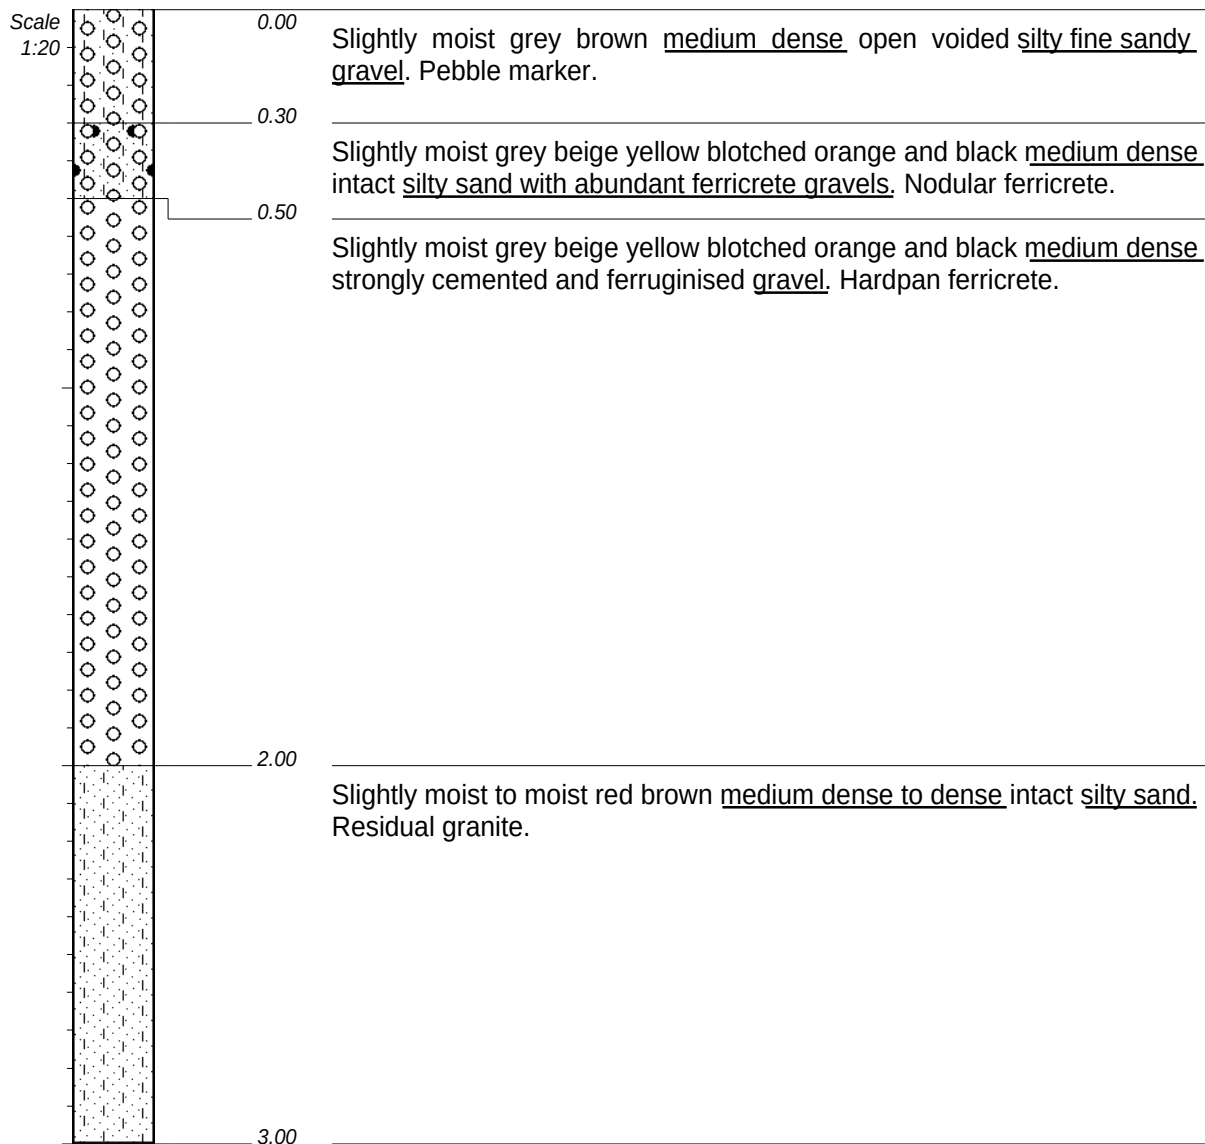

NOTES

- 1) No refusal at 3,0m.
- 2) Slight seepage at 2,0m.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP36

Scale
1:20



0.00

Dry grey mottled black dense to very dense layered silty gravelly sand.
Fill with builders rubble.

0.50

Dry to slightly moist orange brown mottled grey dense becoming very dense nodular to strongly cemented silty gravelly sand. Nodular ferricrete becoming hardpan ferricrete.

1.00

NOTES

- 1) Refusal at 1,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP37

Scale
1:20



0.00

Dry to slightly moist grey brown mottled black medium dense to dense layered silty gravelly sand. Fill with builders rubble.

0.70

Slightly moist orange brown mottled black medium dense weakly cemented and ferruginised silty gravelly sand. Nodular ferricrete.

1.10

Slightly moist orange brown intact silty sand. Reworked residual granite.

1.60

NOTES

- 1) No refusal.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP38

Scale
1:20



0.00

Dry to slightly moist grey brown mottled black medium dense to dense
silty gravelly sand with builders rubble. Fill.

0.60

Dry to slightly moist grey brown mottled black cemented and ferruginised
silty gravelly sand. Nodular ferricrete becoming hardpan ferricrete.

1.50

NOTES

- 1) Refusal at 1,5m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP39

Scale
1:20



0.00

Slightly moist red to orange brown medium dense becoming loose
layered silty gravelly sand. Fill.

0.80

Slightly moist yellow to orange brown mottled black medium dense
becoming dense weakly cemented and ferruginised silty gravelly sand.
Nodular ferricrete.

1.50

NOTES


- 1) No Refusal.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP40

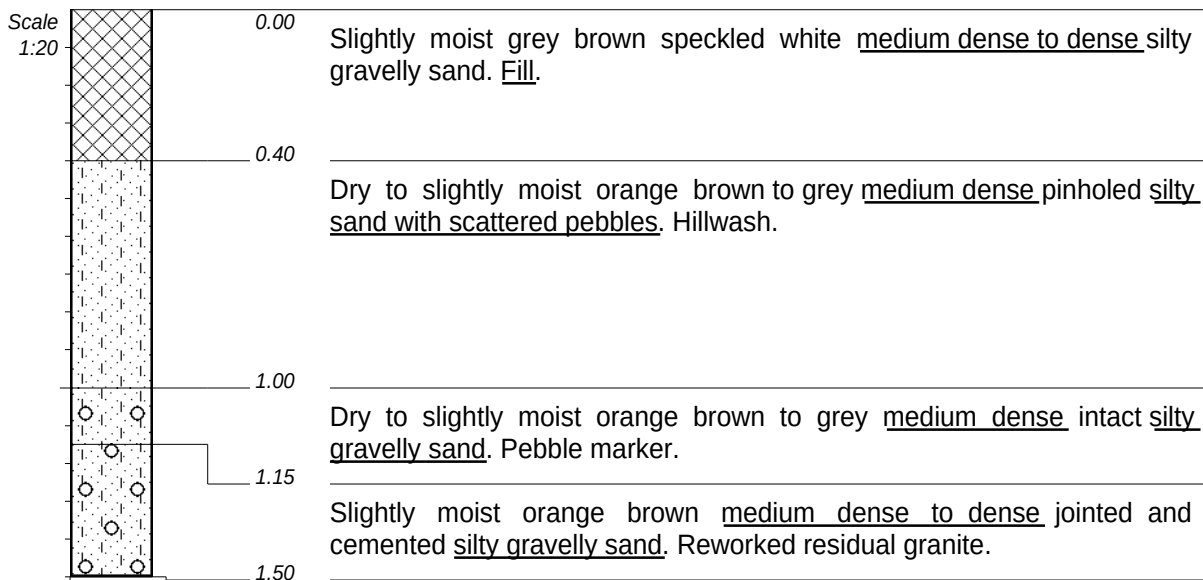

NOTES


- 1) No Refusal.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP44

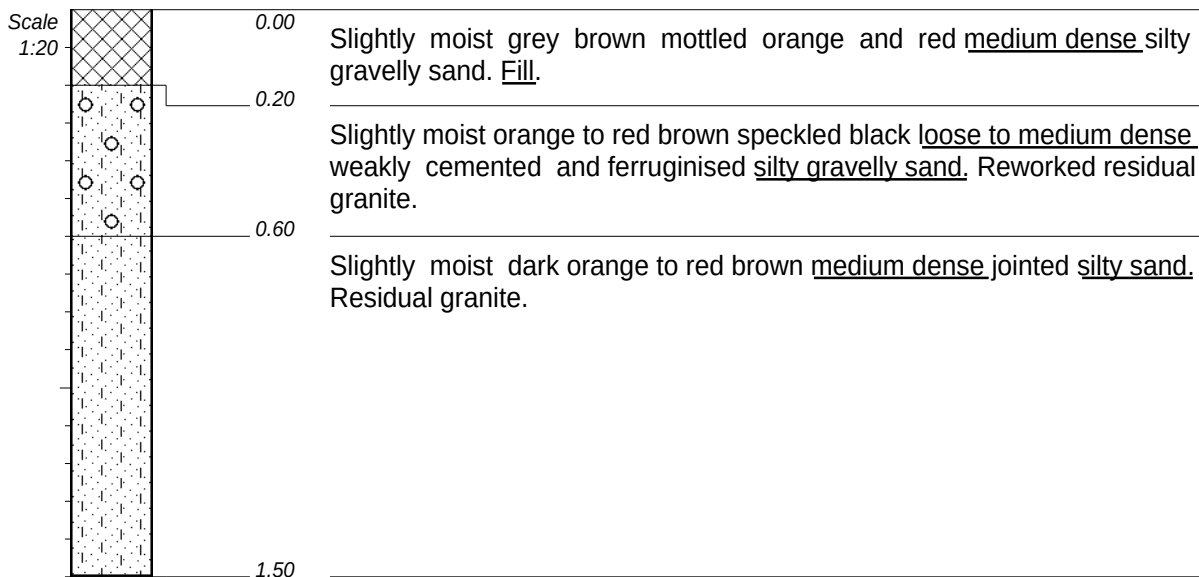

NOTES

- 1) Refusal at 1,5m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP45

Scale
1:20



0.00

Moist red brown speckled white and black medium dense slightly clayey silty sand with scattered gravels and cobbles. Fill.

2.00

NOTES

- 1) No refusal at 2,0m. No DCP refusal at 3,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP46

Scale
1:20



0.00

Moist red brown speckled white and black medium dense slightly clayey silty sand with scattered gravels and cobbles. Fill.

2.00

NOTES

- 1) No refusal at 2,0m. No DCP refusal at 3,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP47

Scale
1:20



0.00

Moist red brown speckled white and black medium dense slightly clayey silty sand with scattered gravels and cobbles. Fill.

0.40

Moist dark grey brown loose to medium dense silty sand. Fill.

0.80

Soft rock granite.

0.80

NOTES

- 1) Refusal at 0,8m on soft rock granite.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP48

Scale
1:20



0.00

Moist red brown speckled white and black dense slightly clayey silty sand with scattered gravels and cobbles. Fill.

0.60

Moist dark grey brown loose to medium dense silty sand. Fill.

1.50

Moist orange to red brown mottled black dense to very dense strongly cemented and ferruginised silty sandy gravel. Hardpan ferricrete.

1.60

NOTES

- 1) Refusal at 1,6m on very soft rock hardpan ferricrete.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP49

Scale
1:20



0.00

Moist red brown speckled white and black dense slightly clayey silty sand with scattered gravels and cobbles. Fill.

1.00

Moist orange to red brown mottled black dense to very dense strongly cemented and ferruginised silty sandy gravel. Hardpan ferricrete.

1.10

NOTES

- 1) Refusal at 1,1m on very soft rock hardpan ferricrete.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP50

Scale
1:20



0.00

Moist red brown speckled white and black dense slightly clayey silty sand with scattered gravels. Fill.

0.85

Moist dark grye brown loose to medium dense silty sand. Fill.

1.20

Moist dark grey beige mottled red orange and black loose to medium dense nodular gravel within a silty sand matrix. Nodular ferricrete.

1.50

NOTES

- 1) No refusal at 1,5m. DCP refusal at 2,0m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP51

Scale
1:20



0.00

Slightly moist grey brown loose becoming medium dense slightly cemented silty gravelly sand. Nodular ferricrete.

0.90

Slightly moist grey brown mottled red and black dense becoming very dense cemented and ferruginised slightly clayey silty gravelly sand. Reworked residual granite.

1.50

NOTES

- 1) Refusal at 1,5m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP52

Scale
1:20



0.00

Slightly moist orange brown loose silty sand. Fill.

0.20

Slightly moist grey brown loose becoming medium dense slightly cemented silty gravelly sand. Nodular ferricrete.

0.70

Slightly moist grey brown mottled red and black dense becoming very dense cemented and ferruginised slightly clayey silty gravelly sand. Reworked residual granite.

1.40

NOTES

- 1) Refusal at 1,4m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP53

Scale
1:20



0.00

Slightly moist yellow brown loose pinholed silty sand. Hillwash.

0.50

Dry yellow to orange brown loose to medium dense weakly cemented and ferruginised slightly clayey silty gravelly sand. Nodular ferricrete.

0.80

Slightly moist orange to red brown mottled black dense to very dense strongly cemented and ferruginised silty sandy gravel. Hardpan ferricrete.

0.90

NOTES


- 1) Refusal at 0,9m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP54

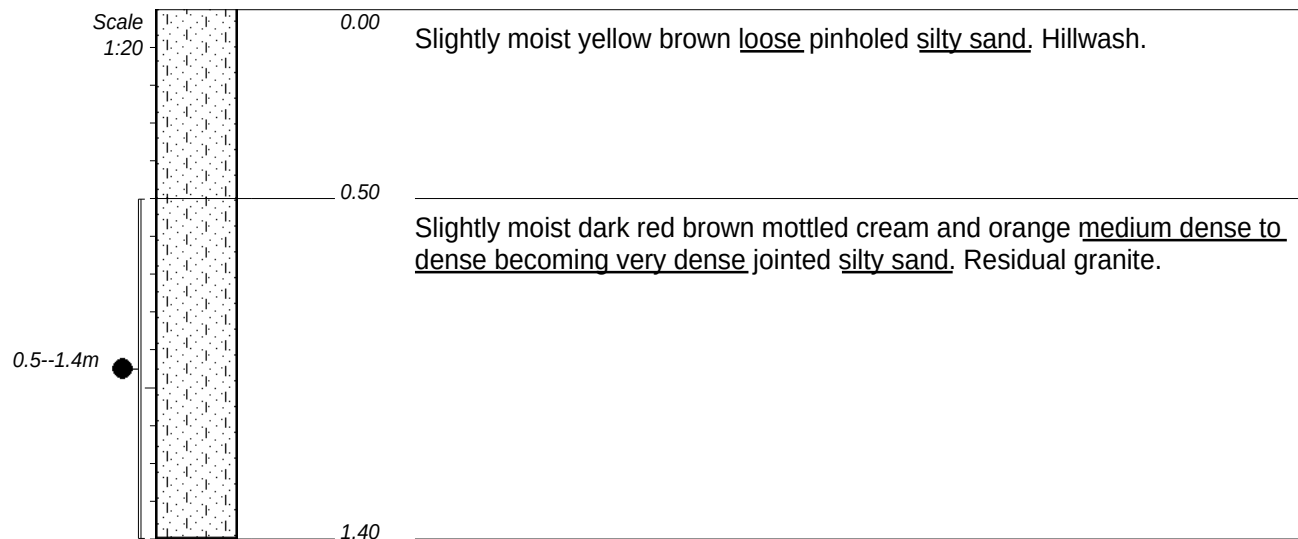

NOTES


- 1) Refusal at 1,4m.
- 2) No evidence of water.
- 3) Disturbed sample taken at 0,5--1,4m.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP55

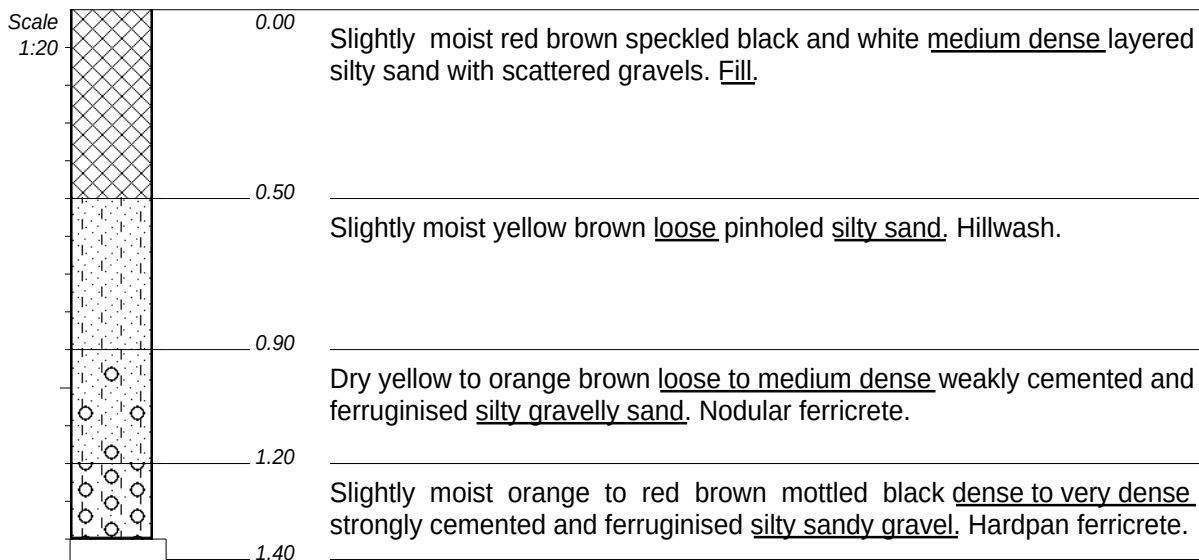

NOTES

- 1) Refusal at 1,4m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP56

Scale
1:20



0.00

Slightly moist orange to red brown and grey medium dense to dense silty gravelly sand. Fill with builders rubble and waste.

1.30

Dry to yellow to orange brown dense to very dense weakly cemented and ferruginised silty gravelly sand. Nodular ferricrete.

1.40

Slightly moist orange to red brown mottled black very dense strongly cemented and ferruginised silty sandy gravel. Hardpan ferricrete.

1.45

NOTES


- 1) Refusal at 1,45m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP57

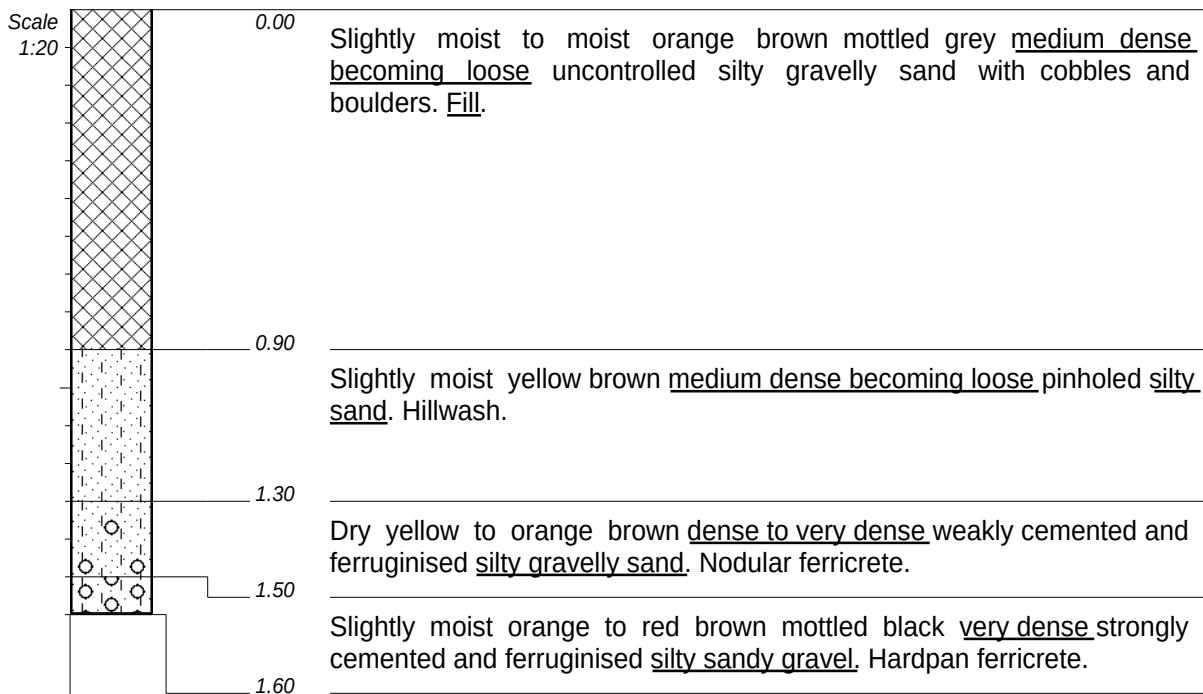

NOTES

- 1) Refusal at 1,6m.
- 2) Seepage at 1,5m.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP58

Scale
1:20



0.00

Slightly moist red loose pinholed silty sand. Hillwash.

1.30

Slightly moist red brown mottled black dense becoming very dense cemented and ferruginised silty sandy gravel. Nodular to hardpan ferricrete.

1.40

NOTES


- 1) Refusal at 1,4m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP59

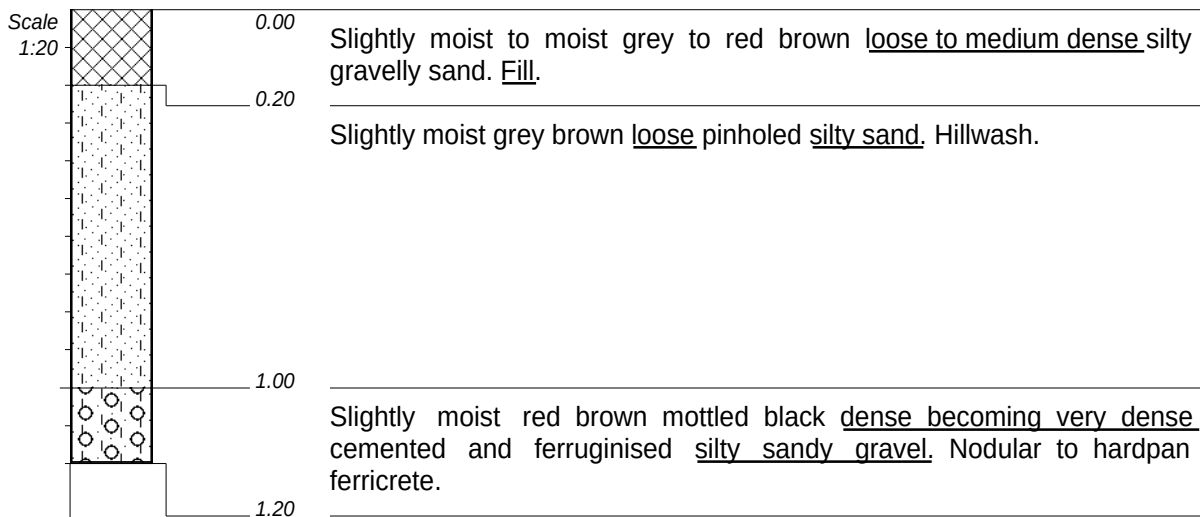

NOTES

- 1) Refusal at 1,2m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP60

Scale
1:20



0.00

Slightly moist red loose pinholed silty sand. Hillwash.

0.50

Slightly moist red brown mottled black dense becoming very dense cemented and ferruginised silty sandy gravel. Nodular to hardpan ferricrete.

0.60

NOTES


- 1) Refusal at 0,6m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP61

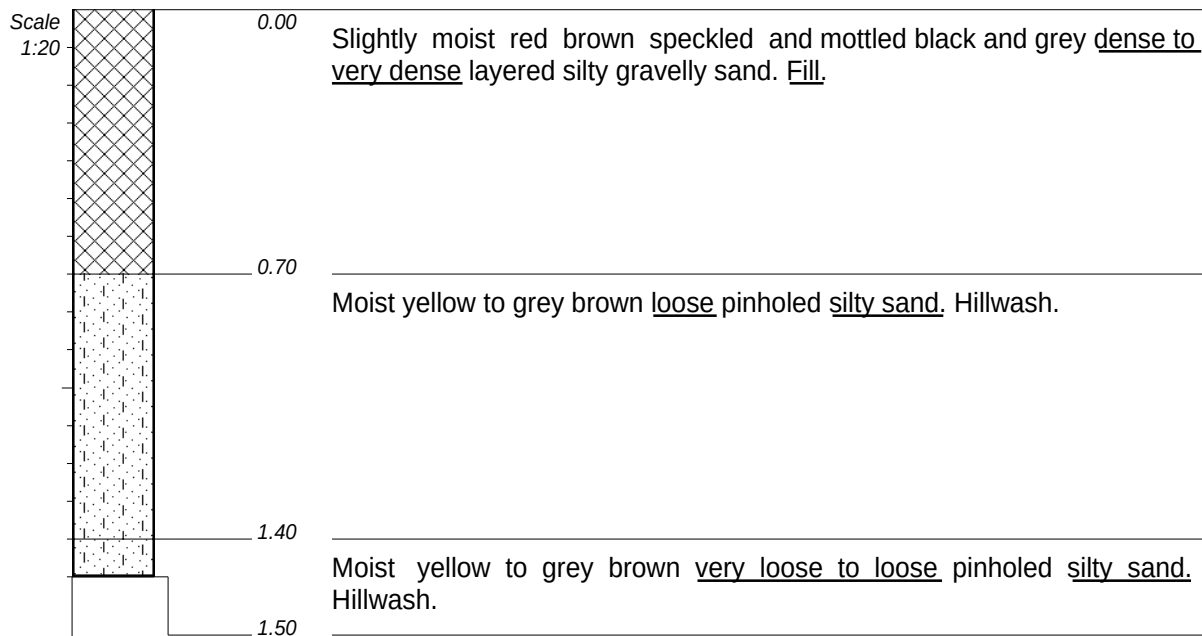

NOTES

- 1) No refusal at 1,5m.
- 2) Seepage at 1,4m.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP62

Scale
1:20



0.00

Dry to slightly moist grey brown dense to very dense silty gravelly sand with cobbles. Fill.

0.50

NOTES


- 1) Refusal at 0,5m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP63

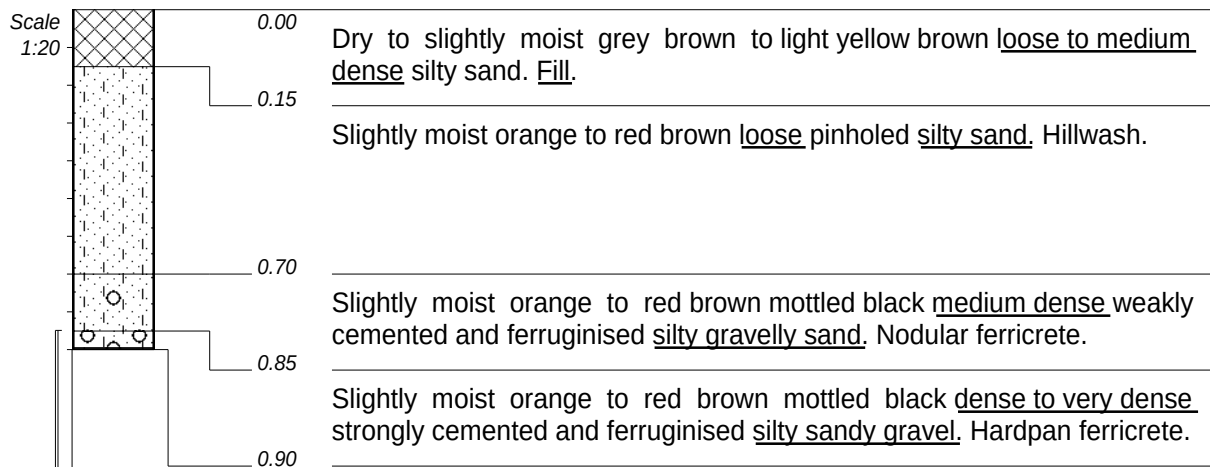

NOTES

- 1) Refusal at 0,9m.
- 2) No evidence of water.
- 3) Disturbed sample taken at 07--0,85m.
- 4) Stable sidewalls.


07--0.85m

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP64

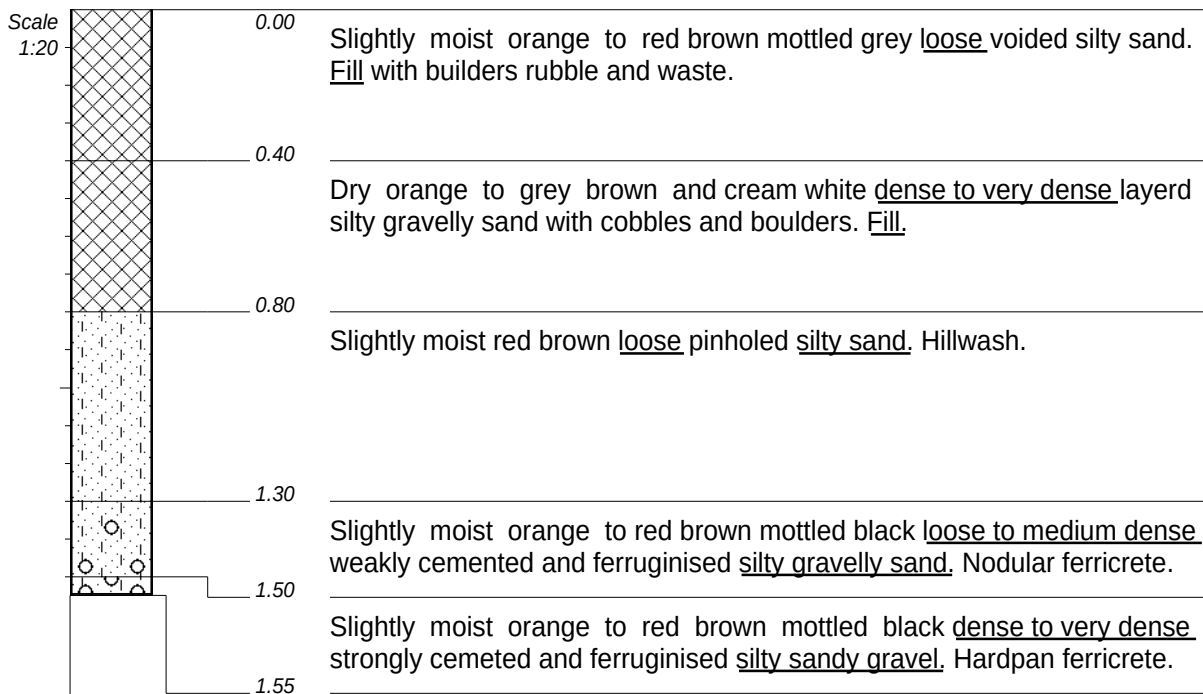

NOTES


- 1) Refusal at 1,55m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP65

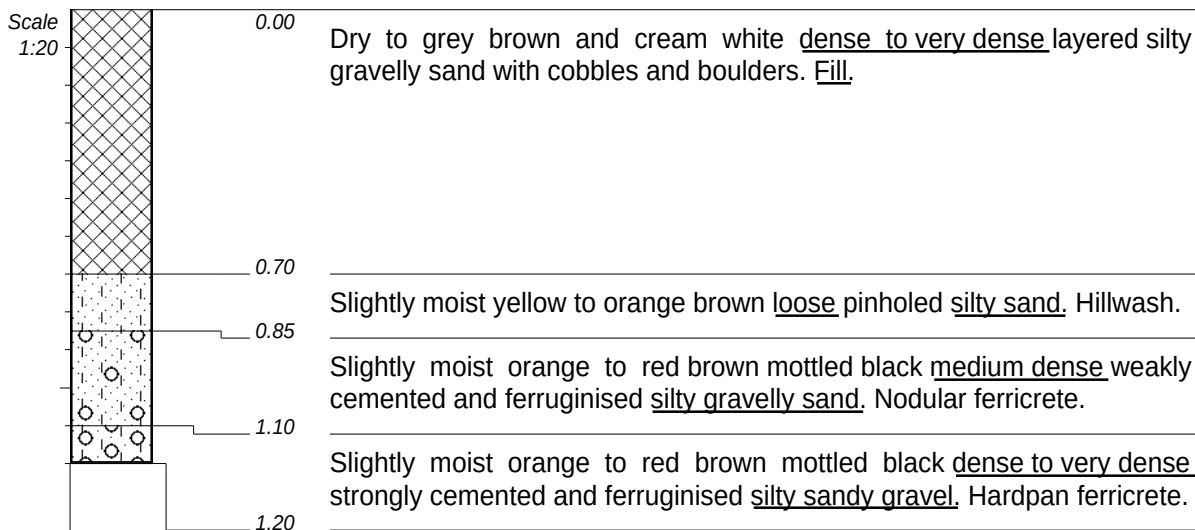

NOTES

- 1) No refusal at 1,2m.
- 2) No evidence of water.
- 3) No sample.
- 4) Stable sidewalls.


CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFIED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP66

Scale
1:20



0.00

Dry orange to grey brown and cream white dense to very dense layered silty gravelly sand with cobbles and boulders. Fill.

1.10

Dry orange to grey brown and cream white loose to medium dense layered silty gravelly sand with cobbles and boulders. Fill.

1.40

Slightly moist grey brown orange and black medium dense to dense intact silty sand. Fill.

1.60

NOTES

- 1) No refusal at 1,6m.
- 2) No evidence of water.
- 3) Disturbed sample taken at 0--1,1m.
- 4) Stable sidewalls.

CONTRACTOR :
MACHINE : Hand Excavated
DRILLED BY :
PROFILED BY : Riaan / Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 10/12/2020
DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: TP67

Name ●

	GRAVEL/gravels	{SA02}
	GRAVELLY	{SA03}
	SAND	{SA04}
	SANDY	{SA05}
	SILTY	{SA07}
	CLAY	{SA08}
	CLAYEY	{SA09}
	GRANITE	{SA17}{SA44}
	FERRICRETE	{SA24}
	FILL	{SA32}
	DISTURBED SAMPLE	{SA38}
	COBBLES	{SA58}

CONTRACTOR :
MACHINE :
DRILLED BY :
PROFIED BY :

TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE :


DATE : 25/01/2021 12:08
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

LEGEND
SUMMARY OF SYMBOLS

APPENDIX C: **BOREHOLE LOGS**

-	-	-	
-	-	-	
-	-	-	
-	-	-	
-	-	-	
-	-	-	
-	-	-	
70	18	>20	
70	16	>20	
100	73	10	
100	84	6	
% Core Rec	% RQD	Fract No./ Metre	SPT 'N60'

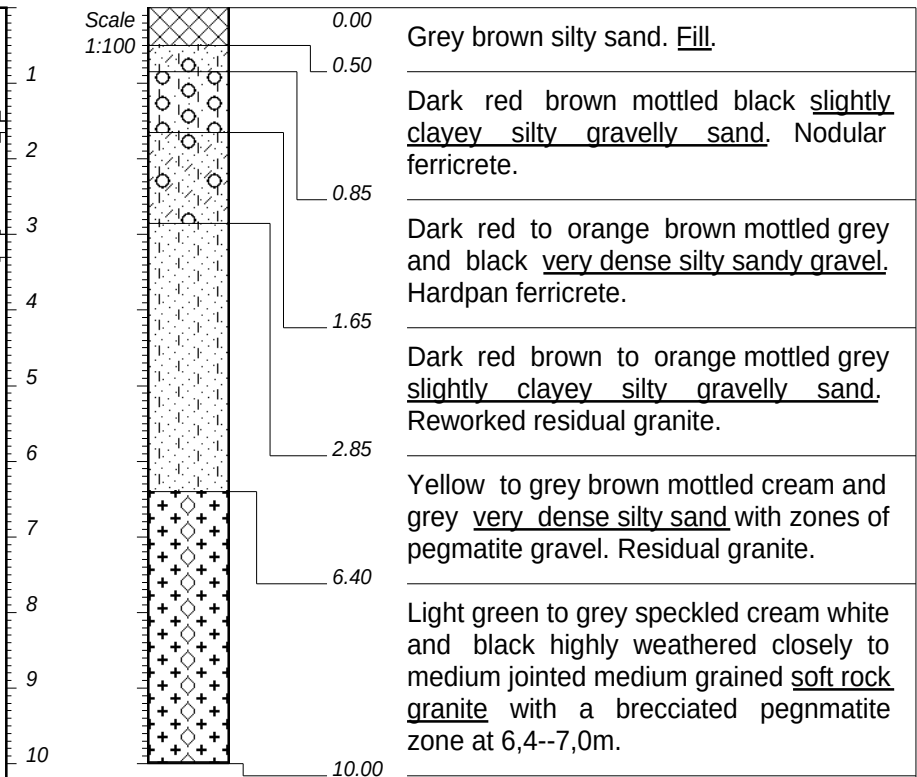

NOTES

- 1) Borehole stopped at 10,0m.
- 2) Rest water level at 5,0m.


CONTRACTOR : RFGS
MACHINE :
DRILLED BY :
PROFIED BY : Warren
TYPE SET BY : Renee
SETUP FILE : STANDAR

```
INCLINATION :  
DIAM :  
DATE :  
DATE : 11/12/2020  
DATE : 11/12/2020 09:53  
TEXT : ..\wayHouseWaterUpgrade.txt
```

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: BH01

-	-	-	14
-	-	-	
-	-	-	
-	-	-	
93	56	13	14
60	0	>20	
100	75	>20	
90	46	>20	
93	50	>20	
% Core Rec	% RQD	Fract No./ Metre	SPT 'N60'

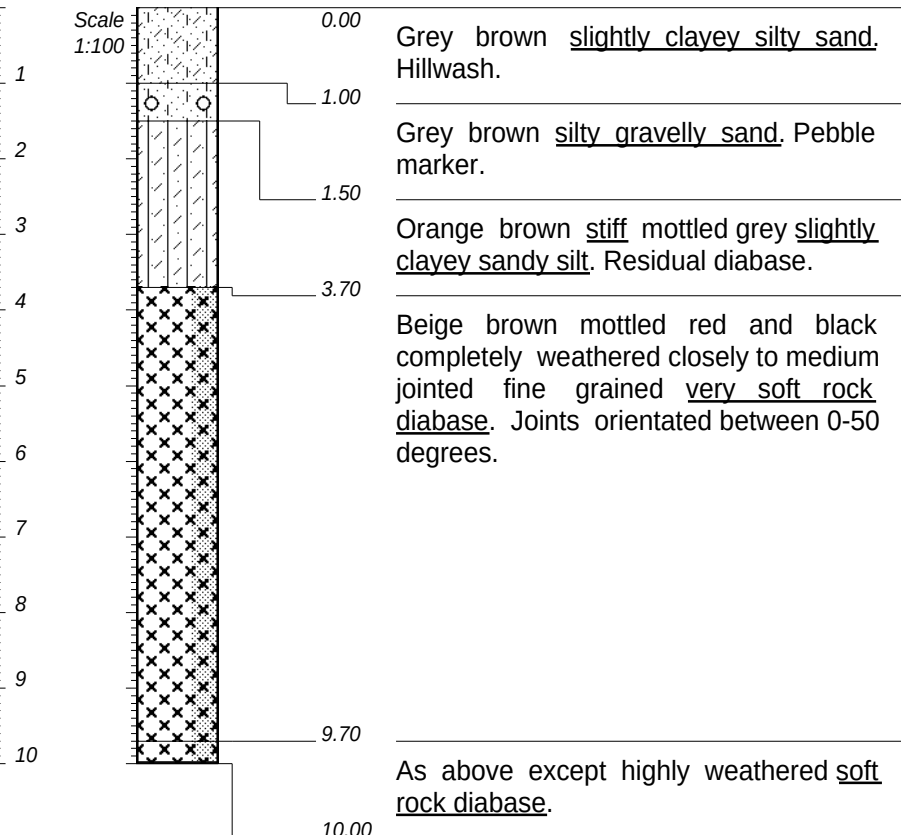

NOTES

- 1) Borehole stopped at 10,0m.
- 2) Rest water level at 4,0m.


CONTRACTOR : RFGS
MACHINE :
DRILLED BY :
PROFILED BY : Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 11/12/2020
DATE : 11/12/2020 09:53
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: BH03

-	-	-	
-	-	-	
-	-	-	
-	-	-	
-	-	-	
-	-	-	
-	-	-	
98	40	12	
13	24	>20	
100	70	11	
80	35	11	
100	26	>20	
100	23	15	
100	33	16	
100	100	9	
67	100	5	
% Core Rec	% RQD	Fract No./ Metre	SPT 'N60'

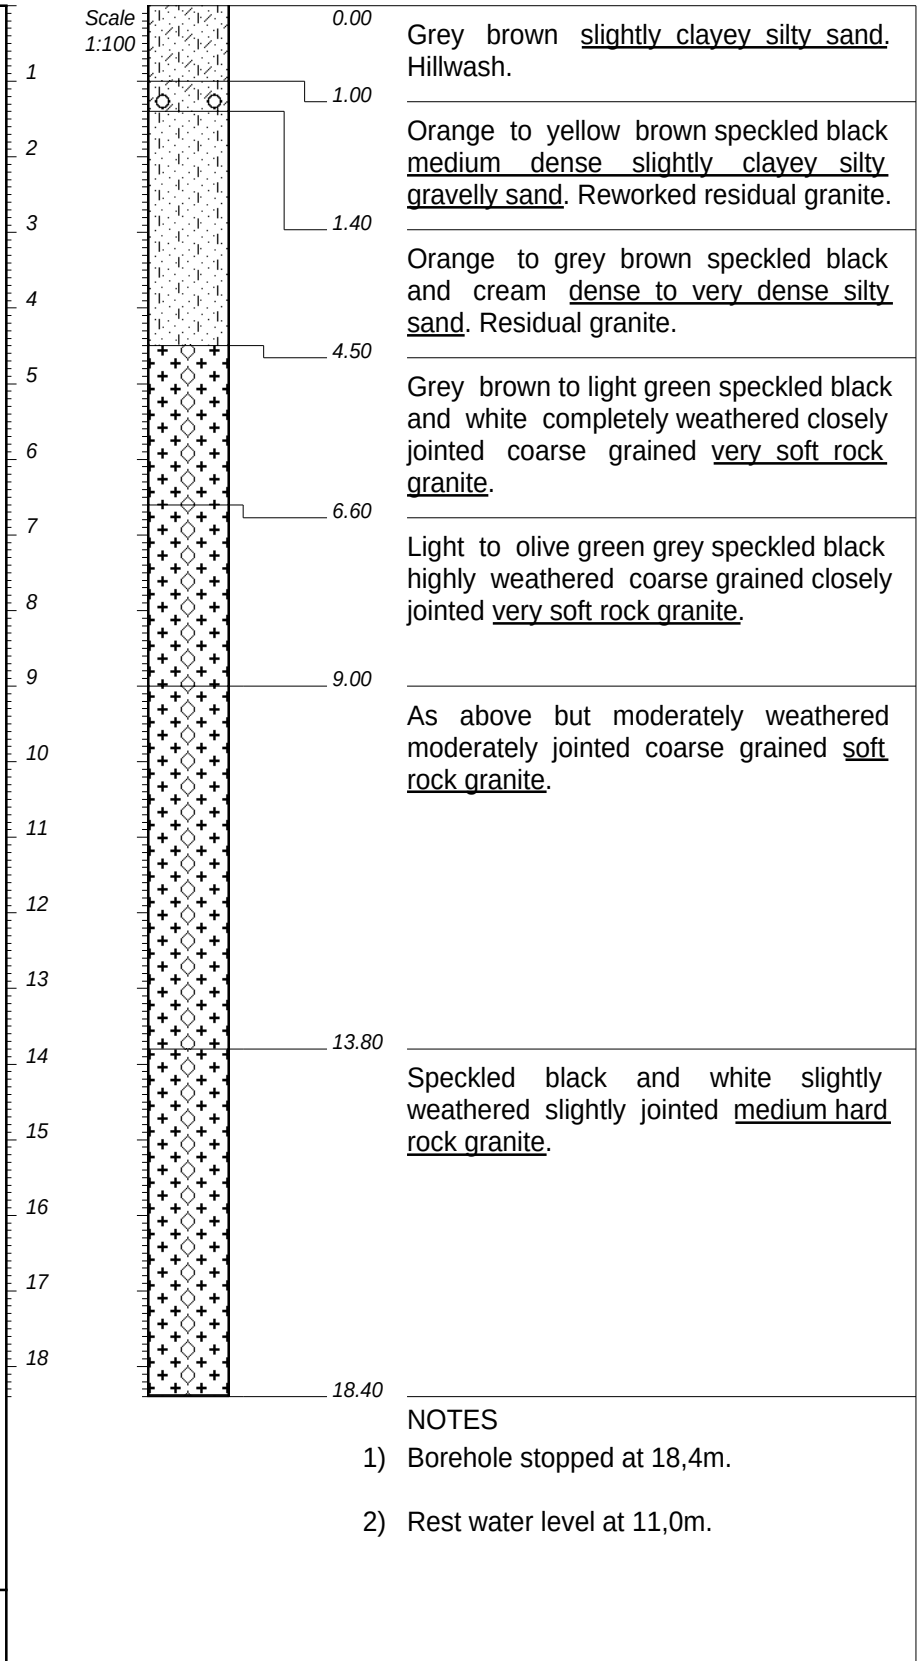

CONTRACTOR : RFGS
MACHINE :
DRILLED BY :
PROFIED BY : Warren
TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE : 11/12/2020
DATE : 11/12/2020 09:53
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

HOLE No: BH04

	GRAVEL	{SA02}
	GRAVELLY	{SA03}
	SAND	{SA04}
	SANDY	{SA05}
	SILT	{SA06}
	SILTY	{SA07}
	CLAYEY	{SA09}
	PLUTONIC/norite/syenite	{SA17}
	HYPABYSSAL/anorthosite/syenite aplite	{SA18}
	DIORITE FAMILY	{SA41}
	FREE QUARTZ/visible quartz	{SA44}
	GRANITE	{SA17}{SA44}
	DIABASE	{SA18}{SA41}
	FILL	{SA32}

CONTRACTOR :
MACHINE :
DRILLED BY :
PROFILED BY :

TYPE SET BY : Renee
SETUP FILE : STANDARD.SET

INCLINATION :
DIAM :
DATE :
DATE :

DATE : 11/12/2020 09:53
TEXT : ..wayHouseWaterUpgrade.txt

ELEVATION :
X-COORD :
Y-COORD :

LEGEND
SUMMARY OF SYMBOLS

APPENDIX D:
DYNAMIC PROBE SUPER HEAVY TEST
RESULTS

APPENDIX E: **LABORATORY TEST RESULTS**

FOUNDATION INDICATOR							Sheet Reference: R-STL-011 Rev02
Grading & Hydrometer Analysis (Particle Size (mm) & % Passing)				Atterberg Limits & Classification			
Sample	TP 3	TP 6	TP 11	Sample	TP 3	TP 6	TP 11
Depth (m)	0.5 - 1.3	0.6 - 1.35	0.25 - 0.85	Depth (m)	0.5 - 1.3	0.6 - 1.35	0.25 - 0.85
Lab No	CPA-38-148	CPA-38-149	CPA-38-150	Lab No	CPA-38-148	CPA-38-149	CPA-38-150
53.0	100	100	100	Liquid Limit (%)	35	26	20
37.5	100	100	100	Plastic Limit (%)	26	12	13
26.5	100	100	96	Plasticity Index (%)	9	14	7
19.0	100	100	95	Linear Shrinkage (%)	4.5	6.5	3.0
13.2	99	100	89	PI of whole sample	3	8	3
9.5	98	99	83				
6.7	97	98	77	% Gravel	28	7	37
4.75	94	97	72	% Sand	54	64	47
2.00	72	93	63	% Silt	13	13	9
1.00	48	79	54	% Clay	5	16	7
0.425	35	60	40	Activity	1.8	0.9	1.0
0.250	30	50	31				
0.150	26	41	24	% Soil Mortar	72	93	63
0.075	20	32	18				
0.060	18	29	16	Grading Modulus	1.73	1.15	1.79
0.050	16	27	15	Moisture Content (%)	N / T	N / T	N / T
0.035	14	23	12	Relative Density (SG)*	2.65	2.65	2.65
0.020	11	21	10				
0.006	8	18	8	Unified (ASTM D2487)	SC	SC	SC-SM
0.002	5	16	7	AASHTO (M145-91)	A - 2 - 4	A - 2 - 6	A - 2 - 4
Remarks: *: Assumed							
N / T: Not Tested							
Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.							



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za




www.stlab.co.za

Quality | Excellence | On Time

Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Job Number: CPA-38
Date: 2021-02-10
Method: SANS 3001 GR1, GR3, GR10 GR12 & BS 1377 (where applicable)

FOUNDATION INDICATOR

Sheet Reference:
R-STL-011 Rev02

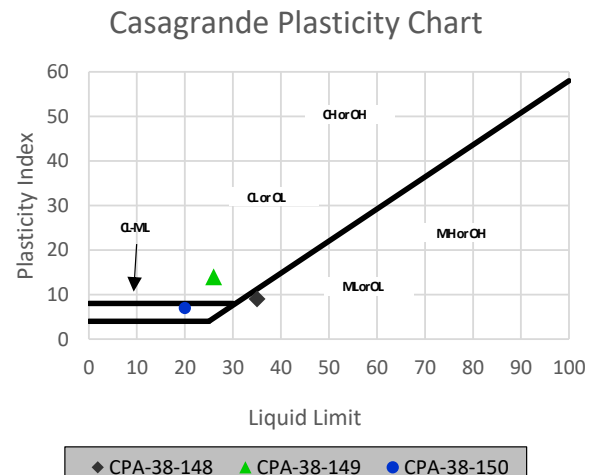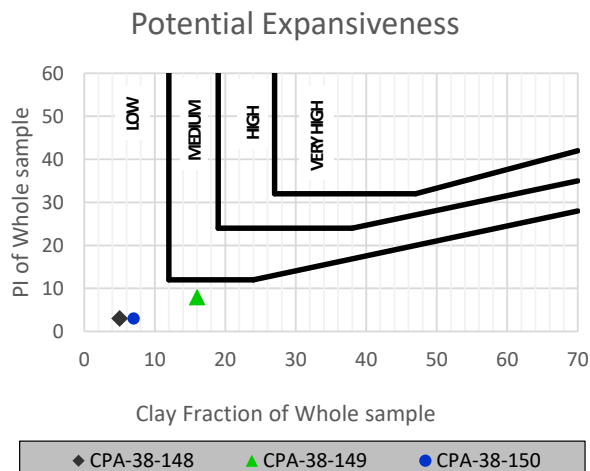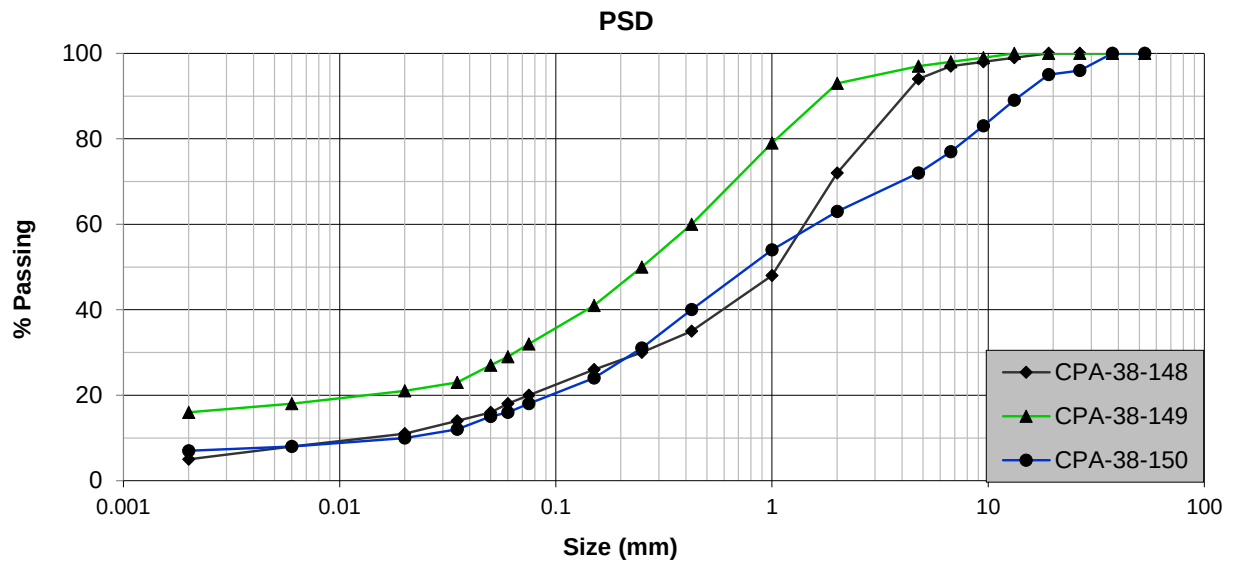

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place.
Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.

FOUNDATION INDICATOR							Sheet Reference: R-STL-011 Rev02
Grading & Hydrometer Analysis (Particle Size (mm) & % Passing)				Atterberg Limits & Classification			
Sample	TP 19	TP 67	TP 53	Sample	TP 19	TP 67	TP 53
Depth (m)	0 - 1.6	0 - 0.1	0.7 - 1.4	Depth (m)	0 - 1.6	0 - 0.1	0.7 - 1.4
Lab No	CPA-38-151	CPA-38-152	CPA-38-153	Lab No	CPA-38-151	CPA-38-152	CPA-38-153
53.0	100	100	100	Liquid Limit (%)	30	28	-
37.5	100	98	100	Plastic Limit (%)	20	16	-
26.5	100	95	100	Plasticity Index (%)	10	12	SP
19.0	100	90	100	Linear Shrinkage (%)	5.0	6.0	0.5
13.2	98	85	83	PI of whole sample	4	5	-
9.5	97	83	80				
6.7	95	81	75	% Gravel	20	29	35
4.75	92	79	73	% Sand	60	46	47
2.00	80	71	65	% Silt	12	15	14
1.00	57	58	55	% Clay	8	10	4
0.425	41	44	41	Activity	1.3	1.2	0.0
0.250	34	38	33				
0.150	29	33	27	% Soil Mortar	80	71	65
0.075	22	28	20				
0.060	20	25	18	Grading Modulus	1.57	1.57	1.74
0.050	18	23	16	Moisture Content (%)	N / T	N / T	N / T
0.035	16	20	13	Relative Density (SG)*	2.65	2.65	2.65
0.020	12	17	9				
0.006	9	12	6	Unified (ASTM D2487)	SC	SC	SM
0.002	8	10	4	AASHTO (M145-91)	A - 2 - 4	A - 2 - 6	A - 1 - b
Remarks: *: Assumed							
N / T: Not Tested							
Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.							



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za


www.stlab.co.za

Quality | Excellence | On Time


Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Job Number: CPA-38
Date: 2021-02-10
Method: SANS 3001 GR1, GR3, GR10 GR12 & BS 1377 (where applicable)

FOUNDATION INDICATOR


Sheet Reference:
R-STL-011 Rev02

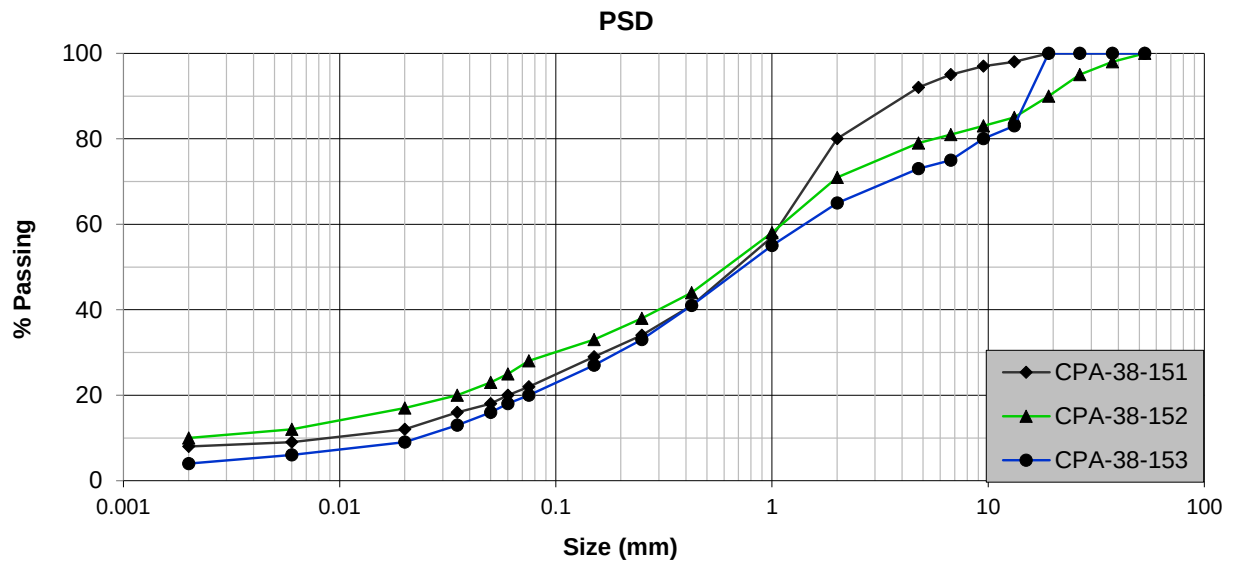

Potential Expansiveness

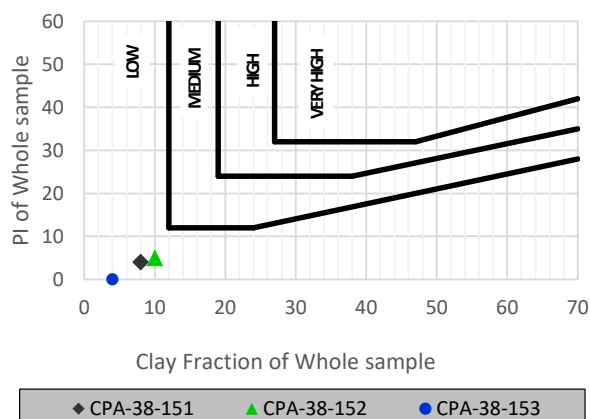

Casagrande Plasticity Chart

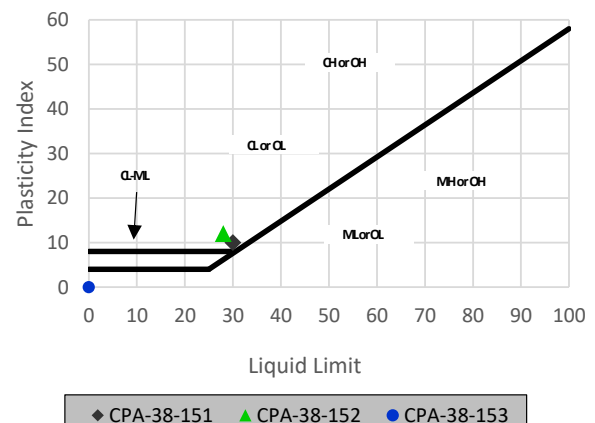

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place.

Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time

Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 3
Depth: (m) 0.5 - 1.3

Job Number: CPA-38
Lab Number: CPA-38-148
Method: SANS 3001 GR30
Date: 10-Feb-21


MDD & OMC DETERMINATION (Mod. AASHTO)

Sheet Reference:
R-STL-013 Rev01

Maximum Dry Density: **1902** kg/m³

Optimum Moisture Content: **11.4** %

Moisture Content (%)	9.4	10.4	11.4	12.4	13.4			
Dry Density (kg/m ³)	1873	1892	1902	1892	1870			

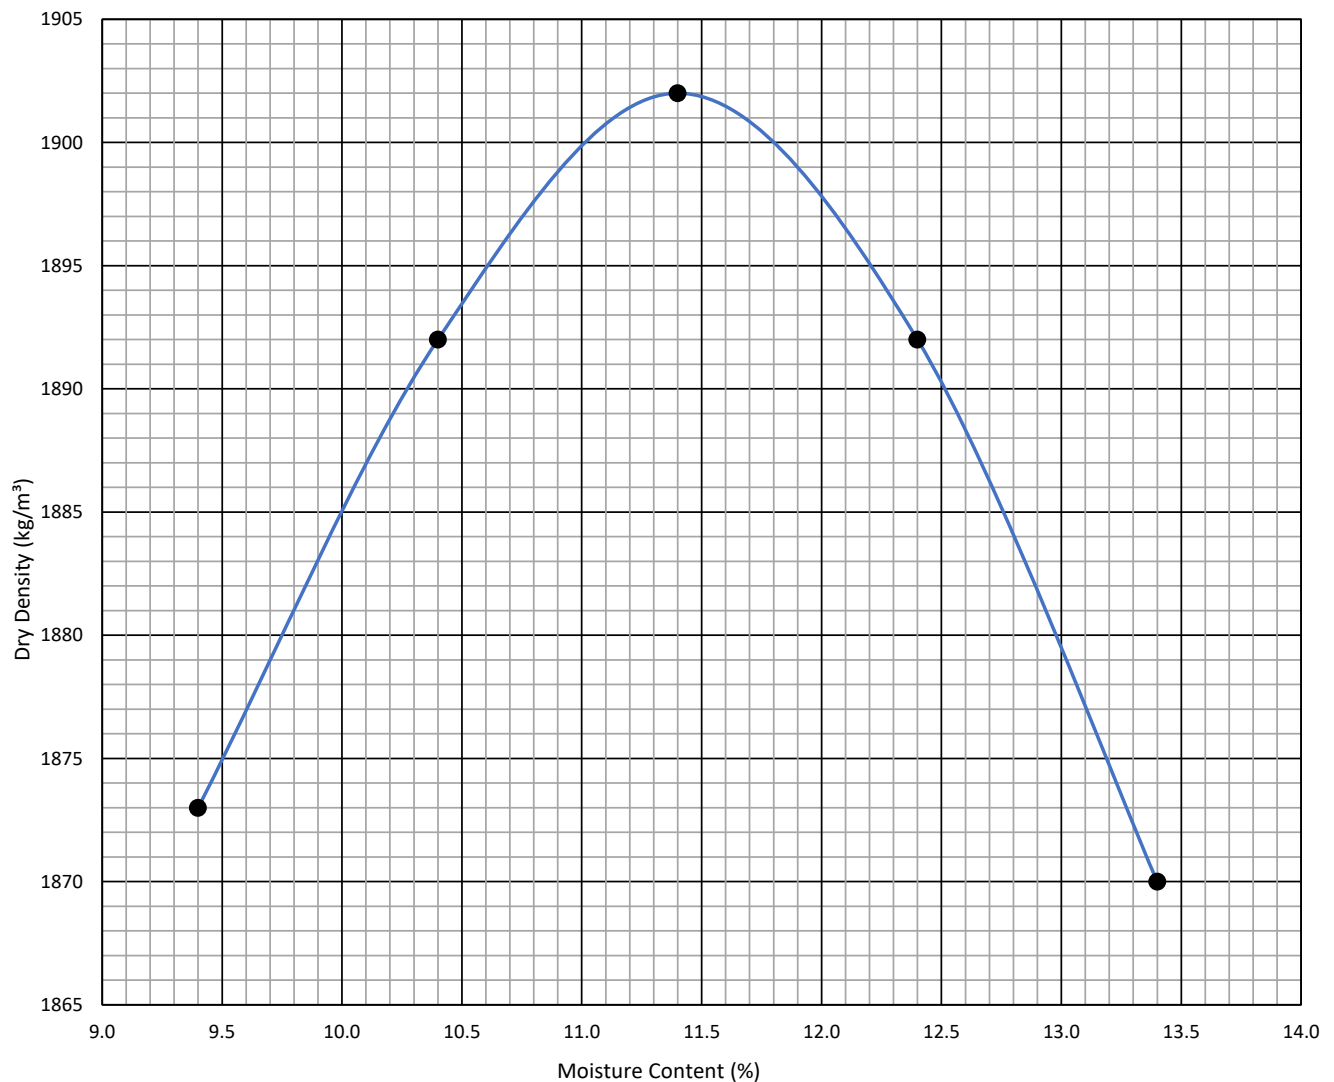

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186
Roelof | 072 674 6343 | roelof@stlab.co.za
Gerrie | 082 309 4448 | gerrie@stlab.co.za
www.stlab.co.za

Quality | Excellence | On Time


Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 3
Depth: (m) 0.5 - 1.3

Job Number: CPA-38
Lab Number: CPA-38-148
Method: SANS 3001 GR40
Date: 10-Feb-21

CALIFORNIA BEARING RATIO

Sheet Reference:
R-STL-014 Rev01

Mod. AASHTO Values		Compaction Data: CBR			Swell (%)	CBR at (mm)			CBR Values	
MDD (kg/m ³)	OMC (%)	Dry Dens. (kg/m ³)	MC (%)	Comp. (%)		2.5	5.0	7.5	Compaction (%)	CBR
1902	11.4	1913	10.8	100.0	0.0	44	52	55	100	44
									98	41
									97	39
1902	11.4	1808	10.8	94.5	0.0	36	35	34	95	36
									93	30
1902	11.4	1712	10.8	89.5	0.0	20	18	17	90	21

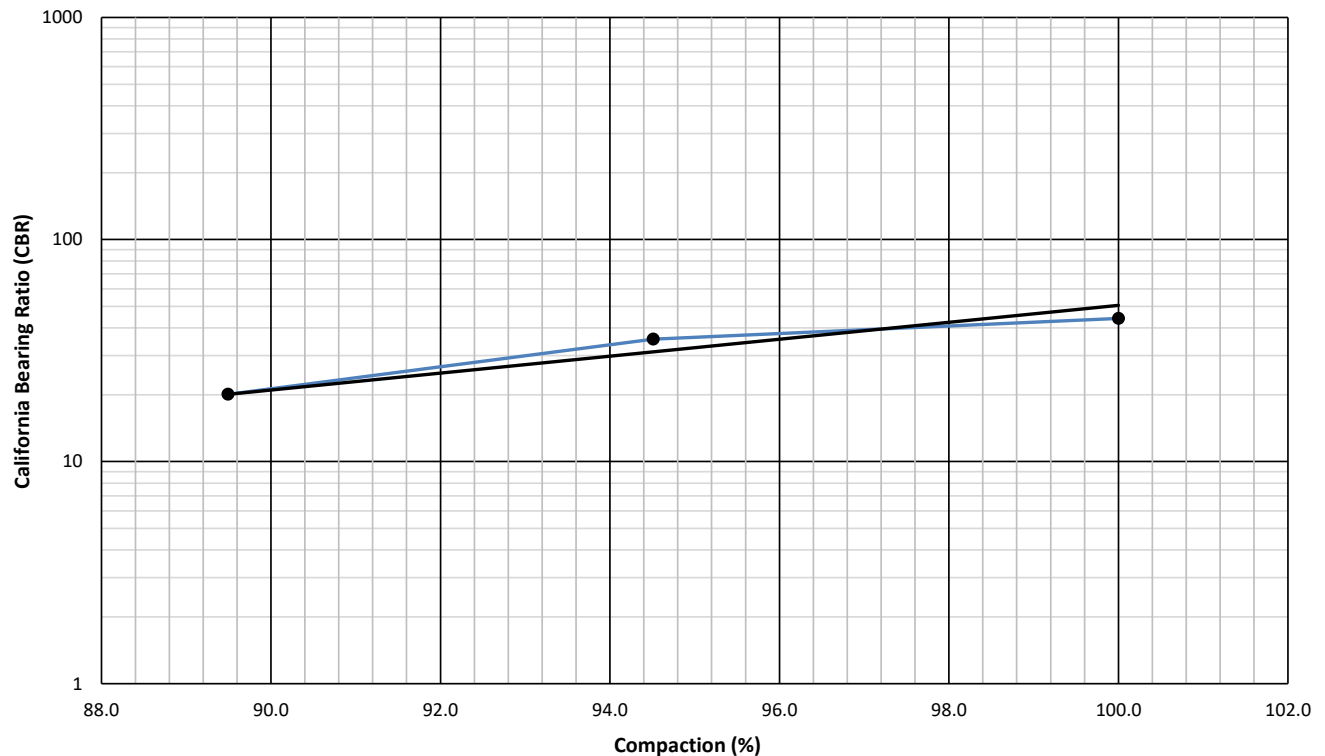

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerie | 082 309 4448 | gerie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time

Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 6
Depth: (m) 0.6 - 1.35

Job Number: CPA-38
Lab Number: CPA-38-149
Method: SANS 3001 GR30
Date: 10-Feb-21


MDD & OMC DETERMINATION (Mod. AASHTO)

Sheet Reference:
R-STL-013 Rev01

Maximum Dry Density: **2085** kg/m³

Optimum Moisture Content: **7.5** %

Moisture Content (%)	5.5	6.5	7.5	8.5	9.5			
Dry Density (kg/m ³)	1998	2046	2085	2052	2006			

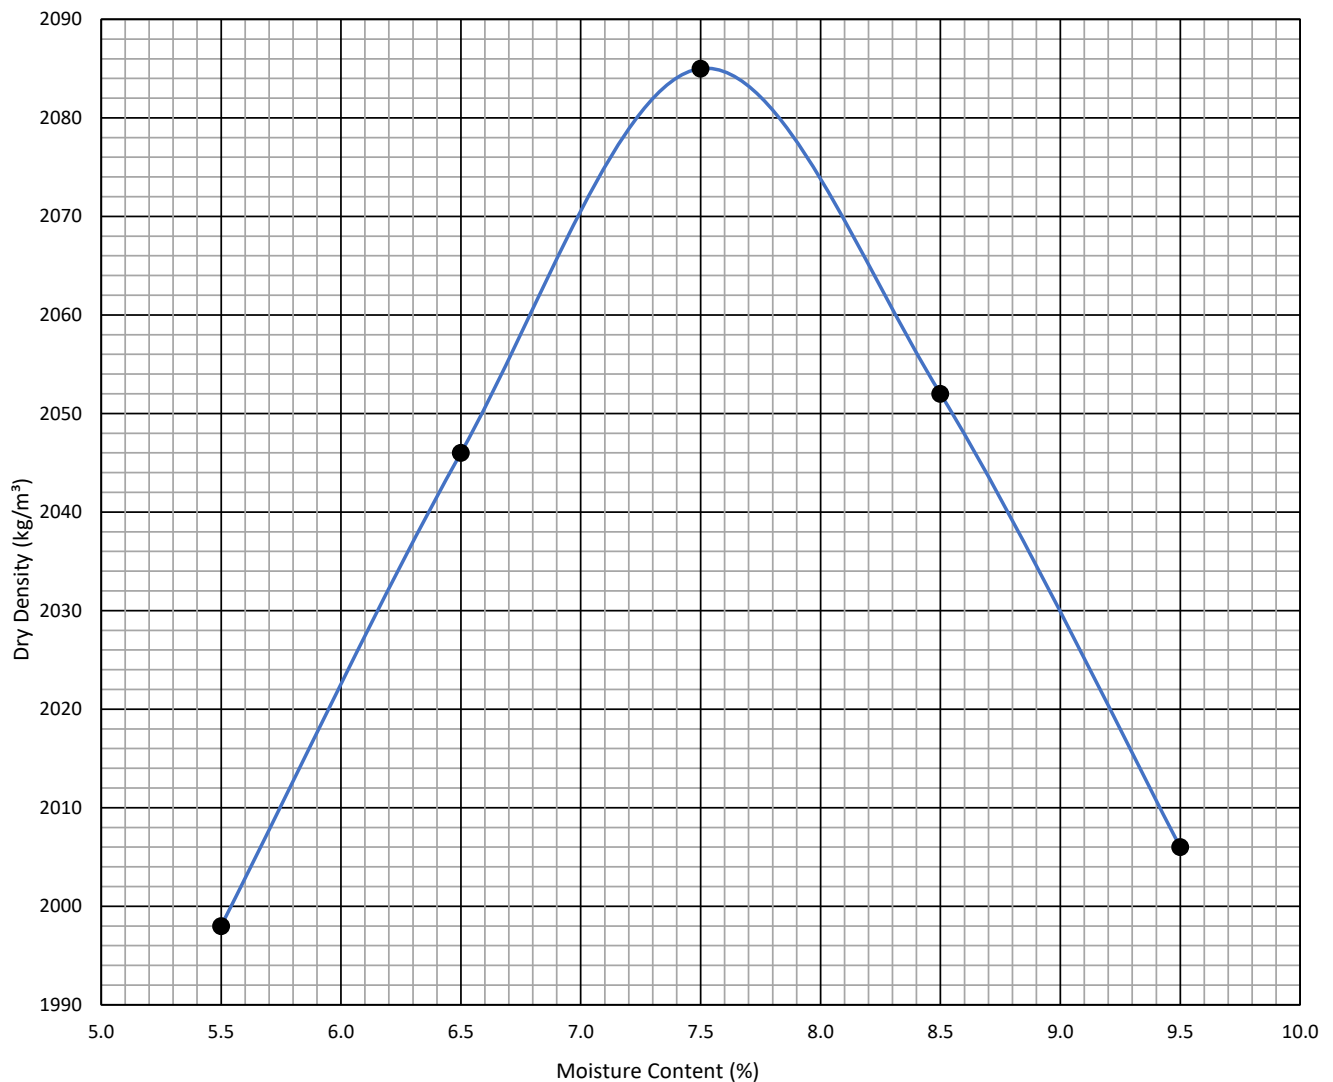

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time


Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 6
Depth: (m) 0.6 - 1.35

Job Number: CPA-38
Lab Number: CPA-38-149
Method: SANS 3001 GR40
Date: 10-Feb-21

CALIFORNIA BEARING RATIO

Sheet Reference:
R-STL-014 Rev01

Mod. AASHTO Values		Compaction Data: CBR			Swell (%)	CBR at (mm)			CBR Values	
MDD (kg/m ³)	OMC (%)	Dry Dens. (kg/m ³)	MC (%)	Comp. (%)		2.5	5.0	7.5	Compaction (%)	CBR
2085	7.5	2061	8.2	100.0	0.0	30	32	33	100	30
									98	28
									97	27
2085	7.5	1958	8.2	95.0	0.0	25	27	25	95	25
									93	21
2085	7.5	1823	8.2	88.5	0.0	13	10	8	90	15

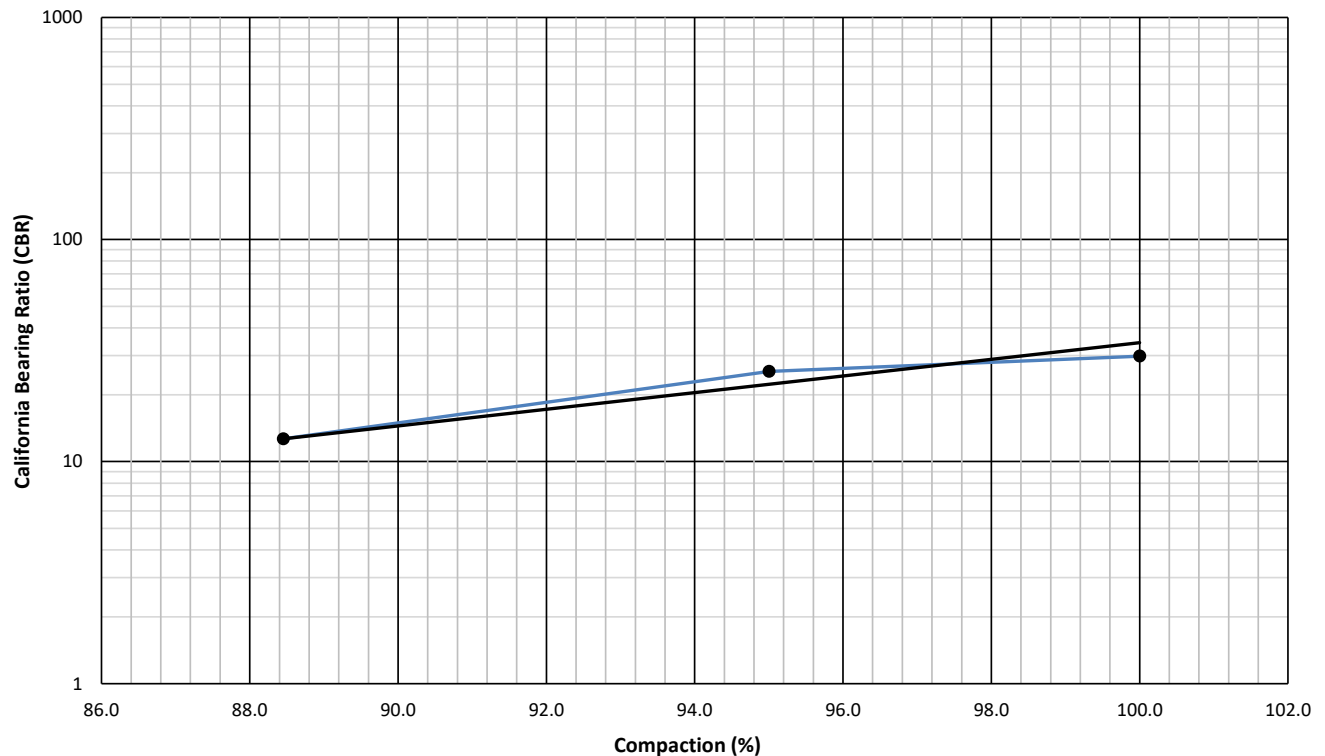

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time

Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 11
Depth: (m) 0.25 - 0.85

Job Number: CPA-38
Lab Number: CPA-38-150
Method: SANS 3001 GR30
Date: 10-Feb-21


MDD & OMC DETERMINATION (Mod. AASHTO)

Sheet Reference:
R-STL-013 Rev01

Maximum Dry Density: **2146** kg/m³

Optimum Moisture Content: **6.3** %

Moisture Content (%)	4.6	5.6	6.6	7.6	8.6			
Dry Density (kg/m ³)	2102	2134	2140	2107	2057			

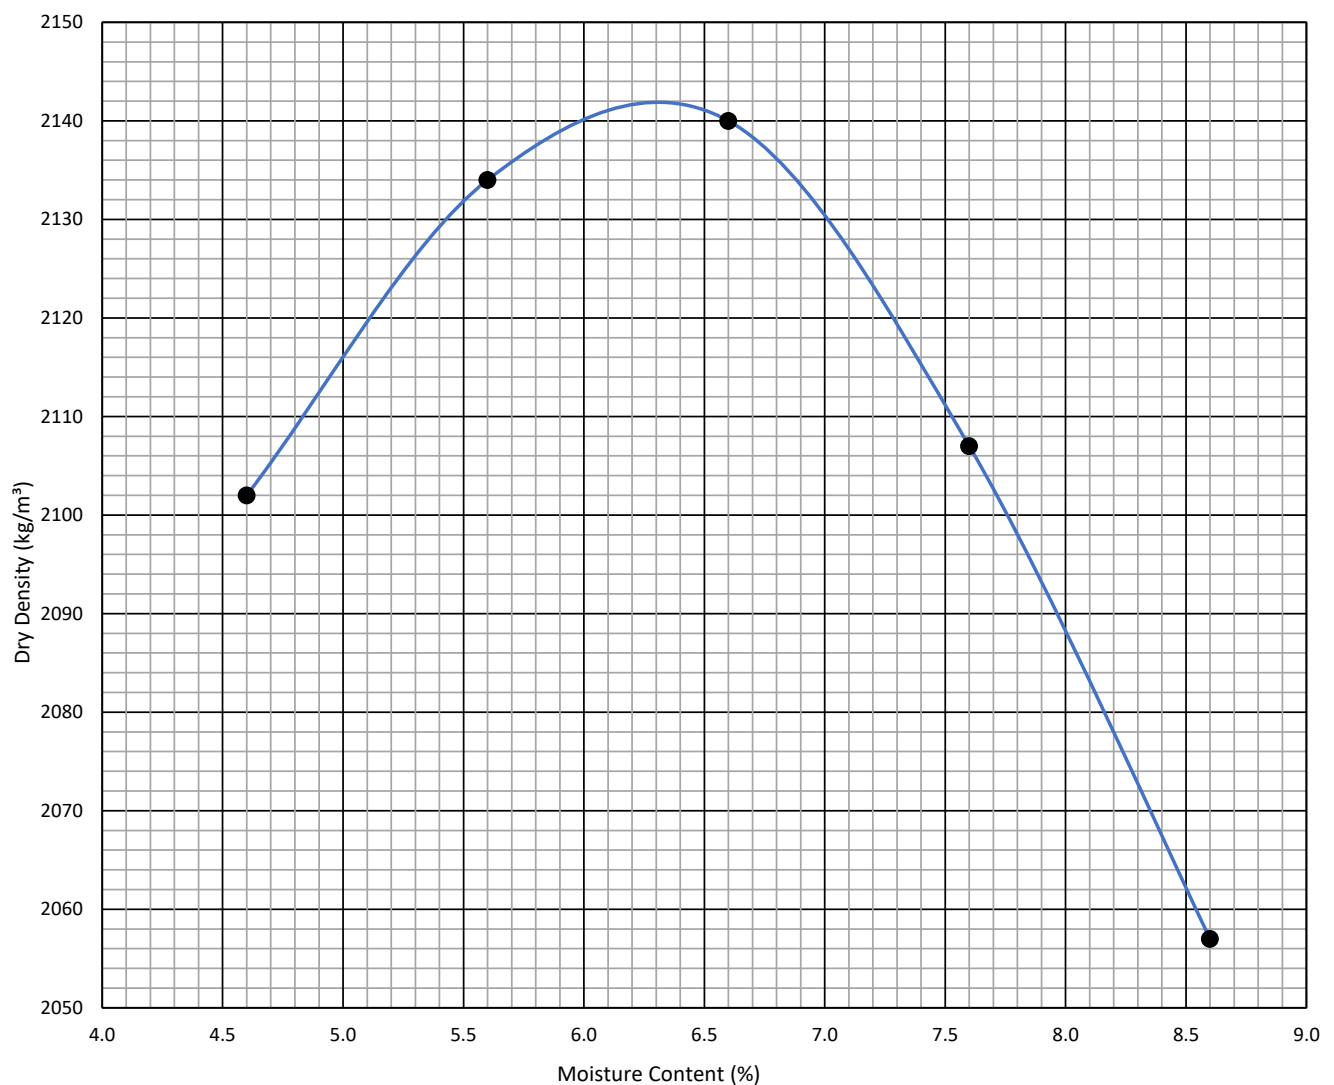

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time


Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 11
Depth: (m) 0.25 - 0.85

Job Number: CPA-38
Lab Number: CPA-38-150
Method: SANS 3001 GR40
Date: 10-Feb-21

CALIFORNIA BEARING RATIO

Sheet Reference:
R-STL-014 Rev01

Mod. AASHTO Values		Compaction Data: CBR			Swell (%)	CBR at (mm)			CBR Values	
MDD (kg/m ³)	OMC (%)	Dry Dens. (kg/m ³)	MC (%)	Comp. (%)		2.5	5.0	7.5	Compaction (%)	CBR
2146	6.3	2144	6.3	100.0	0.0	43	52	59	100	43
									98	38
									97	36
2146	6.3	2043	6.3	95.3	0.0	33	38	38	95	31
									93	23
2146	6.3	1947	6.3	90.8	0.0	16	15	14	90	14

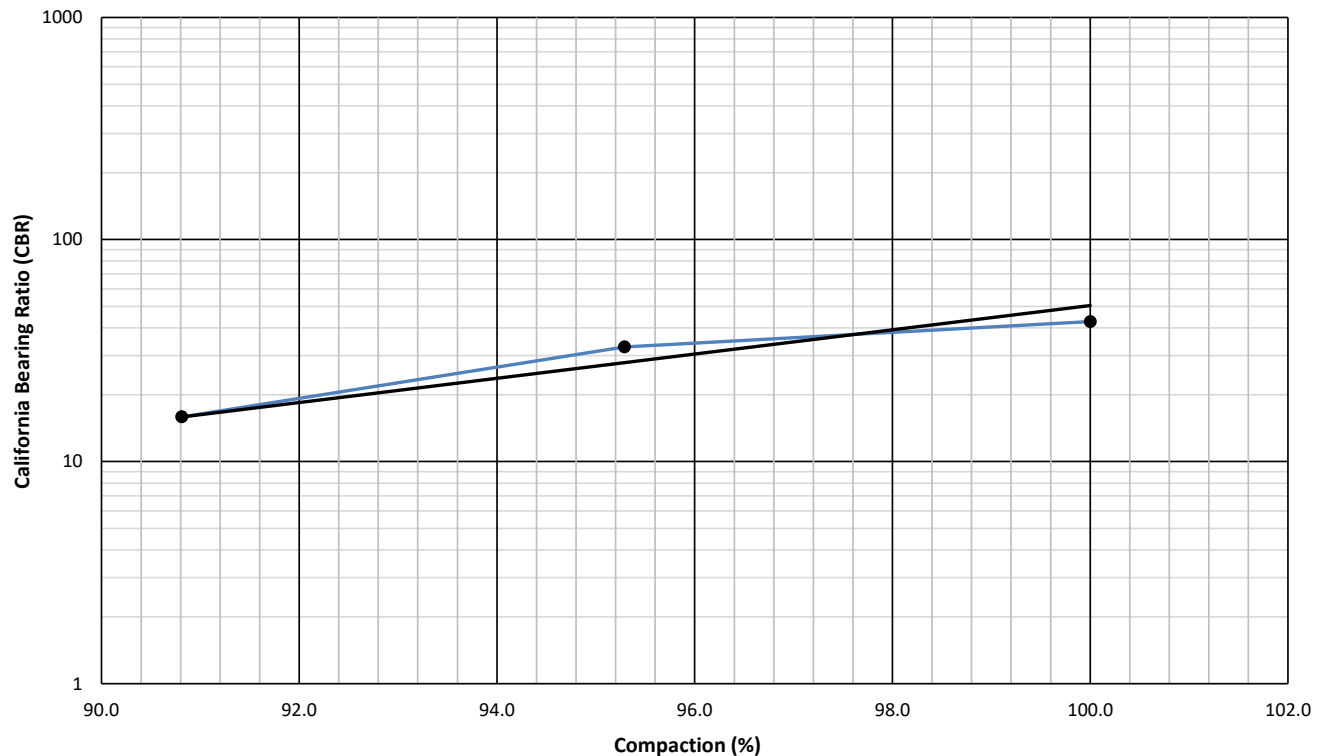

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time

Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 19
Depth: (m) 0 - 1.6

Job Number: CPA-38
Lab Number: CPA-38-151
Method: SANS 3001 GR30
Date: 10-Feb-21


MDD & OMC DETERMINATION (Mod. AASHTO)

Sheet Reference:
R-STL-013 Rev01

Maximum Dry Density: **1988** kg/m³

Optimum Moisture Content: **9.2** %

Moisture Content (%)	7.0	8.0	9.0	10.0	11.0			
Dry Density (kg/m ³)	1953	1974	1985	1981	1964			

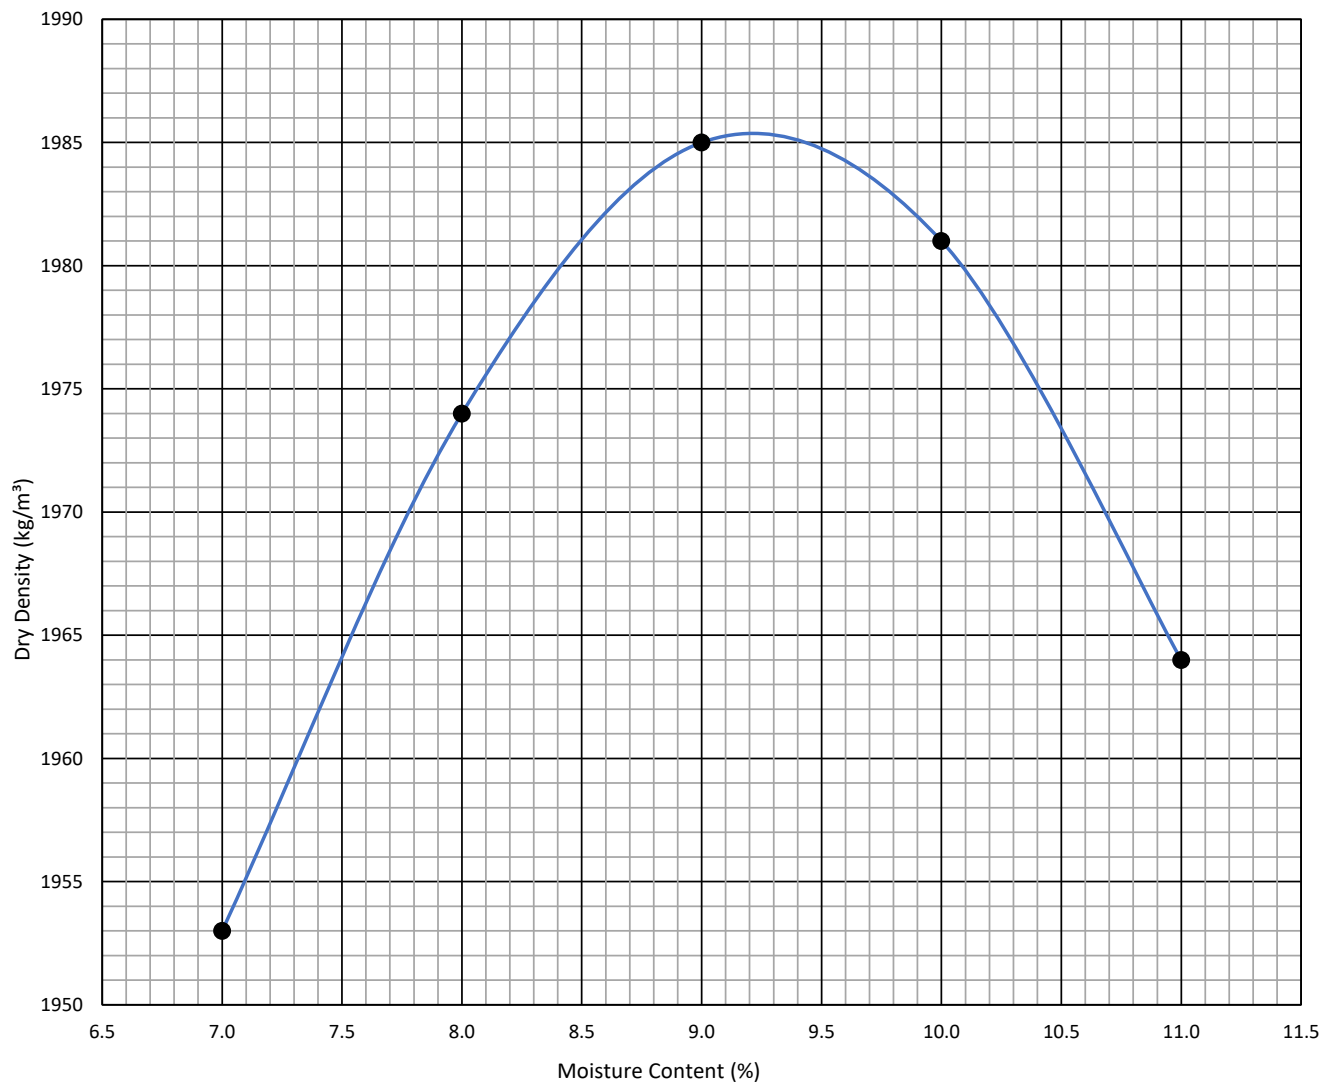

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time


Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 19
Depth: (m) 0 - 1.6

Job Number: CPA-38
Lab Number: CPA-38-151
Method: SANS 3001 GR40
Date: 10-Feb-21

CALIFORNIA BEARING RATIO

Sheet Reference:
R-STL-014 Rev01

Mod. AASHTO Values		Compaction Data: CBR			Swell (%)	CBR at (mm)			CBR Values	
MDD (kg/m ³)	OMC (%)	Dry Dens. (kg/m ³)	MC (%)	Comp. (%)		2.5	5.0	7.5	Compaction (%)	CBR
1988	9.2	1988	9.3	100.0	0.1	39	52	57	100	39
									98	36
									97	34
1988	9.2	1882	9.3	94.7	0.1	31	35	34	95	31
									93	26
1988	9.2	1761	9.3	88.6	0.1	17	16	14	90	20

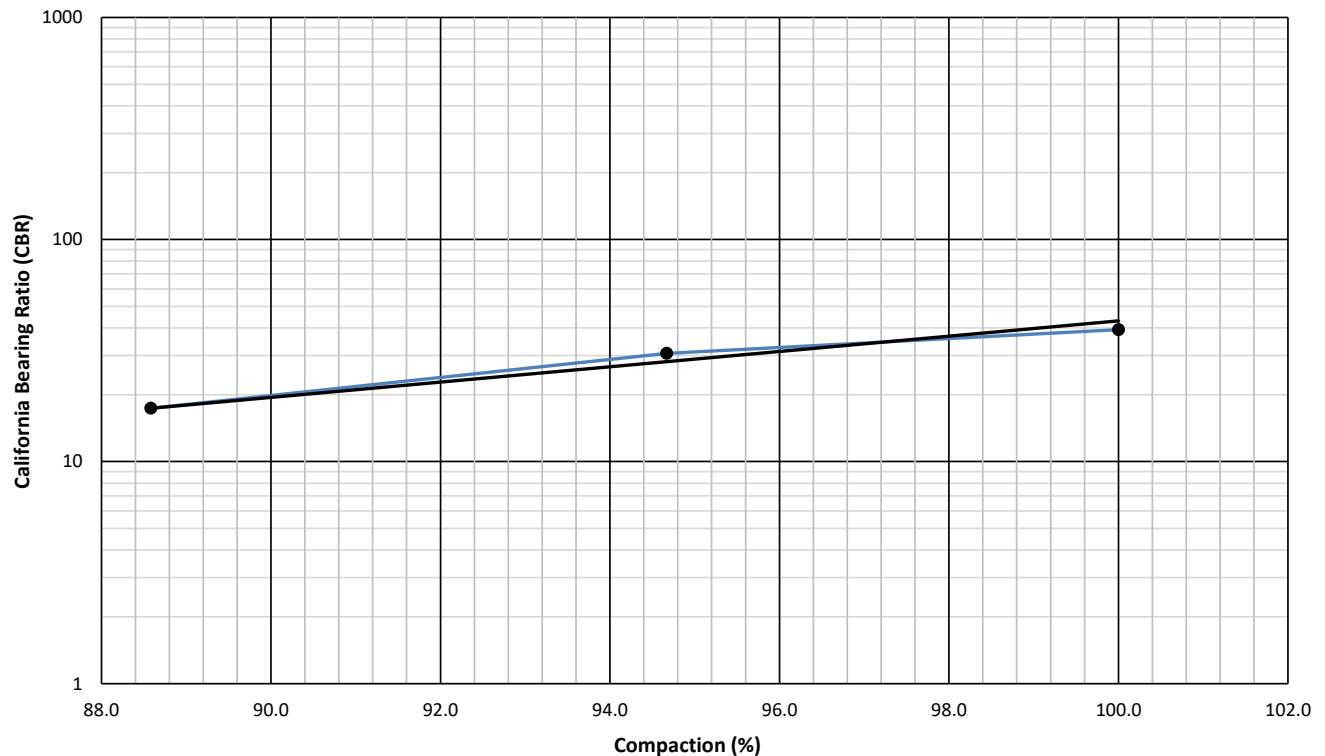

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time

Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 67
Depth: (m) 0 - 0.1

Job Number: CPA-38
Lab Number: CPA-38-152
Method: SANS 3001 GR30
Date: 10-Feb-21


MDD & OMC DETERMINATION (Mod. AASHTO)

Sheet Reference:
R-STL-013 Rev01

Maximum Dry Density: **2059** kg/m³

Optimum Moisture Content: **8.5** %

Moisture Content (%)	6.2	7.2	8.2	9.2	10.2			
Dry Density (kg/m ³)	1997	2031	2055	2051	2024			

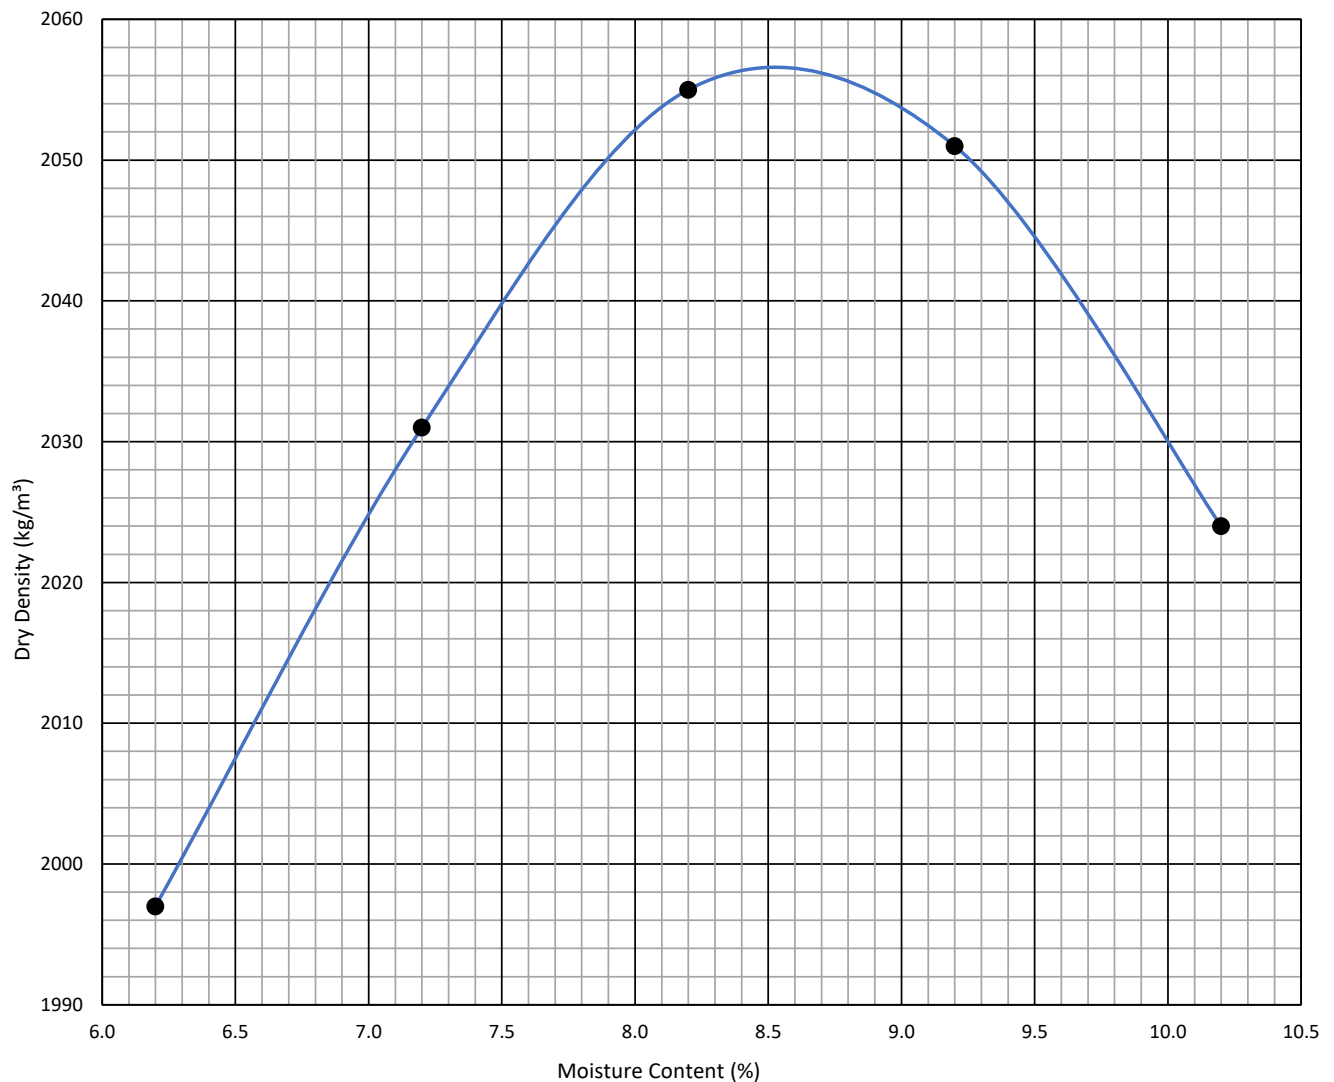

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time


Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 67
Depth: (m) 0 - 0.1

Job Number: CPA-38
Lab Number: CPA-38-152
Method: SANS 3001 GR40
Date: 10-Feb-21

CALIFORNIA BEARING RATIO

Sheet Reference:
R-STL-014 Rev01

Mod. AASHTO Values		Compaction Data: CBR			Swell	CBR at (mm)			CBR Values	
MDD	OMC	Dry Dens.	MC	Comp.		2.5	5.0	7.5	Compaction (%)	CBR
(kg/m ³)	(%)	(kg/m ³)	(%)	(%)	(%)					
2059	8.5	2070	8.6	100.0	0.1	24	28	31	100	24
									98	22
									97	21
2059	8.5	1972	8.6	95.3	0.2	20	22	23	95	19
									93	15
2059	8.5	1849	8.6	89.3	0.3	10	9	8	90	10

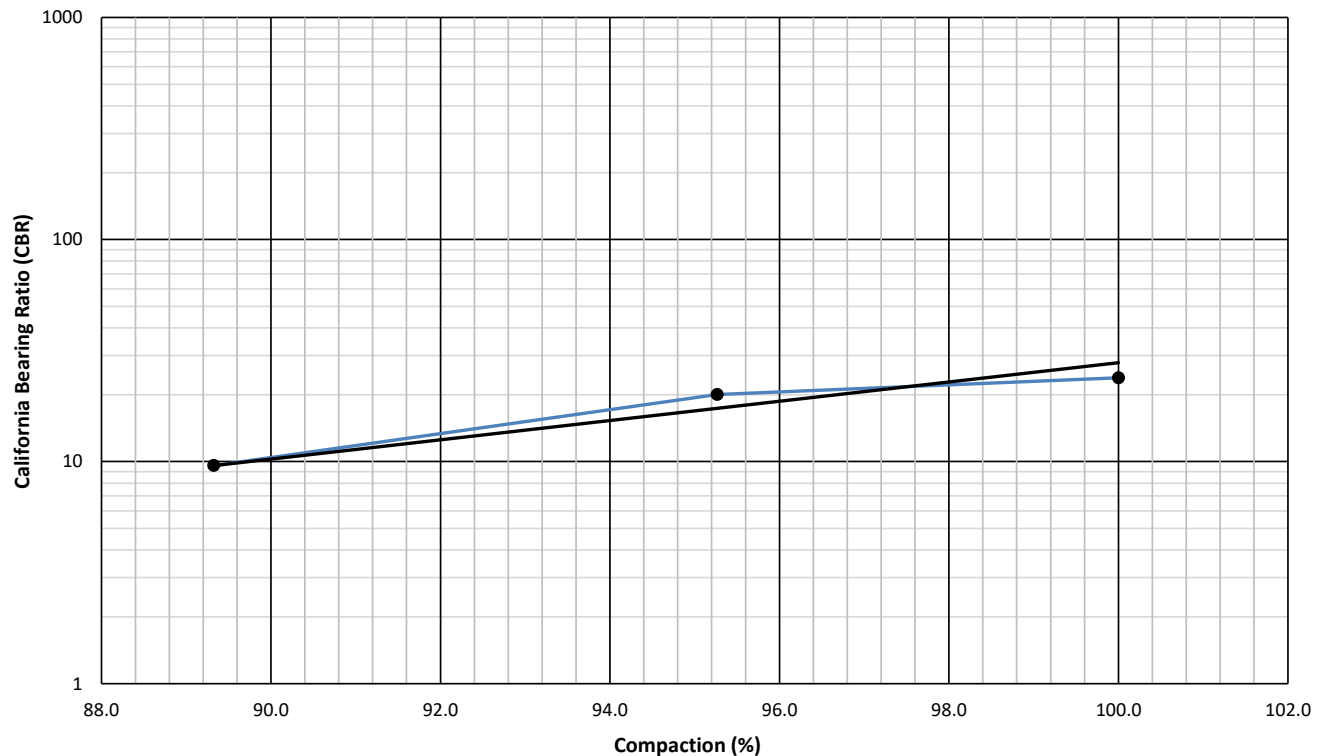

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time

Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 53
Depth: (m) 0.7 - 1.4

Job Number: CPA-38
Lab Number: CPA-38-153
Method: SANS 3001 GR30
Date: 10-Feb-21


MDD & OMC DETERMINATION (Mod. AASHTO)

Sheet Reference:
R-STL-013 Rev01

Maximum Dry Density: **2099** kg/m³

Optimum Moisture Content: **7.3** %

Moisture Content (%)	5.0	6.0	7.0	8.0	9.0			
Dry Density (kg/m ³)	2042	2072	2094	2087	2053			

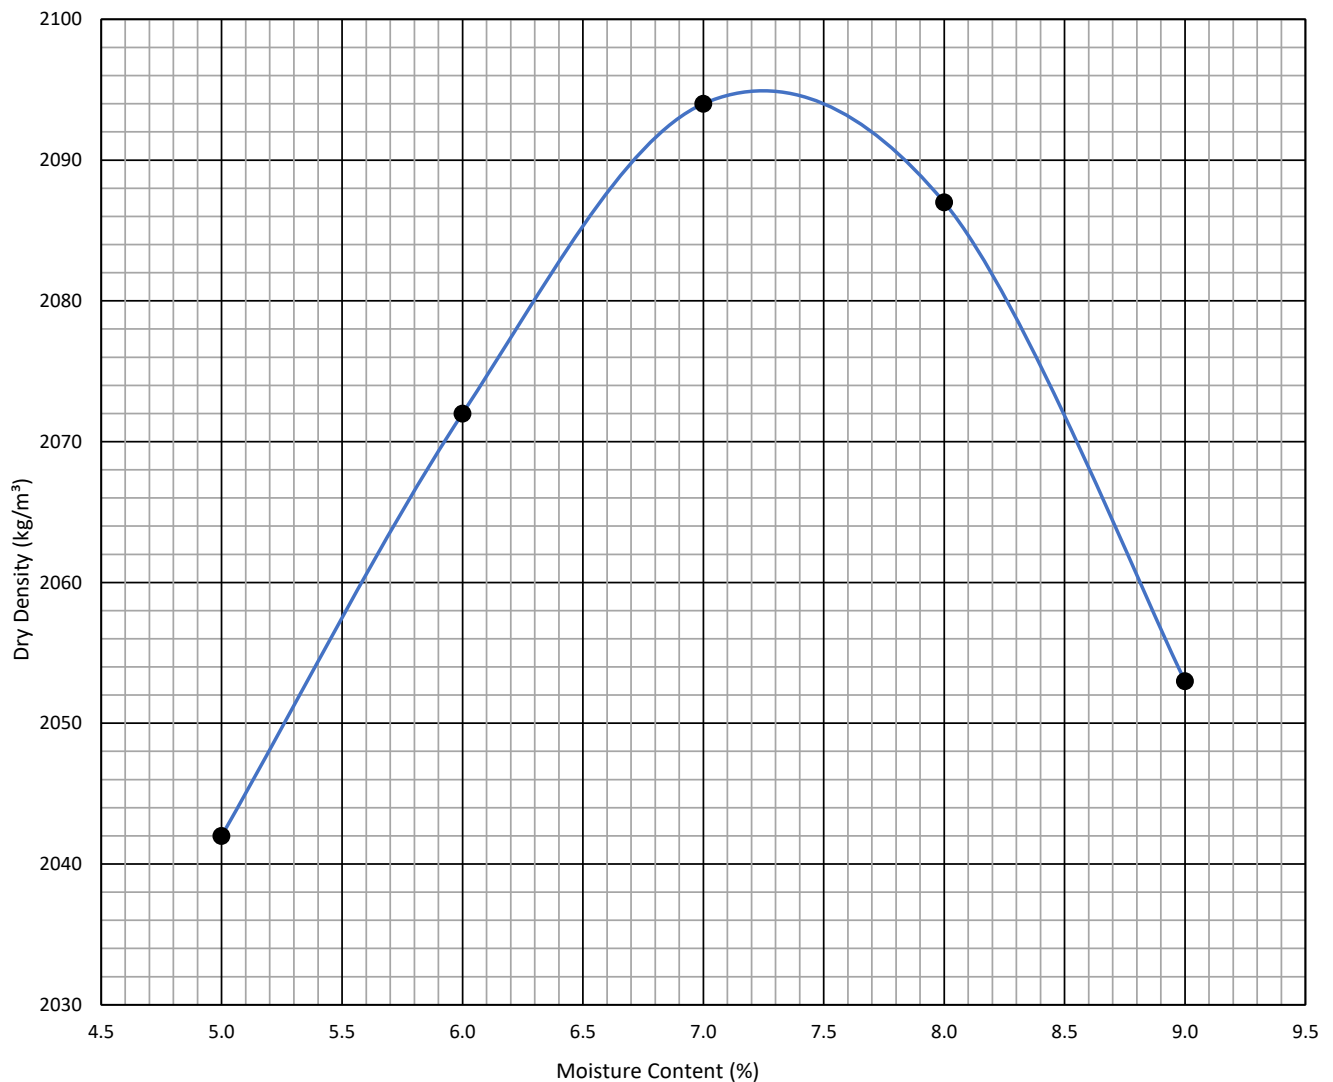

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.



**Specialised
Testing
Laboratory** (Pty) Ltd
Asphalt | Aggregate | Bitumen | Geotechnical

Unit 1, 13 Bloubokkie Street, Koedoespoort 0186

Roelof | 072 674 6343 | roelof@stlab.co.za

Gerrie | 082 309 4448 | gerrie@stlab.co.za

www.stlab.co.za

Quality | Excellence | On Time


Client Name: Crossman Pape & Associates
Project Name: 2091: Halfway House Water Upgrade
Sample: TP 53
Depth: (m) 0.7 - 1.4

Job Number: CPA-38
Lab Number: CPA-38-153
Method: SANS 3001 GR40
Date: 10-Feb-21

CALIFORNIA BEARING RATIO

Sheet Reference:
R-STL-014 Rev01

Mod. AASHTO Values		Compaction Data: CBR			Swell	CBR at (mm)			CBR Values	
MDD	OMC	Dry Dens.	MC	Comp.		2.5	5.0	7.5	Compaction (%)	CBR
(kg/m ³)	(%)	(kg/m ³)	(%)	(%)	(%)					
2099	7.3	2085	7.3	100.0	0.0	44	53	57	100	44
									98	42
									97	41
2099	7.3	2017	7.3	96.7	0.0	41	48	49	95	31
									93	23
2099	7.3	1928	7.3	92.5	0.0	21	20	18	90	14

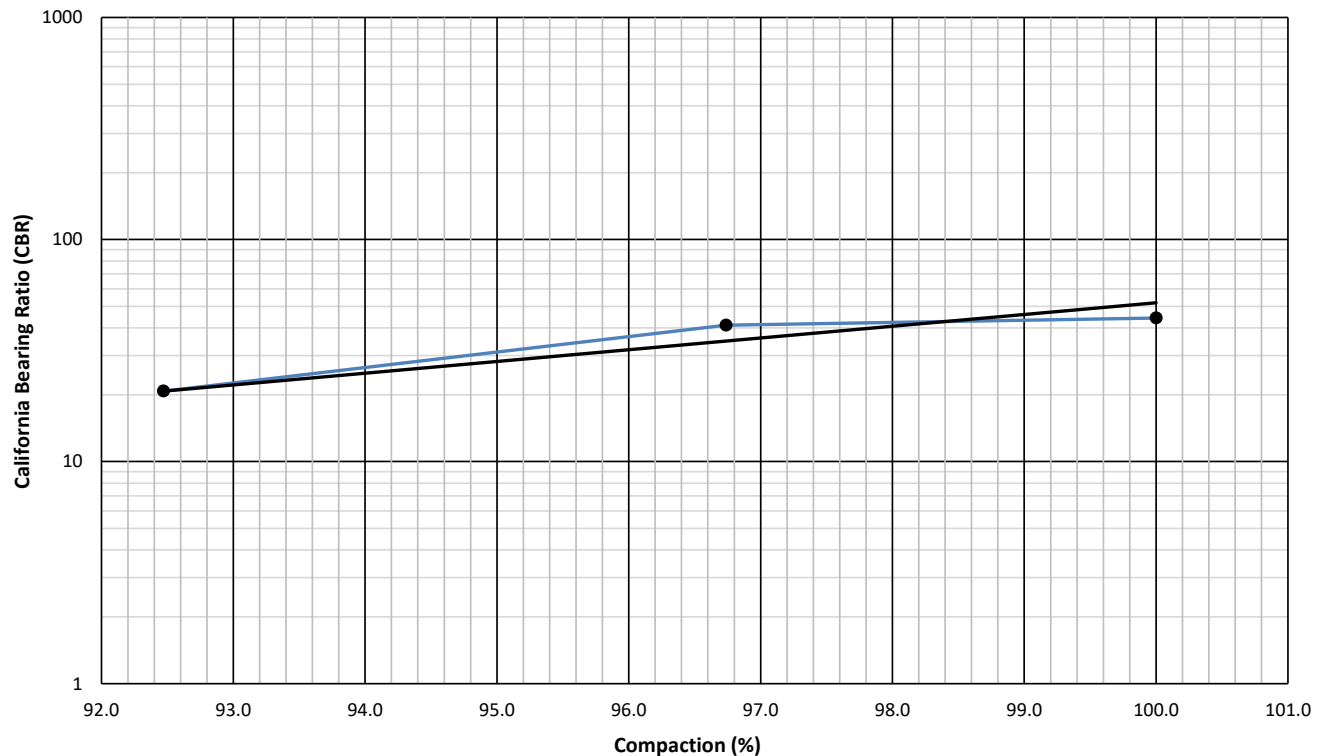

Although everything possible is done to ensure testing is performed accurately, neither Specialised Testing Laboratory (Pty) Ltd nor any of its directors, managers, employees or contractors can be held liable for any damages whatsoever arising from any error made in performing any tests, nor from any conclusions drawn therefrom. Test results are to be published in full. Samples will be kept for 1 month after the submission of test results due to limited storage space, unless other arrangements are in place. Confidentiality statement: Unless the release of information is required by law or covered by confidentiality agreements all information obtained or created during the performance of laboratory activities will be kept confidential.

Client :	CROSSMAN PAPE ASSOCIATES cc	Client Reference :	
Address :	P O BOX 3557	Order No. :	Mark
	KRAMERVIEW		
	2060		
Attention :		Date Received :	01/02/2021
Facsimile :	011 465 4586	Date Tested :	01/02/2021 - 16/02/2021
E-mail :	lynne@crossmanpape.co.za	Date Reported :	16/02/2021
Project :	Halfway House Water Upgrade	Report Status :	Final
Project No. :	2021-B-86	Page :	1 of 16

Herewith please find the test report(s) pertaining to the above project. All tests were conducted in accordance with prescribed test method(s). Information herein consists of the following:

Test(s) conducted / Item(s) measured	Qty.	Test Method(s)	Authorized By**	Page(s)
Moisture Density Relationship	7.000	SANS 3001 GR30	B Mvubu	6-12
Atterberg Limits <0.425mm	7.000	SANS 3001 GR10	B Mvubu	2-5; 13-16
Sieve Analysis 0.075mm	7.000	SANS 3001 GR1	B Mvubu	2-5; 13-16
California Bearing Ratio (CBR)	7.000	SANS 3001 GR40	B Mvubu	13-16
Hydrometer Analysis	7.000	SANS 3001 GR3	B Mvubu	2-5

Any test results contained in this report and marked with * in the table above are "not SANAS accredited" and are not included in the schedule of accreditation for this laboratory.

Any information contained in this test report pertain only to the areas and/or samples tested. Documents may only be reproduced or published in their full context.

While every care is taken to ensure that all tests are carried out in accordance with recognised standards, neither Civilab (Proprietary) Limited nor its employess shall be liable in any way whatsoever for any error made in the execution or reporting of tests or any erroneous conclusions drawn therefrom or for any consequences thereof.

All interpretations, Interpolations, Opinions and/or Classifications contained in this report falls outside our scope of accreditation.

The following parameters, where applicable, were excluded from the classification procedure: Chemical modifications, Additional fines, Fractured Faces, Soluble Salts, pH, Conductivity, Coarse Sand Ratio, Durability (COLTO: G4-G9).

The following parameters, where applicable, were assumed: Rock types were assumed to be of an Arenaceous nature with Siliceous cementing material.

Unless otherwise requested or stated, all samples will be discarded after a period of 3 months.

This report is completely confidential between the parties (Civilab and Civilab's client) and shall not be disclosed to anybody else, unless agreed upon in writing or made publicly available by the client or required to make available by law.

Deviations in Test Methods:

Technical Signatory:	
Signature:	


**All results are authorized electronically by approved managers and/or technical signatories.

Client : CROSSMAN PAPE AND ASSOCIATES CC
 Project : Halfway House
 Project No : 2021-B-86

Date Received: 01/02/2021
 Date Reported: 16/02/2021
 Page No. : 2 of 16

FOUNDATION INDICATOR

Laboratory Number	S23	S24
Field Number	TP5	TP24
Client Reference		
Depth (m)	0.6-1.35	0.6-1.4
Position		
Coordinates	X Y	
Description		
Additional Information		
Calcrete / Crushed Stabilizing Agent		

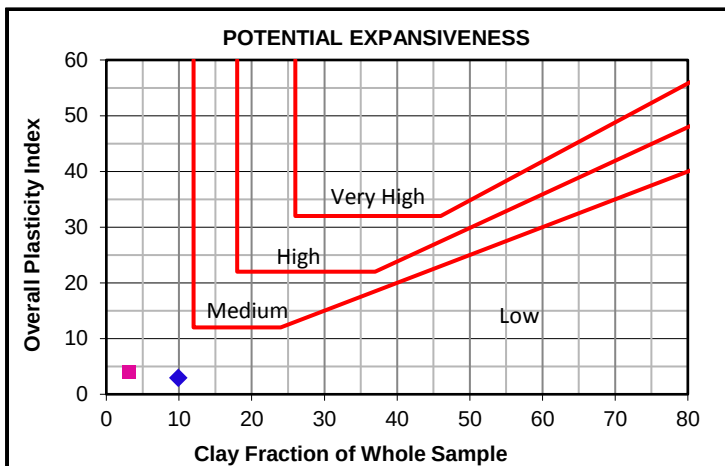


Moisture Content & Relative Density

Moisture Content (%)		
Relative Density (S.G.)		

Sieve Analysis (Wet Prep)

Percentage Passing	100 mm	100	100
	75 mm	100	100
	63 mm	100	100
	50 mm	100	100
	37.5 mm	100	100
	28 mm	100	100
	20 mm	100	100
	14 mm	90	92
	5 mm	67	83
	2 mm	60	71
	1 mm	51	52
	0.425 mm	36	35
	0.250 mm	28	29
	0.150 mm	21	25
0.075 mm	16	21	
Grading Modulus		1.87	1.74

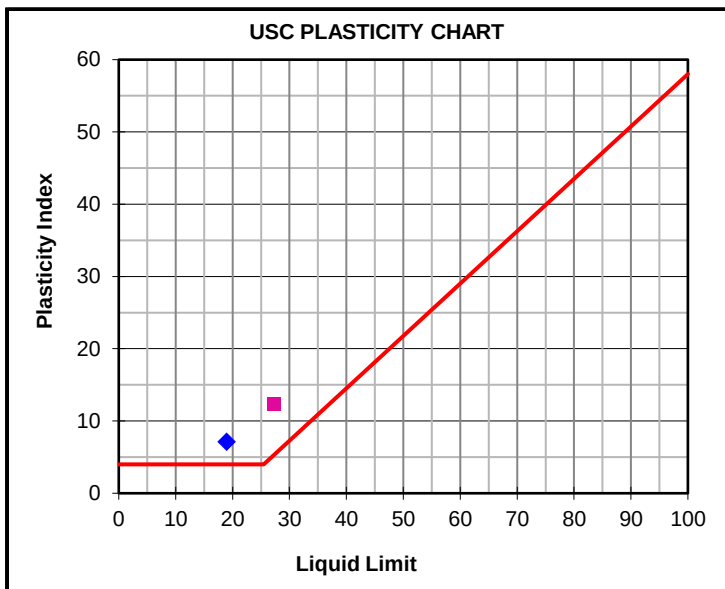

Hydrometer Analysis


Percentage Passing	0.060 mm	13	13
	0.040 mm	12	8
	0.020 mm	10	6
	0.006 mm	10	5
	0.002 mm	10	3
Gravel	%	40	29
Sand	%	47	58
Silt	%	3	9
Clay	%	10	3

Laboratory Number		S23	◆	S24	■
Atterberg Limits -425μ					
Liquid Limit	%	19		27	
Plasticity Index	%	7		12	
Linear Shrinkage	%	2.5		5.5	
Overall PI	%	3		4	

Classifications

HRB (AASHTO)	A-2-4(0)	A-2-6(0)
Unified (ASTM D2487)	SC	SC
Weston Swell @ 1 kPa		

Note: An assumed S.G. may be used in Hydrometer Analysis calculations

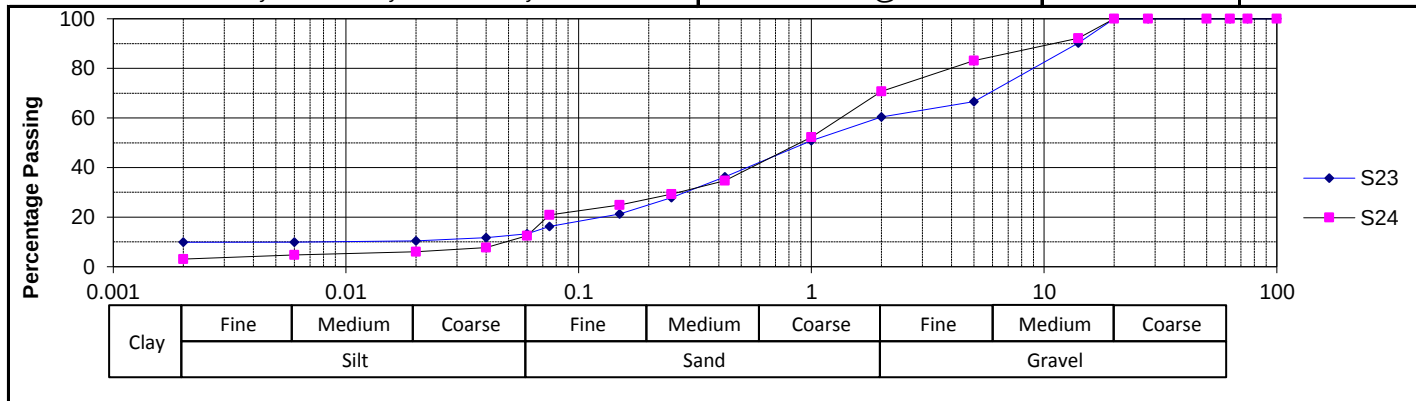


Client : CROSSMAN PAPE AND ASSOCIATES CC
 Project : Halfway House
 Project No : 2021-B-86

Date Received: 01/02/2021
 Date Reported: 16/02/2021
 Page No. : 3 of 16

FOUNDATION INDICATOR

Laboratory Number	S25	S26
Field Number	TP25	TP63
Client Reference		
Depth (m)	0.0-2.0	0.0-0.5
Position		
Coordinates	X Y	
Description		
Additional Information		
Calcrete / Crushed Stabilizing Agent		

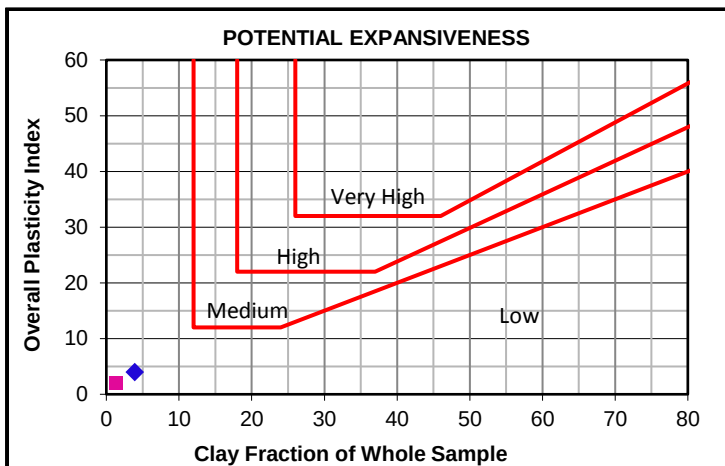


Moisture Content & Relative Density

Moisture Content (%)		
Relative Density (S.G.)		

Sieve Analysis (Wet Prep)

Percentage Passing	100 mm	100	100
	75 mm	100	100
	63 mm	100	100
	50 mm	100	87
	37.5 mm	100	65
	28 mm	100	60
	20 mm	100	57
	14 mm	93	50
	5 mm	83	42
	2 mm	70	36
	1 mm	53	30
	0.425 mm	36	22
	0.250 mm	31	19
	0.150 mm	25	17
0.075 mm	20	15	
Grading Modulus		1.74	2.27

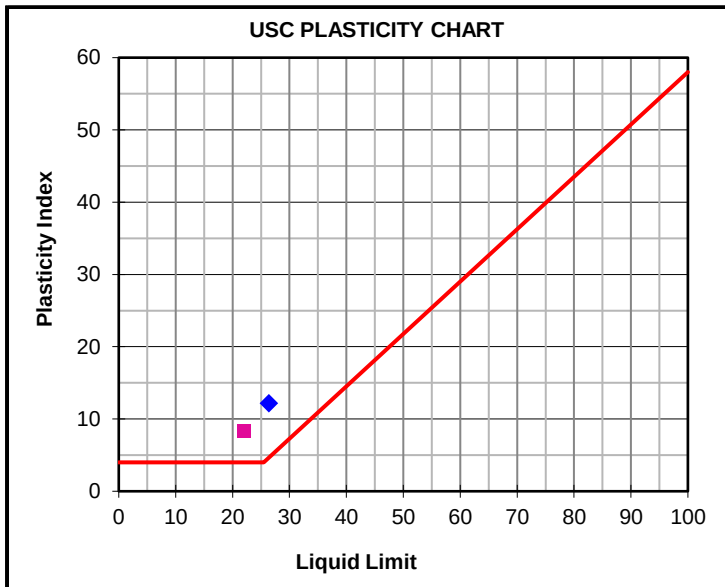

Hydrometer Analysis


Percentage Passing	0.060 mm	14	10
	0.040 mm	9	6
	0.020 mm	7	5
	0.006 mm	6	3
	0.002 mm	4	1
Gravel	%	30	64
Sand	%	56	27
Silt	%	10	8
Clay	%	4	1

Laboratory Number		S25	S26
Atterberg Limits -425µ			
Liquid Limit	%	26	22
Plasticity Index	%	12	8
Linear Shrinkage	%	4.5	3.0
Overall PI	%	4	2

Classifications

HRB (AASHTO)	A-2-6(0)	A-2-4(0)
Unified (ASTM D2487)	SC	GC
Weston Swell @ 1 kPa		

Note: An assumed S.G. may be used in Hydrometer Analysis calculations

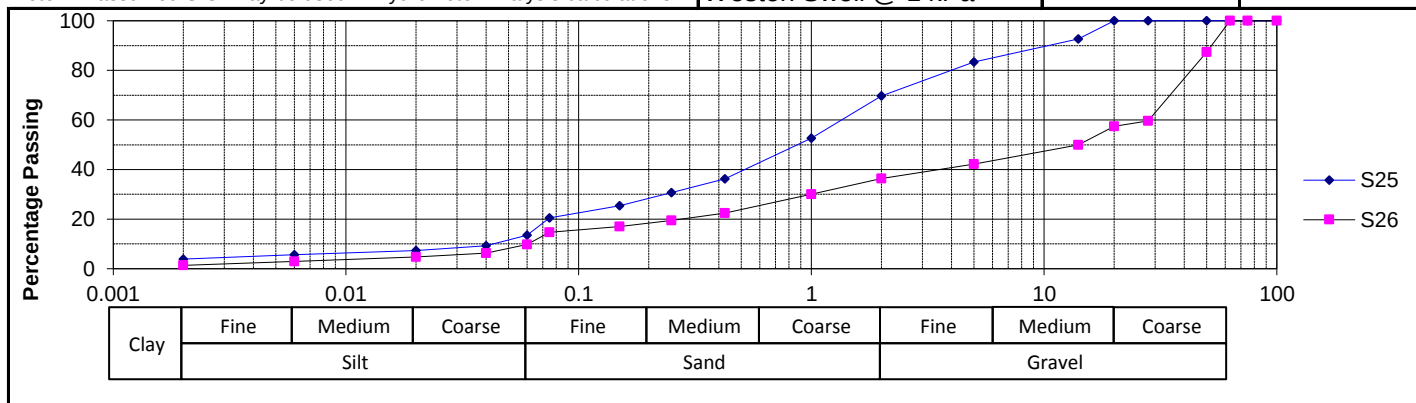


Client : CROSSMAN PAPE AND ASSOCIATES CC
 Project : Halfway House
 Project No : 2021-B-86

Date Received: 01/02/2021
 Date Reported: 16/02/2021
 Page No. : 4 of 16

FOUNDATION INDICATOR

Laboratory Number	S27	S28
Field Number	TP64	TP45
Client Reference		
Depth (m)	0.70-0.85	0.60-1.50
Position		
Coordinates	X Y	
Description		
Additional Information		
Calcrete / Crushed Stabilizing Agent		

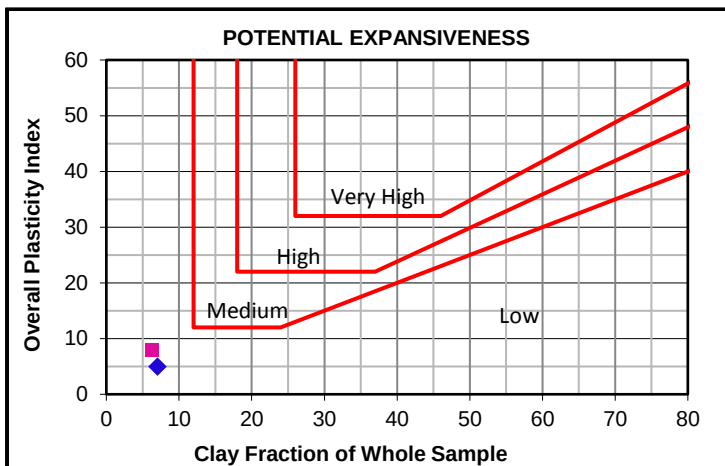


Moisture Content & Relative Density

Moisture Content (%)		
Relative Density (S.G.)		

Sieve Analysis (Wet Prep)

Percentage Passing	100 mm	100	100
	75 mm	100	100
	63 mm	100	100
	50 mm	100	100
	37.5 mm	100	100
	28 mm	100	100
	20 mm	100	100
	14 mm	92	99
	5 mm	75	90
	2 mm	65	85
	1 mm	56	69
	0.425 mm	43	45
	0.250 mm	36	37
	0.150 mm	31	31
	0.075 mm	25	26
Grading Modulus		1.67	1.45

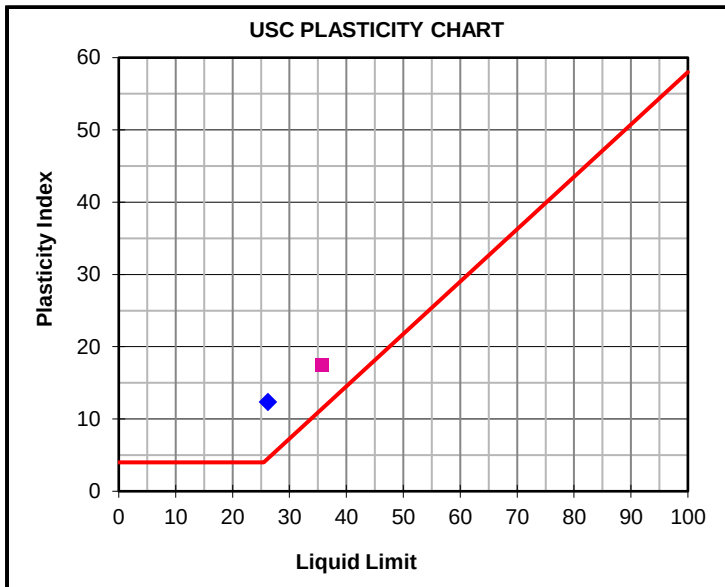

Hydrometer Analysis


Percentage Passing	0.060 mm	20	23
	0.040 mm	15	18
	0.020 mm	12	14
	0.006 mm	10	10
	0.002 mm	7	6
Gravel	%	35	15
Sand	%	45	61
Silt	%	13	17
Clay	%	7	6

Laboratory Number		S27	◆	S28	■
Atterberg Limits -425μ					
Liquid Limit	%	26		36	
Plasticity Index	%	12		17	
Linear Shrinkage	%	5.5		8.5	
Overall PI	%	5		8	

Classifications

HRB (AASHTO)	A-2-6(0)	A-2-6(1)
Unified (ASTM D2487)	SC	SC
Weston Swell @ 1 kPa		

Note: An assumed S.G. may be used in Hydrometer Analysis calculations

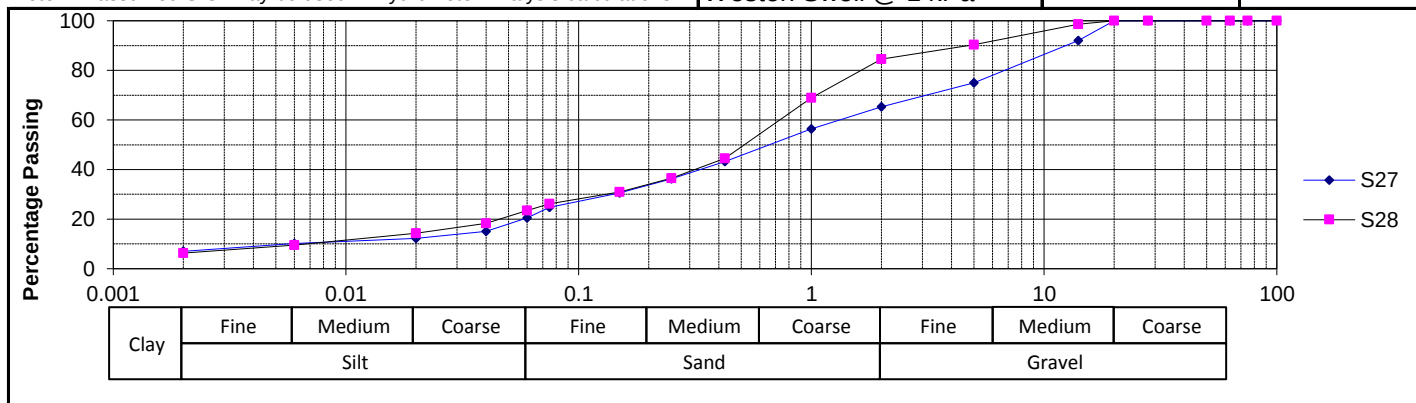


Client :
Project :
Project No :

Date Received: 01/02/2021
Date Reported: 16/02/2021
Page No. : 5 of 16

FOUNDATION INDICATOR

Laboratory Number	S29	
Field Number	TP28	
Client Reference		
Depth (m)	0.3-1.9	
Position		
Coordinates	X Y	
Description		
Additional Information		
Calcrete / Crushed Stabilizing Agent		

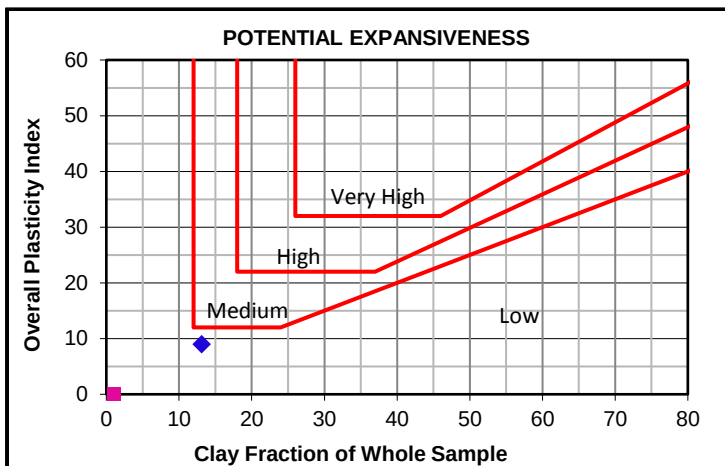


Moisture Content & Relative Density

Moisture Content (%)		
Relative Density (S.G.)		

Sieve Analysis (Wet Prep)

Percentage Passing	100 mm	100	
	75 mm	100	
	63 mm	100	
	50 mm	100	
	37.5 mm	100	
	28 mm	100	
	20 mm	100	
	14 mm	98	
	5 mm	91	
	2 mm	74	
	1 mm	61	
	0.425 mm	45	
	0.250 mm	40	
	0.150 mm	35	
0.075 mm	30		
Grading Modulus		1.51	

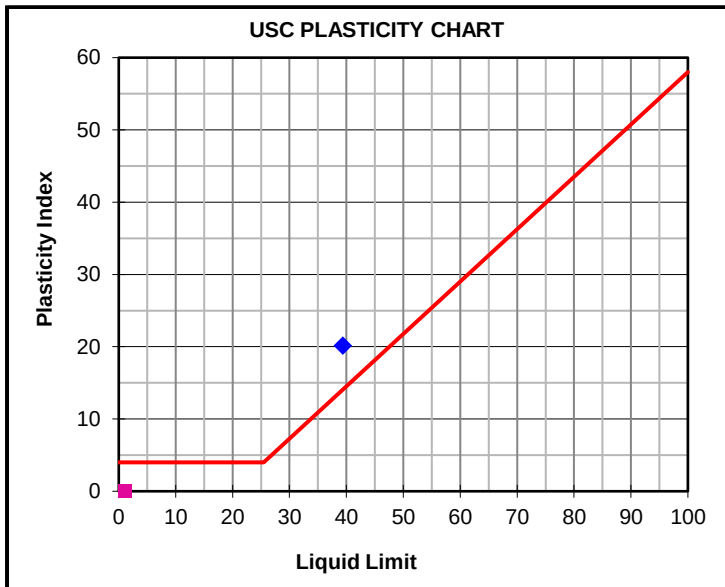

Hydrometer Analysis


Percentage Passing	0.060 mm	28	
	0.040 mm	23	
	0.020 mm	20	
	0.006 mm	16	
	0.002 mm	13	
Gravel	%	26	
Sand	%	46	
Silt	%	15	
Clay	%	13	

Laboratory Number	S29	
Atterberg Limits -425µ		
Liquid Limit	%	39
Plasticity Index	%	20
Linear Shrinkage	%	9.5
Overall PI	%	9

Classifications

HRB (AASHTO)	A-2-6(2)	
Unified (ASTM D2487)	SC	
Weston Swell @ 1 kPa		

Note: An assumed S.G. may be used in Hydrometer Analysis calculations

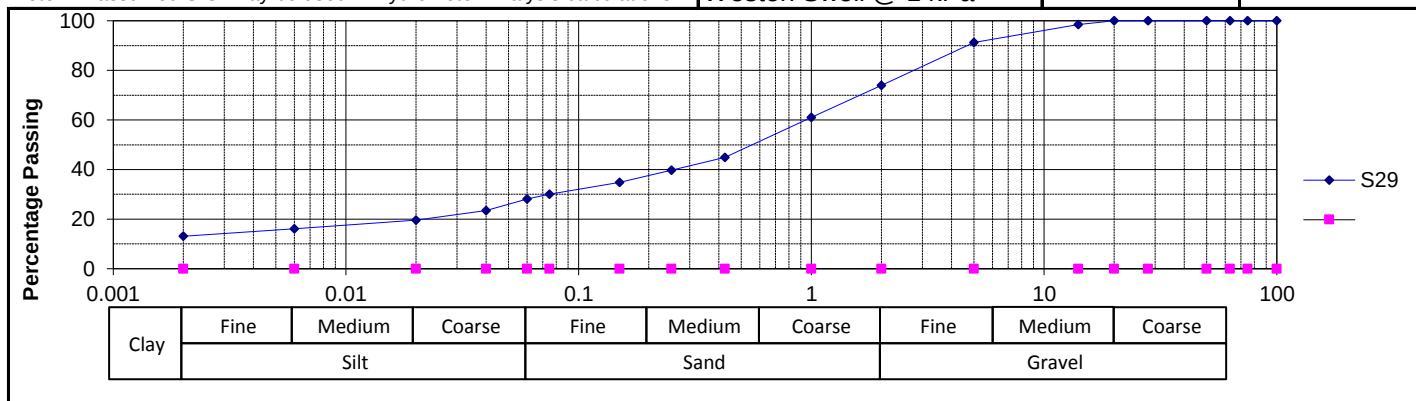

Client : CROSSMAN PAPE ASSOCIATES cc

Date Received: 01/02/2021

Project : Halfway House Water Upgrade

Date Reported: 16/02/2021

Project No: 2021-B-86

Page No. : 6 of 16

MOISTURE DENSITY RELATIONSHIP


Laboratory Number	S-23
Field Number	TP5
Client Reference	
Depth (m)	0.6-1.35
Position	
Coordinates	X
	Y
Description	
Additional Information	
% of Sample Scalped	1.2% scalped on 37.5mm
Stabilizing Agent	

Maximum Dry Density & Optimum Moisture Content - SANS 3001 GR30

Compactive Effort:	Modified AASHTO
--------------------	-----------------

Dry Density	kg/m ³	2138	2160	2135	2113	2116	
Moisture Content	%	7.1	6.1	5.1	4.1	8.1	

Max. Dry Density	kg/m ³	2160
Optimum Moisture	%	6.2

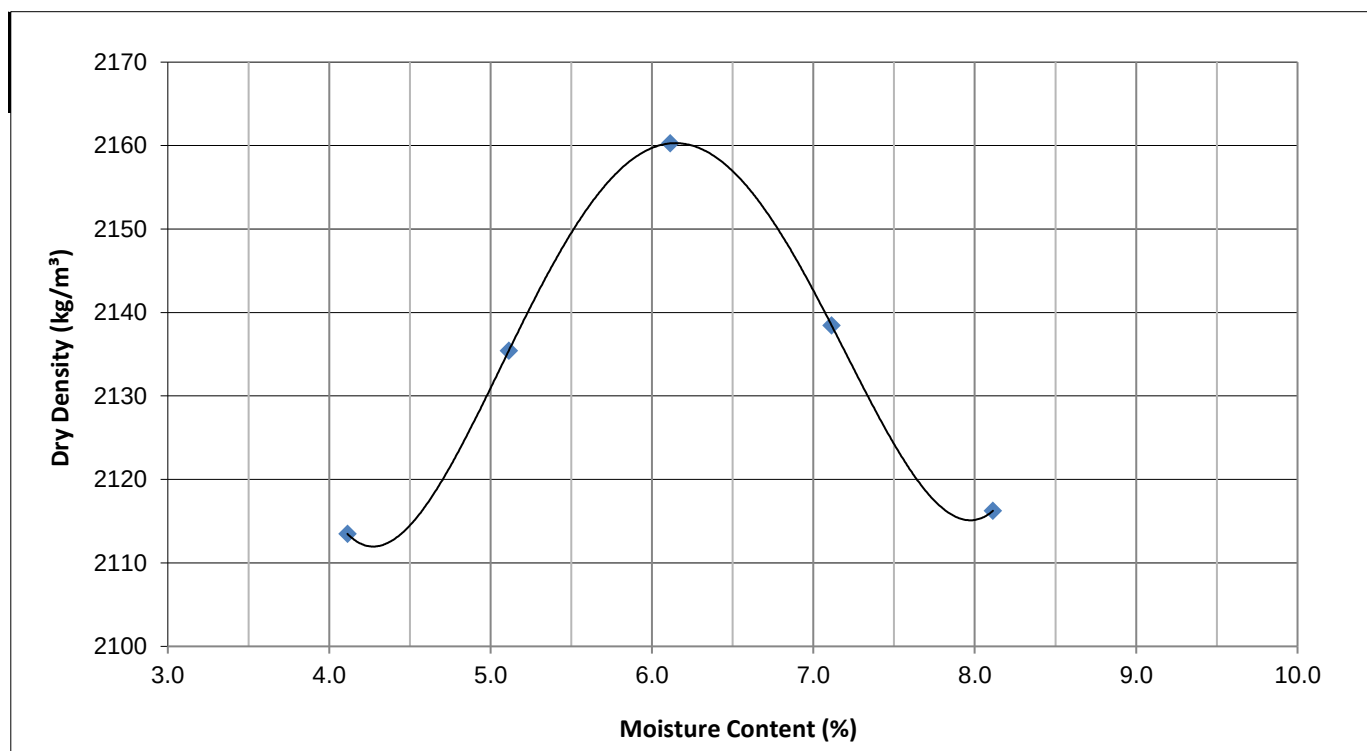

Client : CROSSMAN PAPE ASSOCIATES cc

Date Received: 01/02/2021

Project : Halfway House Water Upgrade

Date Reported: 16/02/2021

Project No: 2021-B-86

Page No. : 7 of 16

MOISTURE DENSITY RELATIONSHIP


Laboratory Number	S-24
Field Number	TP24
Client Reference	
Depth (m)	0.6-1.4
Position	
Coordinates	X
	Y
Description	
Additional Information	
% of Sample Scalped	2.5% scalped on 37.5mm
Stabilizing Agent	

Maximum Dry Density & Optimum Moisture Content - SANS 3001 GR30

Compactive Effort:	Modified AASHTO
--------------------	-----------------

Dry Density	kg/m ³	2132	2112	2108	2085	2084	
Moisture Content	%	7.0	8.0	6.0	9.0	5.0	

Max. Dry Density	kg/m ³	2132
Optimum Moisture	%	7.1

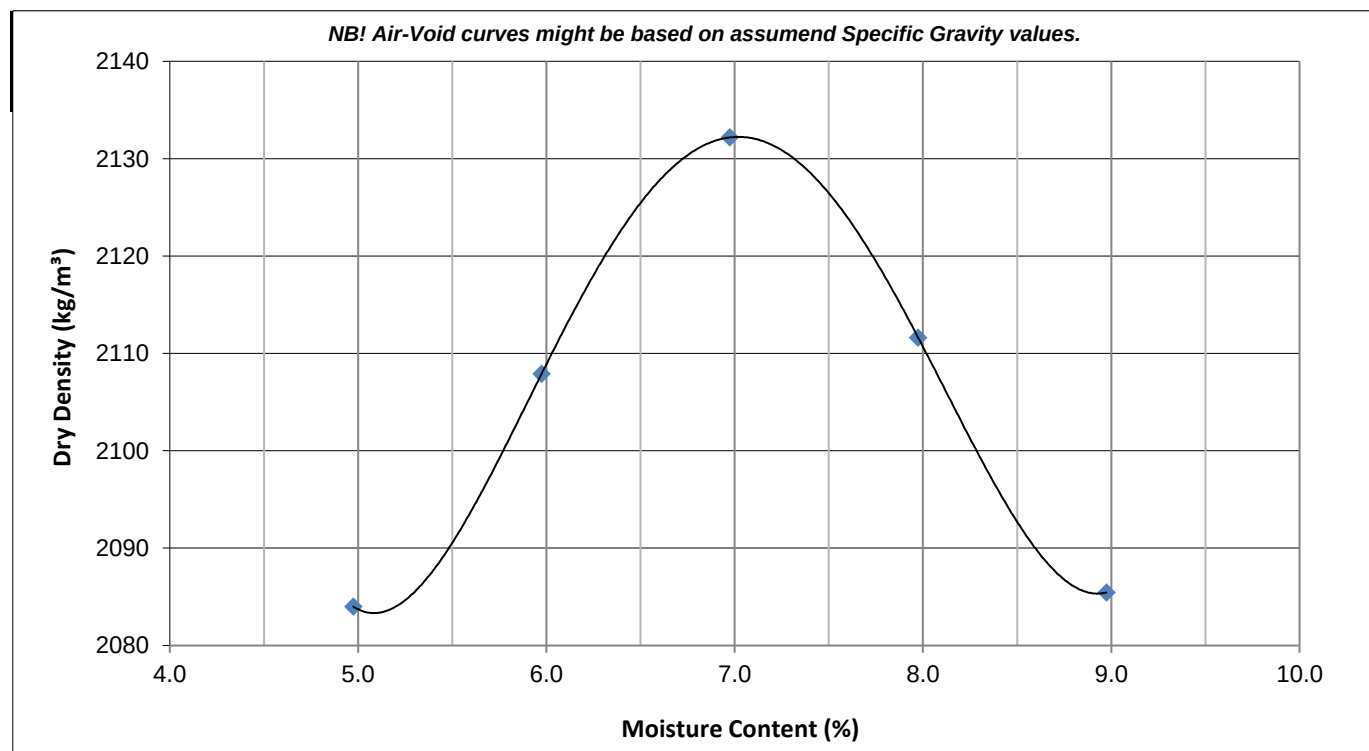

Client : CROSSMAN PAPE ASSOCIATES cc

Date Received: 01/02/2021

Project : Halfway House Water Upgrade

Date Reported: 16/02/2021

Project No: 2021-B-86

Page No. : 8 of 16

MOISTURE DENSITY RELATIONSHIP


Laboratory Number	S-25
Field Number	TP25
Client Reference	
Depth (m)	0.0-2.0
Position	
Coordinates	X
	Y
Description	
Additional Information	
% of Sample Scalped	1.2% scalped on 37.5mm
Stabilizing Agent	

Maximum Dry Density & Optimum Moisture Content - SANS 3001 GR30

Compactive Effort:	Modified AASHTO
--------------------	-----------------

Dry Density	kg/m ³	2101	2124	2104	2077	2077	
Moisture Content	%	6.2	7.2	8.2	9.2	5.2	

Max. Dry Density	kg/m ³	2124
Optimum Moisture	%	7.2

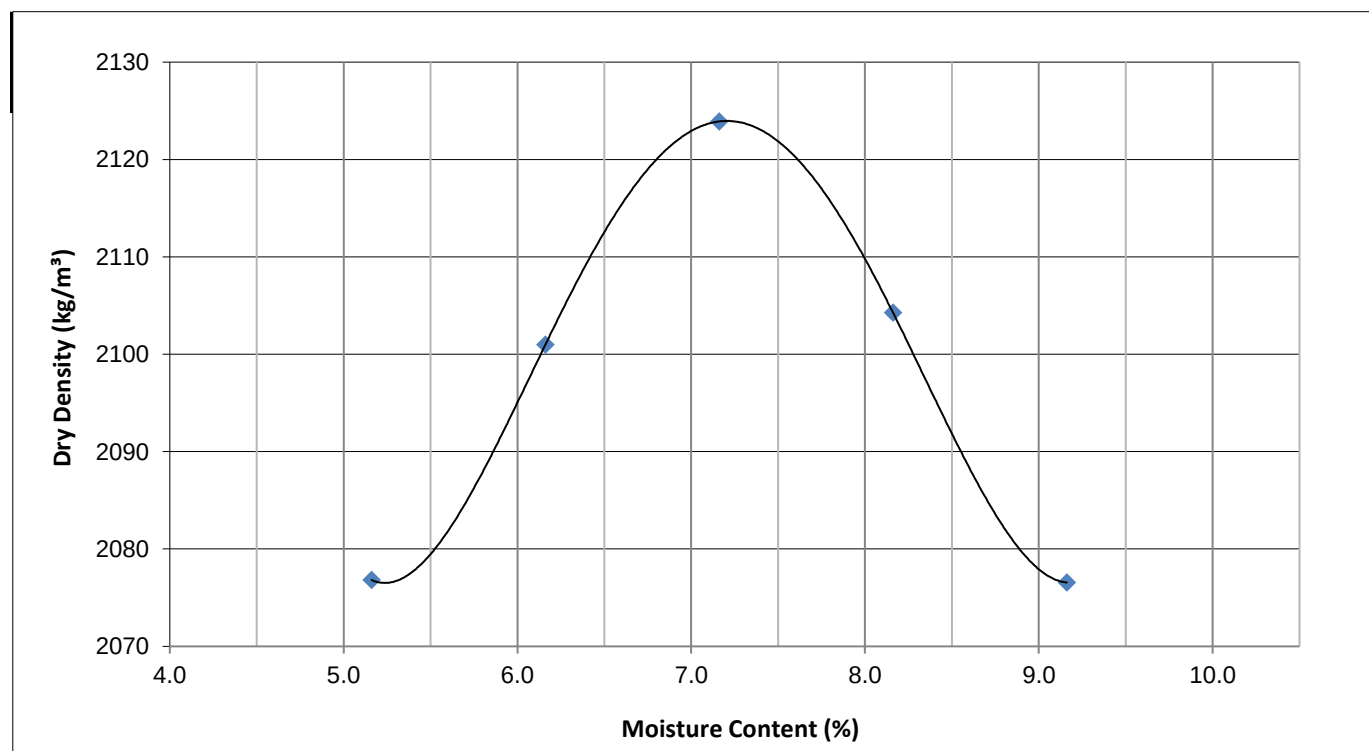

Client : CROSSMAN PAPE ASSOCIATES cc

Date Received: 01/02/2021

Project : Halfway House Water Upgrade

Date Reported: 16/02/2021

Project No: 2021-B-86

Page No. : 9 of 16

MOISTURE DENSITY RELATIONSHIP


Laboratory Number	S-26
Field Number	TP63
Client Reference	
Depth (m)	0.0-0.5
Position	
Coordinates	X
	Y
Description	
Additional Information	
% of Sample Scalped	15.7% scalped on 37.5mm
Stabilizing Agent	

Maximum Dry Density & Optimum Moisture Content - SANS 3001 GR30

Compactive Effort:	Modified AASHTO
--------------------	-----------------

Dry Density	kg/m ³	2258	2233	2281	2259	2234	
Moisture Content	%	6.1	7.1	5.1	4.1	3.1	

Max. Dry Density	kg/m ³	2281
Optimum Moisture	%	5.2

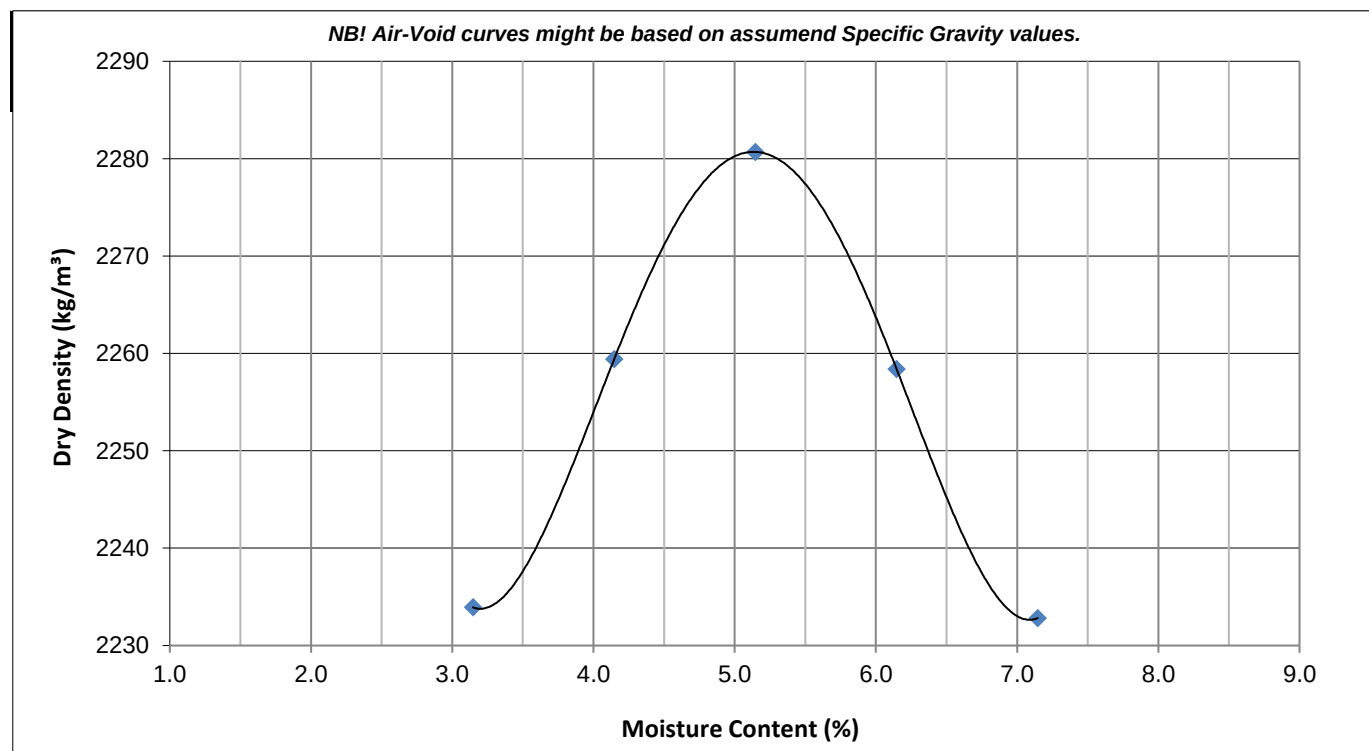

Client : CROSSMAN PAPE ASSOCIATES cc

Date Received:

Project : Halfway House Water Upgrade

Date Reported: 16/02/2021

Project No: 2021-B-86

Page No. : 10 of 16

MOISTURE DENSITY RELATIONSHIP


Laboratory Number	S-27
Field Number	TP64
Client Reference	
Depth (m)	0.7-0.85
Position	
Coordinates	X
	Y
Description	
Additional Information	
% of Sample Scalped	0% scalped on 37.5mm
Stabilizing Agent	

Maximum Dry Density & Optimum Moisture Content - SANS 3001 GR30

Compactive Effort:	Modified AASHTO
--------------------	-----------------

Dry Density	kg/m ³	2036	2057	2086	2061	2036	
Moisture Content	%	8.2	9.2	10.2	11.2	12.2	

Max. Dry Density	kg/m ³	2086
Optimum Moisture	%	10.3

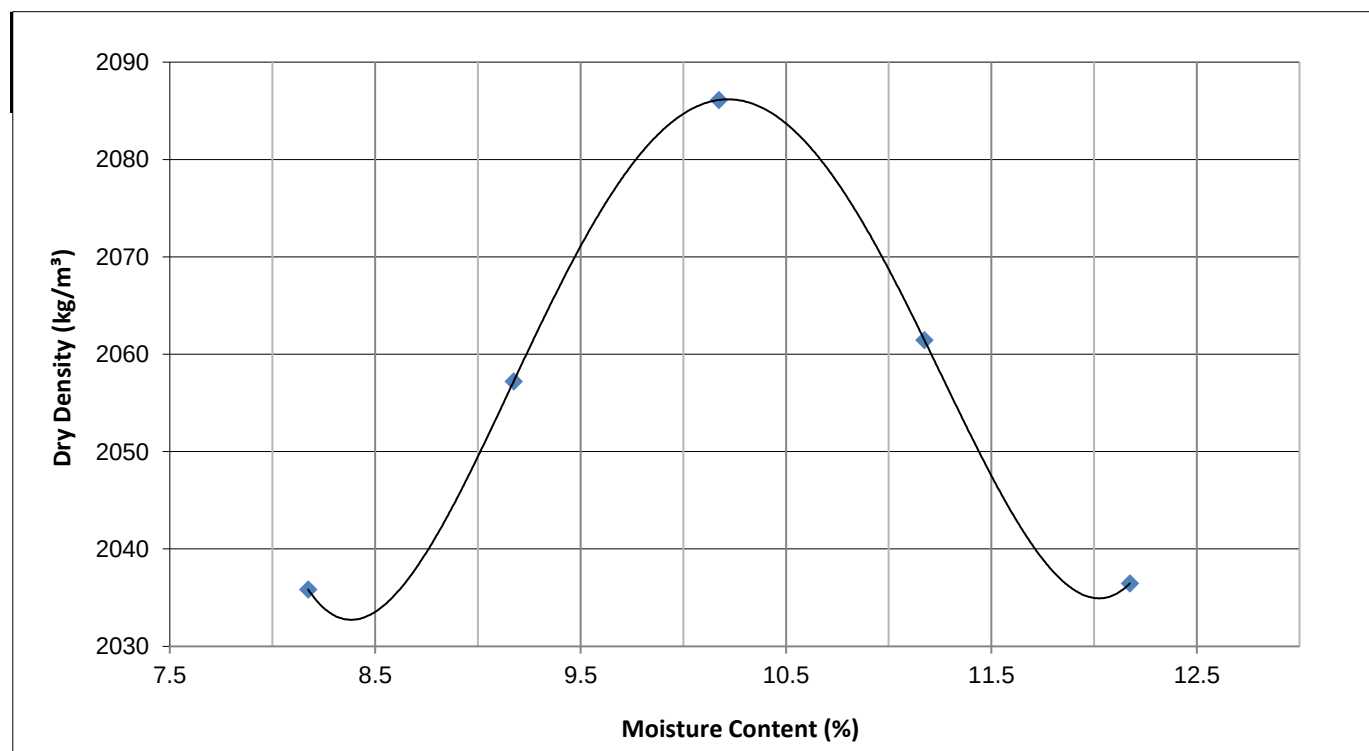

Client : CROSSMAN PAPE ASSOCIATES cc

Date Received: 01/02/2021

Project : Halfway House Water Upgrade

Date Reported: 16/02/2021

Project No: 2021-B-86

Page No. : 11 of 16

MOISTURE DENSITY RELATIONSHIP


Laboratory Number	S-28
Field Number	TP45
Client Reference	
Depth (m)	0.6-1.5
Position	
Coordinates	X
	Y
Description	
Additional Information	
% of Sample Scalped	0% scalped on 37.5mm
Stabilizing Agent	

Maximum Dry Density & Optimum Moisture Content - SANS 3001 GR30

Compactive Effort:	Modified AASHTO
--------------------	-----------------

Dry Density	kg/m ³	1910	1930	1910	1887	1886	
Moisture Content	%	12.4	11.4	10.4	9.4	13.4	

Max. Dry Density	kg/m ³	1930
Optimum Moisture	%	11.4

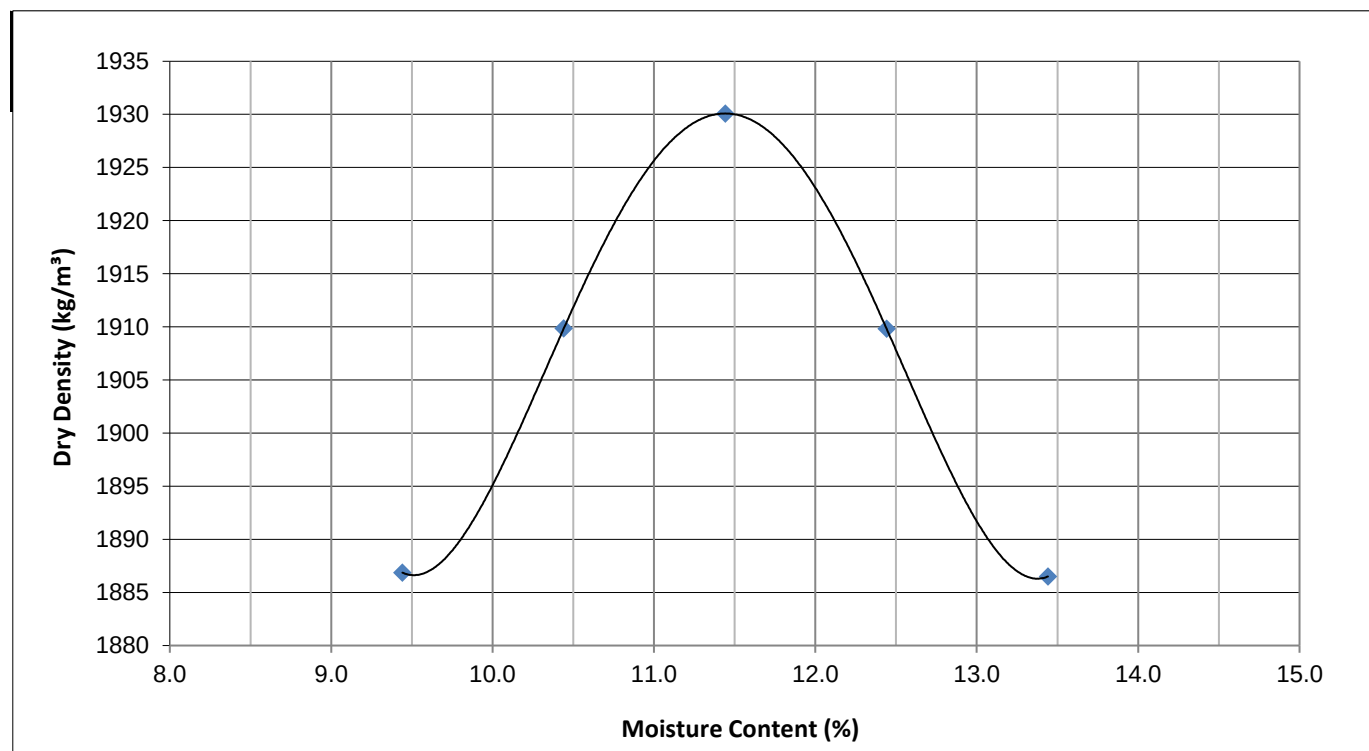

Client : CROSSMAN PAPE ASSOCIATES cc

Date Received: 01/02/2021

Project : Halfway House Water Upgrade

Date Reported: 16/02/2021

Project No: 2021-B-86

Page No. : 12 of 16

MOISTURE DENSITY RELATIONSHIP


Laboratory Number	S-29
Field Number	TP28
Client Reference	
Depth (m)	0.3-1.9
Position	
Coordinates	X
	Y
Description	
Additional Information	
% of Sample Scalped	0% scalped on 37.5mm
Stabilizing Agent	

Maximum Dry Density & Optimum Moisture Content - SANS 3001 GR30

Compactive Effort:	Modified AASHTO
--------------------	-----------------

Dry Density	kg/m ³	1821	1839	1856	1840	1814	
Moisture Content	%	14.2	13.2	12.2	11.2	10.2	

Max. Dry Density	kg/m ³	1856
Optimum Moisture	%	12.2

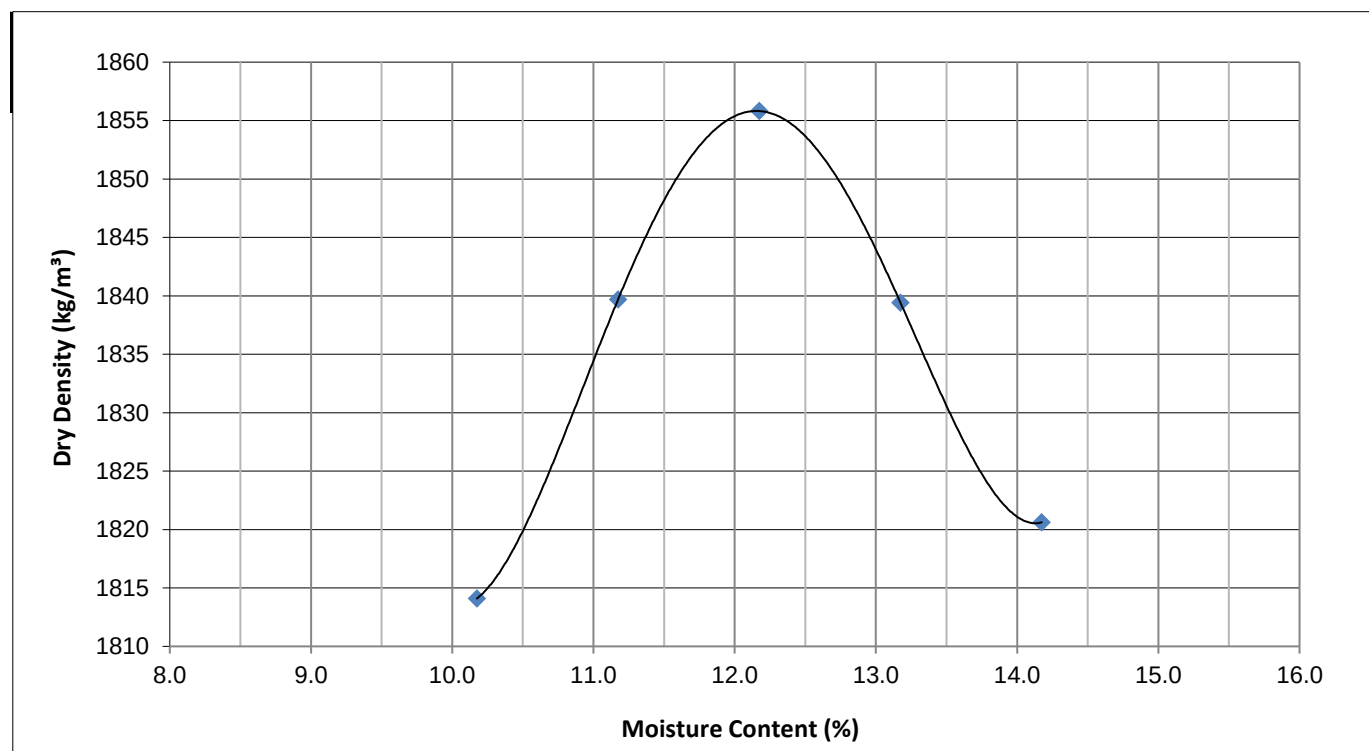

Client : CROSSMAN PAPE ASSOCIATES cc
 Project : Halfway House Water Upgrade
 Project No. : 2021-B-86

Date Received : 01/02/2021
 Date Reported : 16/02/2021
 Page No. : 13 of 16


CALIFORNIA BEARING RATIO (CBR) & ROAD INDICATOR REPORT

Laboratory No.	S-23	S-24
Field Number	TP5	TP24
Client Reference		
Depth (m)	0.6-1.35	0.6-1.4
Position		
Coordinates	X	
	Y	
Description		
Additional information		
Calcrete/Crushed		
Stabilizing Agent		

Laboratory No.	S-23	S-24
Maximum Dry Density & Optimum Moisture Content		
MDD	kg/m ³	2160
OMC	%	6.2
		2132
		7.1

California Bearing Ratio

Compaction Data						
Moisture	%	6.16436621			7.020429822	
Dry Density	kg/m ³	2192	2085	1976	2166	2054
Compaction	%	101.5	96.5	91.5	101.6	96.3
Penetration Data						
CBR at	2.54 mm	100	55	45	54	26
	5.08 mm	151	109	59	84	33
	7.62 mm	175	122	63	98	33
Swell	%	0.1	0.1	0.1	0.2	0.3
Final Moisture (%)		8.3	12.26	16.65	8.928	12.08
					14.35	

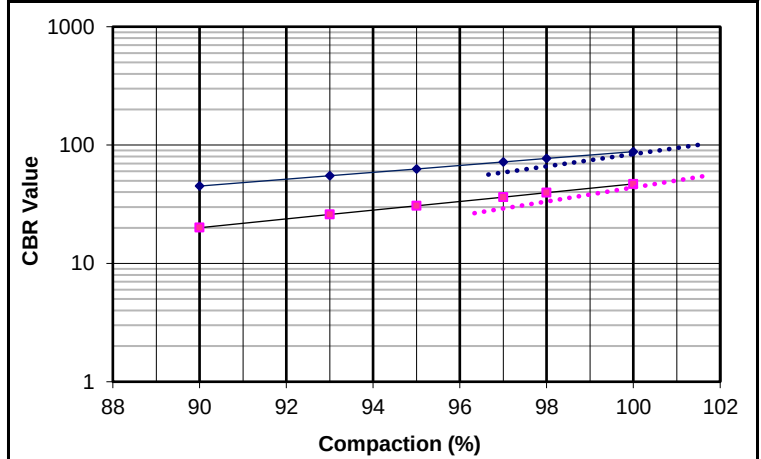


Sieve Analysis (Wet preparation)			
Percentage Passing	100 mm	100	100
	75 mm	100	100
	63 mm	100	100
	53 mm	100	100
	37.5 mm	100	100
	28 mm	100	100
	20 mm	100	100
	14 mm	90	92
	5 mm	67	83
	2 mm	60	71
	1 mm	51	52
	0.425 mm	36	35
	0.250 mm	28	29
	0.150 mm	21	25
	0.075 mm	16	21
Grading Modulus		1.87	1.74

Interpolated CBR Data			
CBR	@ 100%	88	47
	@ 98%	77	40
	@ 97%	72	36
	@ 95%	63	31
	@ 93%	55	26
	@ 90%	45	20
	@ SANS3001 Midpoint	74	38
	Mod. AASHTO		

Soil Mortar Analysis		
Coarse Sand	39	
Coarse Fine Sand	11	
Medium Fine Sand	8	
Fine Fine Sand	7	
Silt and Clay	36	

Classifications		
HRB (AASHTO)	A-2-4(0)	A-2-6(0)
COLTO	G7	G7
TRH14	G6	G6

Atterberg Limits		
Liquid Limit (%)	19	27
Plasticity Index (%)	7	12
Linear Shrinkage (%)	25.0	5.5

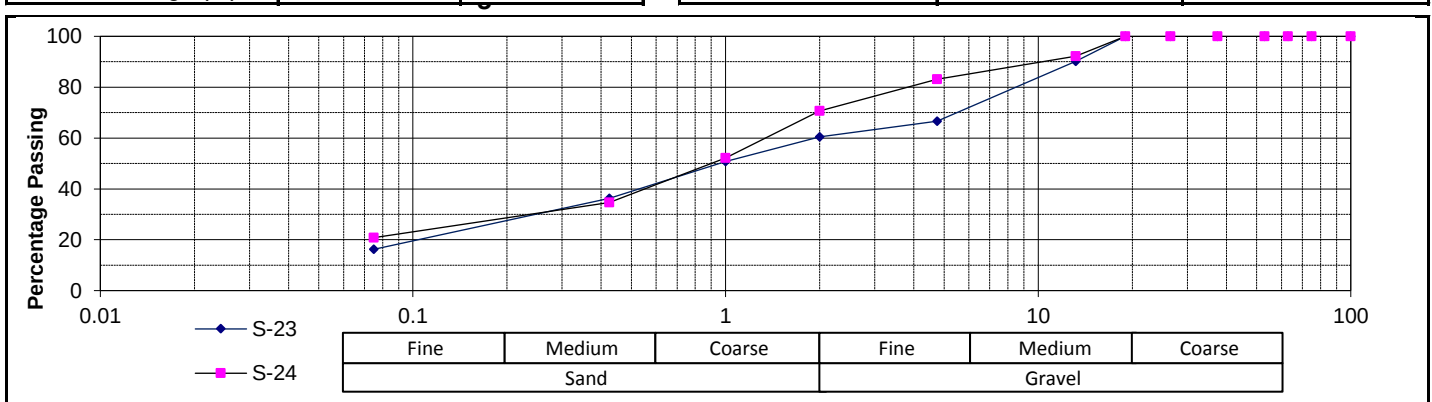

Client : CROSSMAN PAPE ASSOCIATES cc
 Project : Halfway House Water Upgrade
 Project No. : 2021-B-86

Date Received : 01/02/2021
 Date Reported : 16/02/2021
 Page No. : 14 of 16


CALIFORNIA BEARING RATIO (CBR) & ROAD INDICATOR REPORT

Laboratory No.	S-25	S26
Field Number	TP25	TP63
Client Reference		
Depth (m)	0.0-2.0	0.0-0.5
Position		
Coordinates	X	
	Y	
Description		
Additional information		
Calcrete/Crushed		
Stabilizing Agent		

Laboratory No.	S-25	S-26
Maximum Dry Density & Optimum Moisture Content		
MDD	kg/m ³	2124
OMC	%	7.2
		2281
		5.2

California Bearing Ratio

Compaction Data							
Moisture	%	7.208612314			5.119835867		
Dry Density	kg/m ³	2151	2045	1937	2315	2200	2087
Compaction	%	101.3	96.3	91.2	101.5	96.5	91.5
Penetration Data							
CBR at	2.54 mm	61	47	28	111	28	21
	5.08 mm	63	52	31	139	35	27
	7.62 mm	60	52	31	141	35	34
Swell	%	0.1	0.0	0.1	0.0	0.1	0.1
Final Moisture (%)		8.8	11.21	15.81	6.702	9.169	13.76

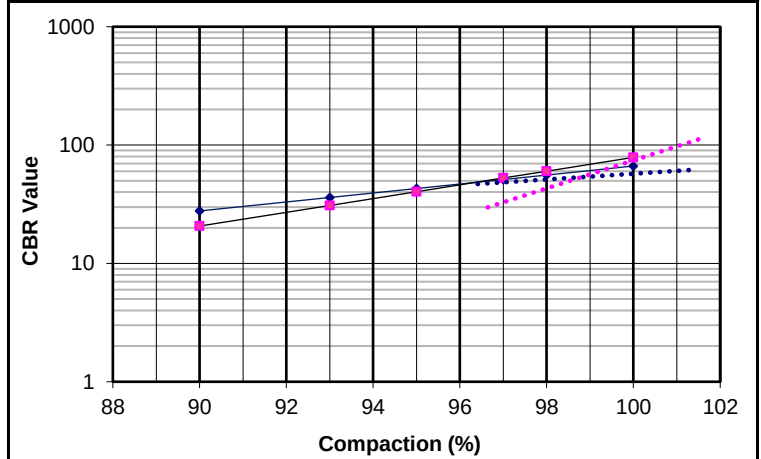

Interpolated CBR Data

@ 100%	67	79
@ 98%	56	60
@ 97%	51	53
@ 95%	43	40
@ 93%	36	31
@ 90%	28	21
@ SANS3001 Midpoint	54	56

Classifications

HRB (AASHTO)	A-2-6(0)	A-2-4(0)
COLTO	G6	G6
TRH14	G6	G6

Sieve Analysis (Wet preparation)


100 mm	100	100
75 mm	100	100
63 mm	100	100
53 mm	100	87
37.5 mm	100	65
28 mm	100	60
20 mm	100	57
14 mm	93	50
5 mm	83	42
2 mm	70	36
1 mm	53	30
0.425 mm	36	22
0.250 mm	31	19
0.150 mm	25	17
0.075 mm	20	15
Grading Modulus	1.74	2.27

Soil Mortar Analysis

Coarse Sand	40	51
Coarse Fine Sand	14	8
Medium Fine Sand	11	6
Fine Fine Sand	8	6
Silt and Clay	27	30

Atterberg Limits

Liquid Limit (%)	26	22
Plasticity Index (%)	12	8
Linear Shrinkage (%)	4.5	3.0

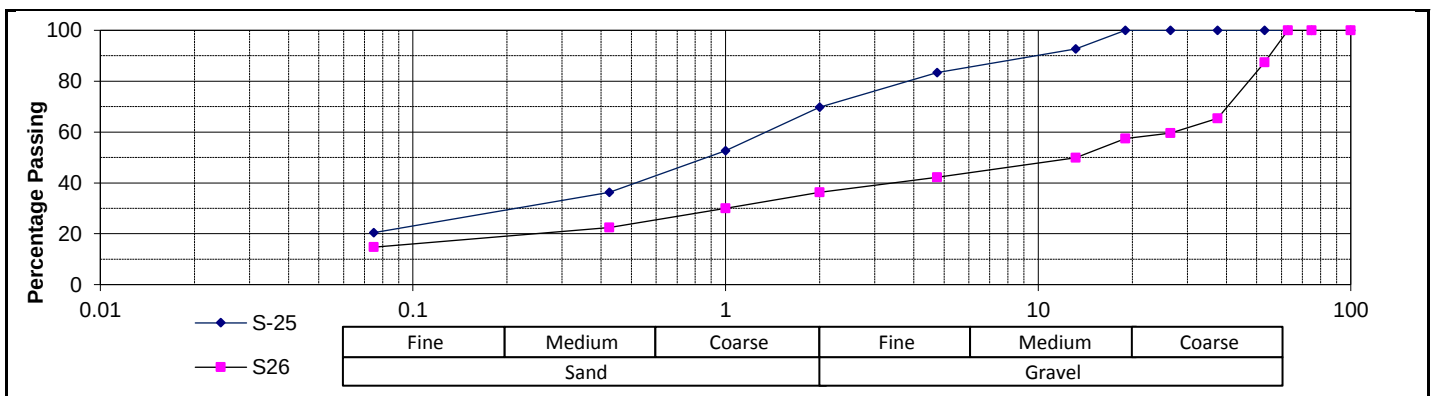

Client : CROSSMAN PAPE ASSOCIATES cc
 Project : Halfway House Water Upgrade
 Project No. : 2021-B-86

Date Received : 01/02/2021
 Date Reported : 16/02/2021
 Page No. : 15 of 16


CALIFORNIA BEARING RATIO (CBR) & ROAD INDICATOR REPORT

Laboratory No.	S-27	S-28
Field Number	TP64	TP45
Client Reference		
Depth (m)	0.7-0.85	0.6-1.5
Position		
Coordinates	X	
	Y	
Description		
Additional information		
Calcrete/Crushed		
Stabilizing Agent		

Laboratory No.	S-27	S28
Maximum Dry Density & Optimum Moisture Content		
MDD	kg/m ³	2086
OMC	%	10.3
		1930
		11.4

California Bearing Ratio

Compaction Data						
Moisture	%	10.24470388			11.15854382	
Dry Density	kg/m ³	2103	2002	1898	1938	1842
Compaction	%	100.8	95.9	91.0	100.4	95.5
Penetration Data						
CBR at	2.54 mm	21	20	10	53	25
	5.08 mm	28	22	11	48	25
	7.62 mm	31	23	12	41	22
Swell	%	0.2	0.2	0.3	0.3	0.3
Final Moisture (%)		11.9	13.92	17.94	13.09	15.36
					19.41	

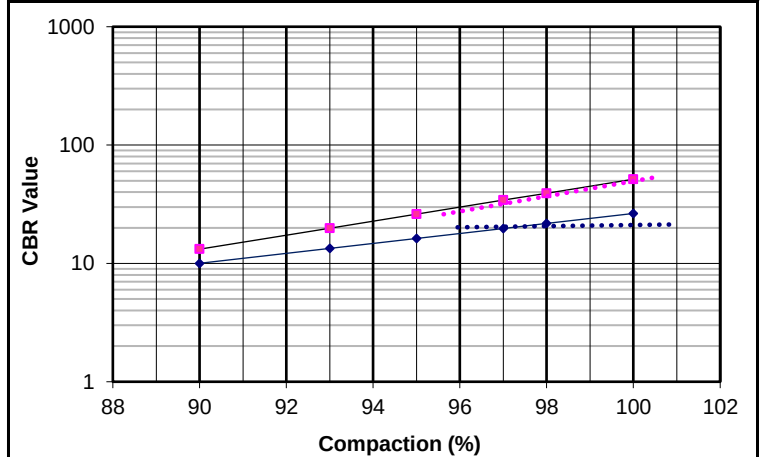


Sieve Analysis (Wet preparation)		
Percentage Passing		
100 mm	100	100
75 mm	100	100
63 mm	100	100
53 mm	100	100
37.5 mm	100	100
28 mm	100	100
20 mm	100	100
14 mm	92	99
5 mm	75	90
2 mm	65	85
1 mm	56	69
0.425 mm	43	45
0.250 mm	36	37
0.150 mm	31	31
0.075 mm	25	26
Grading Modulus	1.67	1.45

Interpolated CBR Data		
CBR	@ 100%	26
	@ 98%	22
	@ 97%	20
	@ 95%	16
	@ 93%	13
	@ 90%	10
	@ SANS3001 Midpoint	21
		51
		39
		34
		26
		20
		13
		37

Soil Mortar Analysis		
Coarse Sand	49	39
Coarse Fine Sand	8	8
Medium Fine Sand	8	7
Fine Fine Sand	7	6
Silt and Clay	29	40

Classifications		
HRB (AASHTO)	A-2-6(0)	A-2-6(1)
COLTO	G8	
TRH14	G8	G8

Atterberg Limits		
Liquid Limit (%)	26	37
Plasticity Index (%)	12	17
Linear Shrinkage (%)	4.5	8.5

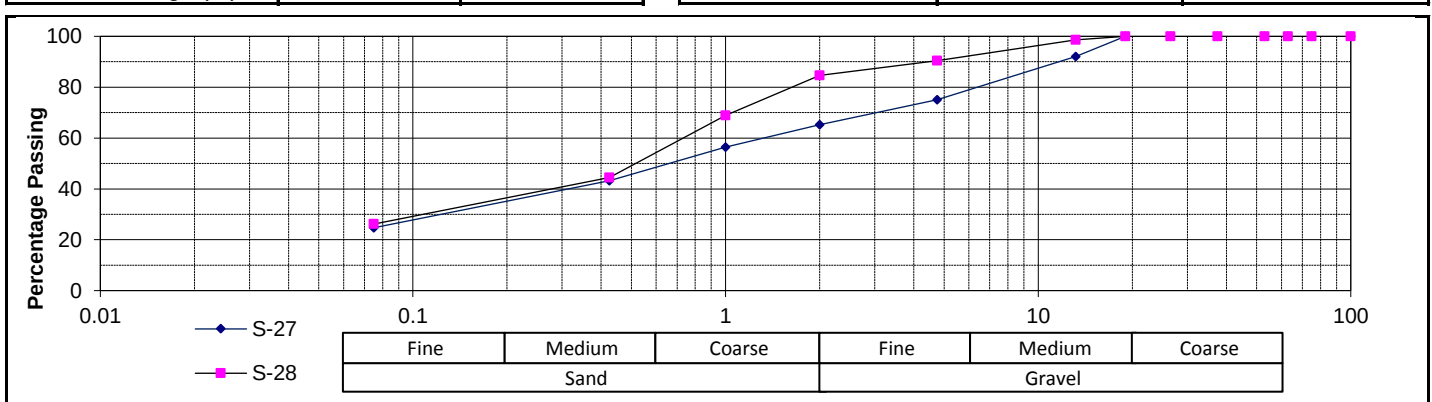

Client : CROSSMAN PAPE ASSOCIATES cc
 Project : Halfway House Water Upgrade
 Project No. : 2021-B-86

Date Received : 01/02/2021
 Date Reported : 16/02/2021
 Page No. : 16 of 16

CALIFORNIA BEARING RATIO (CBR) & ROAD INDICATOR REPORT

Laboratory No.	S-29	
Field Number	TP28	
Client Reference		
Depth (m)	0.3-1.9	
Position		
Coordinates	X	
	Y	
Description		
Additional information		
Calcrete/Crushed		
Stabilizing Agent		

Sieve Analysis (Wet preparation)

Percentage Passing	100 mm	100
	75 mm	100
	63 mm	100
	53 mm	100
	37.5 mm	100
	28 mm	100
	20 mm	100
	14 mm	98
	5 mm	91
	2 mm	74
	1 mm	61
	0.425 mm	45
	0.250 mm	40
	0.150 mm	35
	0.075 mm	30
Grading Modulus	1.51	

Soil Mortar Analysis

Coarse Sand	39	
Coarse Fine Sand	11	
Medium Fine Sand	8	
Fine Fine Sand	7	
Silt and Clay	36	


Atterberg Limits

Liquid Limit (%)	39	
Plasticity Index (%)	20	
Linear Shrinkage (%)	9.5	

Laboratory No.	S-29	
Maximum Dry Density & Optimum Moisture Content		
MDD	kg/m ³	1856
OMC	%	12.2

California Bearing Ratio

Compaction Data					
Moisture	%	12.26891312			
Dry Density	kg/m ³	1882	1772	1692	
Compaction	%	101.4	95.5	91.2	
Penetration Data					
CBR at	2.54 mm	4	2	1	
	5.08 mm	4	2	2	
	7.62 mm	4	2	2	
Swell	%	2.3	2.9	3.7	
Final Moisture (%)		16.1	18.86	24.53	

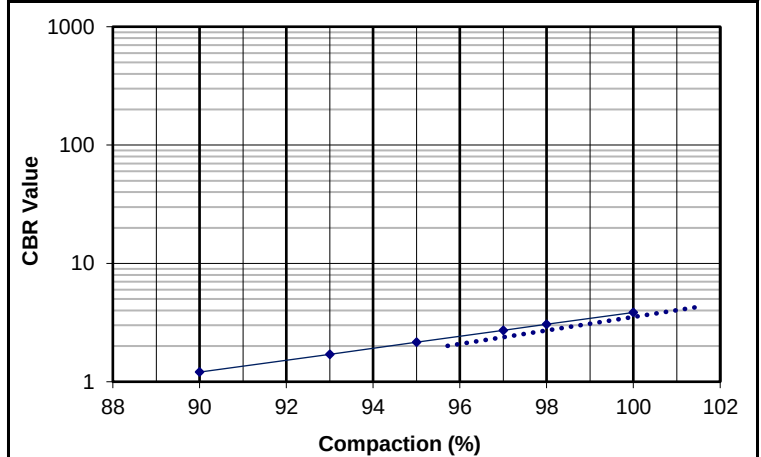


Interpolated CBR Data

CBR	@ 100%	Mod. AASHTO	4	
	@ 98%		3	
	@ 97%		3	
	@ 95%		2	
	@ 93%		2	
	@ 90%		1	
	@ SANS3001 Midpoint		3	

Classifications

HRB (AASHTO)	A-2-6(2)	
COLTO		
TRH14		G8

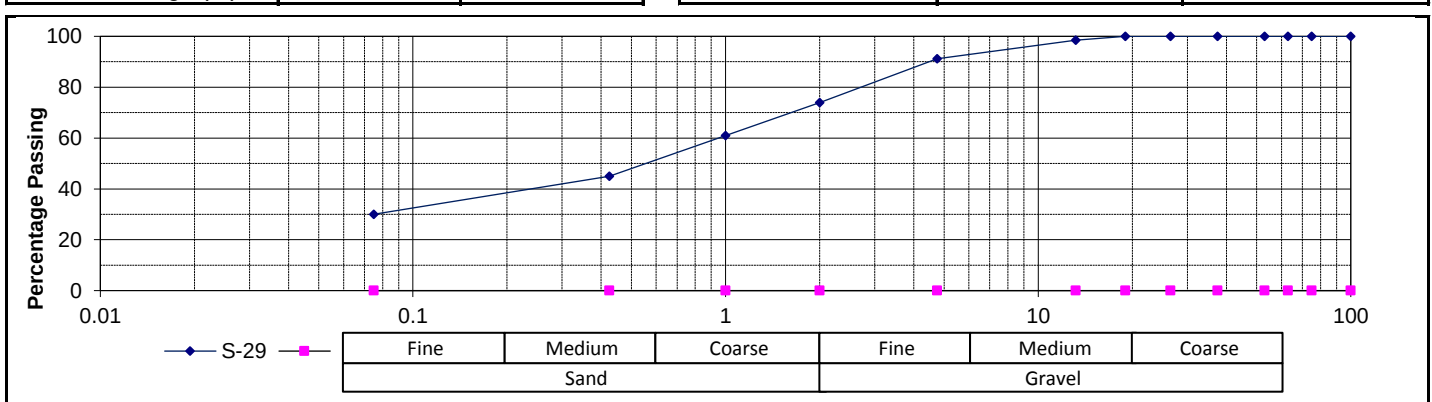

CERTIFICATE OF ANALYSES
BASSON INDEX

Date received: 2021-01-26
Project number: 1000

Report number: 97570

Date completed: 2021-02-10
Order number:

Client name: Crossman Pape & Associates
Address: 7 Manor Close, Norscot Manor, Douglasdale, Jhb
Telephone: 011 465 1699

Contact person: Warren Kretzinger
Email: warren@crossmanpape.co.za
Cell: 083 324 4371

Analyses in mg/l (Unless specified otherwise)	Sample Identification:	
	TP3 (0.5-1.3)	TP6 (0.6-1.35)
Sample Number	117189	117190
pH Value at 25°C	4.0	4.4
pHs Value at 20°C (calc)	10.0	9.7
Electrical Conductivity in mS/m at 25°C	13.5	13.4
Total Dissolved Solids* (calc)	90	90
Total Alkalinity as CaCO ₃	8	8
Total Hardness as CaCO ₃ (calc)	25	39
Calcium Hardness as CaCO ₃ (calc)	12	22
Calcium as Ca	5	9
Magnesium as Mg	3	4
Free & Saline Ammonia	<0.1	<0.1
Ammonium as NH ₄ (calc)	<0.3	<0.3
Sulphate as SO ₄	29	39
Chloride as Cl	7	5
Langelier Index at 20°C (calc)	-6.0	-5.3
Ryznar Index at 20°C (calc)	16.0	15.1
Corrosivity Ratio (calc)	5.0	6.0
Leaching Index [LCSI] (calc)	4712	4241
Spalling Index [SCSI] (calc)	4	5
Aggressiveness Index [N _c] (calc)	4716	4246

*TDS Calculated EC X 6.7
2:1 Distilled Water : Soil Extract

S. Laubscher
Assistant Geochemistry Project Manager

The information contained in this report is relevant only to the sample/samples supplied to **WATERLAB (Pty) Ltd**. Any further use of the above information is not the responsibility or liability of **WATERLAB (Pty) Ltd**. Except for the full report, parts of this report may not be reproduced without written approval of **WATERLAB (Pty) Ltd**.

CERTIFICATE OF ANALYSES
BASSON INDEX

Date received: 2021-01-26
Project number: 1000

Report number: 97570

Date completed: 2021-02-10
Order number:

Client name: Crossman Pape & Associates
Address: 7 Manor Close, Norscot Manor, Douglasdale, Jhb
Telephone: 011 465 1699

Contact person: Warren Kretzinger
Email: warren@crossmanpape.co.za
Cell: 083 324 4371

Analyses in mg/l (Unless specified otherwise)	Sample Identification:	
	TP24 (0.6-1.4)	TP63 (0.0-0.5)
Sample Number	117191	117192
pH Value at 25°C	7.9	8.0
pHs Value at 20°C (calc)	8.5	8.2
Electrical Conductivity in mS/m at 25°C	15.8	25.1
Total Dissolved Solids* (calc)	106	168
Total Alkalinity as CaCO ₃	56	76
Total Hardness as CaCO ₃ (calc)	62	117
Calcium Hardness as CaCO ₃ (calc)	50	80
Calcium as Ca	20	32
Magnesium as Mg	3	9
Free & Saline Ammonia	<0.1	<0.1
Ammonium as NH ₄ (calc)	<0.3	<0.3
Sulphate as SO ₄	12	30
Chloride as Cl	2	2
Langelier Index at 20°C (calc)	-0.6	-0.2
Ryznar Index at 20°C (calc)	9.2	8.4
Corrosivity Ratio (calc)	0.3	0.4
Leaching Index [LCSI] (calc)	864	558
Spalling Index [SCSI] (calc)	2	5
Aggressiveness Index [N _c] (calc)	866	563

*TDS Calculated EC X 6.7
2:1 Distilled Water : Soil Extract

S. Laubscher
Assistant Geochemistry Project Manager

The information contained in this report is relevant only to the sample/samples supplied to **WATERLAB (Pty) Ltd**. Any further use of the above information is not the responsibility or liability of **WATERLAB (Pty) Ltd**. Except for the full report, parts of this report may not be reproduced without written approval of **WATERLAB (Pty) Ltd**.

CERTIFICATE OF ANALYSES
BASSON INDEX

Date received: 2021-01-26
Project number: 1000

Report number: 97570

Date completed: 2021-02-10
Order number:

Client name: Crossman Pape & Associates
Address: 7 Manor Close, Norscot Manor, Douglasdale, Jhb
Telephone: 011 465 1699

Contact person: Warren Kretzinger
Email: warren@crossmanpape.co.za
Cell: 083 324 4371

Analyses in mg/l (Unless specified otherwise)	Sample Identification:	
	TP64 (0.7-0.85)	TP5 (0.0-0.7)
Sample Number	117193	117194
pH Value at 25°C	5.0	5.3
pHs Value at 20°C (calc)	10.0	9.6
Electrical Conductivity in mS/m at 25°C	6.2	16.1
Total Dissolved Solids* (calc)	42	108
Total Alkalinity as CaCO ₃	8	8
Total Hardness as CaCO ₃ (calc)	18	44
Calcium Hardness as CaCO ₃ (calc)	10	27
Calcium as Ca	4	11
Magnesium as Mg	2	4
Free & Saline Ammonia	<0.1	<0.1
Ammonium as NH ₄ (calc)	<0.3	<0.3
Sulphate as SO ₄	19	21
Chloride as Cl	<2	5
Langelier Index at 20°C (calc)	-5.0	-4.3
Ryznar Index at 20°C (calc)	15.1	14.0
Corrosivity Ratio (calc)	2.8	3.6
Leaching Index [LCSI] (calc)	4022	3524
Spalling Index [SCSI] (calc)	3	3
Aggressiveness Index [N _c] (calc)	4025	3528

*TDS Calculated EC X 6.7
2:1 Distilled Water : Soil Extract

S. Laubscher
Assistant Geochemistry Project Manager

The information contained in this report is relevant only to the sample/samples supplied to **WATERLAB (Pty) Ltd**. Any further use of the above information is not the responsibility or liability of **WATERLAB (Pty) Ltd**. Except for the full report, parts of this report may not be reproduced without written approval of **WATERLAB (Pty) Ltd**.

CERTIFICATE OF ANALYSES
BASSON INDEX

Date received: 2021-01-26
Project number: 1000

Report number: 97570

Date completed: 2021-02-10
Order number:

Client name: Crossman Pape & Associates
Address: 7 Manor Close, Norscot Manor, Douglasdale, Jhb
Telephone: 011 465 1699

Contact person: Warren Kretzinger
Email: warren@crossmanpape.co.za
Cell: 083 324 4371

Analyses in mg/l (Unless specified otherwise)	Sample Identification:
	TP28 (0.3-1.9)
Sample Number	117195
pH Value at 25°C	5.9
pHs Value at 20°C (calc)	9.1
Electrical Conductivity in mS/m at 25°C	21.3
Total Dissolved Solids* (calc)	143
Total Alkalinity as CaCO ₃	28
Total Hardness as CaCO ₃ (calc)	52
Calcium Hardness as CaCO ₃ (calc)	27
Calcium as Ca	11
Magnesium as Mg	6
Free & Saline Ammonia	<0.1
Ammonium as NH ₄ (calc)	<0.3
Sulphate as SO ₄	42
Chloride as Cl	<2
Langelier Index at 20°C (calc)	-3.2
Ryznar Index at 20°C (calc)	12.3
Corrosivity Ratio (calc)	1.7
Leaching Index [LCSI] (calc)	2730
Spalling Index [SCSI] (calc)	6
Aggressiveness Index [N _c] (calc)	2736

*TDS Calculated EC X 6.7

2:1 Distilled Water : Soil Extract

Important notes (see table for corrections on p. 6):

1. The above aggressiveness index is only applicable for conditions of laminar flow at a mean annual temperature of 20°C.
2. For stagnant/turbulent conditions the aggressiveness index must be corrected.
3. For wet/dry cycling conditions (for example in tidal zones) the aggressiveness index must be corrected.
4. For mean annual temperatures lower/higher than 20°C the aggressiveness index must be corrected.

S. Laubscher
Assistant Geochemistry Project Manager

The information contained in this report is relevant only to the sample/samples supplied to **WATERLAB (Pty) Ltd**. Any further use of the above information is not the responsibility or liability of **WATERLAB (Pty) Ltd**. Except for the full report, parts of this report may not be reproduced without written approval of **WATERLAB (Pty) Ltd**.

CERTIFICATE OF ANALYSES
BASSON INDEX

Date received: 2021-01-26
Project number: 1000

Report number: 97570

Date completed: 2021-02-10
Order number:

Client name: Crossman Pape & Associates
Address: 7 Manor Close, Norscot Manor, Douglasdale, Jhb
Telephone: 011 465 1699

Contact person: Warren Kretzinger
Email: warren@crossmanpape.co.za
Cell: 083 324 4371

Guidelines for assessing overall aggressiveness (N_c):

N_c	Aggressiveness
Not greater than 300	None to mild
400-700	Mild to moderate
800-1000	High
= or > 1 100	Very high

Aggressiveness Towards Concrete and Fibre Cement Pipes			
Index	Aggressive	Neutral	Non- Aggressive
a) Stability pH (pHs)	>pH	= pH	<pH
b) Langelier Index	Neg. Value	Zero	Pos. Value
c) Ryznar Index	>7.5	6-7	<6

Corrosiveness Towards metals	
Corrosivity	>0.2

Sample Name	Sample Number	Corrosivity Indices	Basson Index
TP3 (0.5-1.3)	117189	Corrosive	Aggressive
TP6 (0.6-1.35)	117190	Corrosive	Aggressive
TP24 (0.6-1.4)	117191	Corrosive	Aggressive
TP63 (0.0-0.5)	117192	Corrosive	Aggressive
TP64 (0.7-0.85)	117193	Corrosive	Aggressive
TP5 (0.0-0.7)	117194	Corrosive	Aggressive
TP28 (0.3-1.9)	117195	Corrosive	Aggressive

S. Laubscher
Assistant Geochemistry Project Manager

The information contained in this report is relevant only to the sample/samples supplied to **WATERLAB (Pty) Ltd**. Any further use of the above information is not the responsibility or liability of **WATERLAB (Pty) Ltd**. Except for the full report, parts of this report may not be reproduced without written approval of **WATERLAB (Pty) Ltd**.



WATERLAB (Pty) Ltd

Reg. No.: 1983/009165/07

V.A.T. No.: 4130107891

23B De Havilland Crescent
Perseus Techno Park,
Meiring Naudé Road, Pretoria
P.O. Box 283, 0020

Telephone: +2712 – 349 – 1066
Facsimile: +2712 – 349 – 2064
Email: accounts@waterlab.co.za

CERTIFICATE OF ANALYSES BASSON INDEX

Date received: 2021-01-26
Project number: 1000

Report number: 97570

Date completed: 2021-02-10
Order number:

Client name: Crossman Pape & Associates
Address: 7 Manor Close, Norscot Manor, Douglasdale, Jhb
Telephone: 011 465 1699

Contact person: Warren Kretzinger
Email: warren@crossmanpape.co.za
Cell: 083 324 4371

To correct for:	Multiply	By: (see Notes 2 to 5 below)
Turbulence	LCSI	1.75
Stagnance	LCSI	0.5
Temperature	LCSI, SCSi, N7 Where N7=0.2 x CI in mg/l	(1+ [0.05 x (T-20)])
Wet-dry cycles	SCSi	$0.23 \times 10^{-6} \times \text{TDS} \times \text{DTF} \times \text{CPA}$ Where: DTF = Dry Time Fraction CPA = wet-dry cycles per annum

Note 1: Only if the concrete contains embedded steel.

Note 2: To preserve the correct logical relationships when dealing with the negative sub indices (ie LCSI or SCSi having minus values) they should be multiplied by the reciprocal of the relevant factor indicated in this column

Note 3: If more than one correction is required, multiply by the product of the individual correction factors

Note 4: Use subscript c to indicate that the index has been corrected, eg for turbulent conditions $\text{LCSI}_c = \text{LCSI} \times 1.75$

Note 5: Round off corrected indices to the nearest 100.

S. Laubscher
Assistant Geochemistry Project Manager

The information contained in this report is relevant only to the sample/samples supplied to **WATERLAB (Pty) Ltd**. Any further use of the above information is not the responsibility or liability of **WATERLAB (Pty) Ltd**. Except for the full report, parts of this report may not be reproduced without written approval of **WATERLAB (Pty) Ltd**.

CERTIFICATE OF ANALYSES
DIN 50 929

Date received: 2021-01-26
Project number: 1000

Report number: 97570

Date completed: 2021-02-15
Order number:

Client name: Crossman Pape & Associates
Address: 7 Manor Close, Norscot Manor, Douglasdale, Jhb
Telephone: 011 465 1699

Contact person: Warren Kretzinger
Email: warren@crossmanpape.co.za
Cell: 083 324 4371

Analyses in mg/ℓ	Sample Identification			
	TP3 (0.5-1.3)	TP6 (0.6-1.35)	TP24 (0.6-1.4)	TP63 (0.0-0.5)
Sample Number	117189	117190	117191	117192
pH Value at 25°C	4.0	4.4	7.9	8.0
Electrical Conductivity	13.5	13.4	15.8	25.1
Alkalinity as CaCO ₃	8	8	56	76
Acidity as CaCO ₃	<5	<5	<5	<5
Resistivity (ohm.cm) (calc)	7407	7463	6329	3984
Water content (%)	10.2	7.1	7.3	9.2
Sulphide as S ²⁻	2.9	4.0	6.8	1.3
Chloride as Cl	7	5	2	2
Water Soluble Sulphate as SO ₄	29	39	12	30
Acid Soluble Sulphate as SO ₄ *	<5	12	30	122

[*] Colour interference

S. Laubscher
Assistant Geochemistry Project Manager

The information contained in this report is relevant only to the sample/samples supplied to **WATERLAB (Pty) Ltd**. Any further use of the above information is not the responsibility or liability of **WATERLAB (Pty) Ltd**. Except for the full report, parts of this report may not be reproduced without written approval of **WATERLAB (Pty) Ltd**.

CERTIFICATE OF ANALYSES
DIN 50 929

Date received: 2021-01-26
Project number: 1000

Report number: 97570

Date completed: 2021-02-15
Order number:

Client name: Crossman Pape & Associates
Address: 7 Manor Close, Norscot Manor, Douglasdale, Jhb
Telephone: 011 465 1699

Contact person: Warren Kretzinger
Email: warren@crossmanpape.co.za
Cell: 083 324 4371

Analyses in mg/ℓ	Sample Identification		
	TP64 (0.7-0.85)	TP5 (0.0-0.7)	TP28 (0.3-1.9)
Sample Number	117193	117194	117195
pH Value at 25°C	5.0	5.3	5.9
Electrical Conductivity	6.2	16.1	21.3
Alkalinity as CaCO ₃	8	8	28
Acidity as CaCO ₃	<5	<5	<5
Resistivity (ohm.cm) (calc)	16129	6211	4695
Water content (%)	13.7	6.8	17.2
Sulphide as S ²⁻	0.4	9.8	0.7
Chloride as Cl	<2	5	<2
Water Soluble Sulphate as SO ₄	19	21	42
Acid Soluble Sulphate as SO ₄ *	<5	<5	102

[*] Colour interference

S. Laubscher
Assistant Geochemistry Project Manager

The information contained in this report is relevant only to the sample/samples supplied to **WATERLAB (Pty) Ltd**. Any further use of the above information is not the responsibility or liability of **WATERLAB (Pty) Ltd**. Except for the full report, parts of this report may not be reproduced without written approval of **WATERLAB (Pty) Ltd**.

WATERLAB (PTY) LTD

CONVERSION OF RESULTS

Date received:	26-01-21	Date Completed:	15-02-21
Project number:	1000	Report number:	97570
Client name:	Crossman Pape & Associates	Contact person:	Warren Kretzinger
Address:	7 Manor Close, Norscot Manor, Douglasdale, Jhb	Email:	warren@crossmanpape.co.za
Telephone:	011 465 1699	Cell:	083 324 4371

Sample number	Chloride as Cl in mg/l	Chloride as Cl mg/kg	Chloride as Cl mmol/kg
Det. Limit	<2	<4	<0.113
117189	7	14	0.395
117190	5	10	0.282
117191	2	4	0.113
117192	2	4	0.113
117193	<2	<4	<0.113
117194	5	10	0.282
117195	<2	<4	<0.113

Sample number	Water Soluble Sulphate As SO ₄ in mg/l	Water Soluble Sulphate As SO ₄ mg/kg	Water Soluble Sulphate As SO ₄ mmol/kg
Det. Limit	<2	<4	<0.042
117189	29	58	0.604
117190	39	78	0.812
117191	12	24	0.250
117192	30	60	0.625
117193	19	38	0.396
117194	21	42	0.437
117195	42	84	0.874

Sample number	Acid Soluble Sulphate As SO ₄ in mg/l	Acid Soluble Sulphate As SO ₄ mg/kg	Acid Soluble Sulphate As SO ₄ mmol/kg
Det. Limit	<5	<20	<0.104
117189	<5	<20	<0.104
117190	12	24	0.250
117191	30	60	0.625
117192	122	244	2.54
117193	<5	<20	<0.104
117194	<5	<20	<0.104
117195	102	204	2.12

Sample number	Total Alkalinity (mg/l)	Total Alkalinity (mg/kg)	Total Alkalinity (mmol/kg)
Det. Limit	<5	<10	<0.100
117189	8	16	0.160
117190	8	16	0.160
117191	56	112	1.119
117192	76	152	1.519
117193	8	16	0.160
117194	8	16	0.160
117195	28	56	0.559

Sample number	Total Acidity (mg/l)	Total Acidity (mg/kg)	Total Acidity (mmol/kg)
Det. Limit	<5	<10	<0.100
117189	<5	<10	<0.100
117190	<5	<10	<0.100
117191	<5	<10	<0.100
117192	<5	<10	<0.100
117193	<5	<10	<0.100
117194	<5	<10	<0.100
117195	<5	<10	<0.100

Sample number	Water Soluble Sulphide As S ²⁻ in mg/l	Water Soluble Sulphide As S ²⁻ mg/kg	Water Soluble Sulphide As S ²⁻ mmol/kg
	<5	<10	<0.312
117189	2.9	5.80	0.181
117190	4.0	8.00	0.249
117191	6.8	14	0.424
117192	1.3	2.60	0.081
117193	0.4	0.800	0.025
117194	9.8	20	0.611
117195	0.7	1.40	0.044